



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 103

### Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

CPU2017 License: 9006


Test Date: May-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jan-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

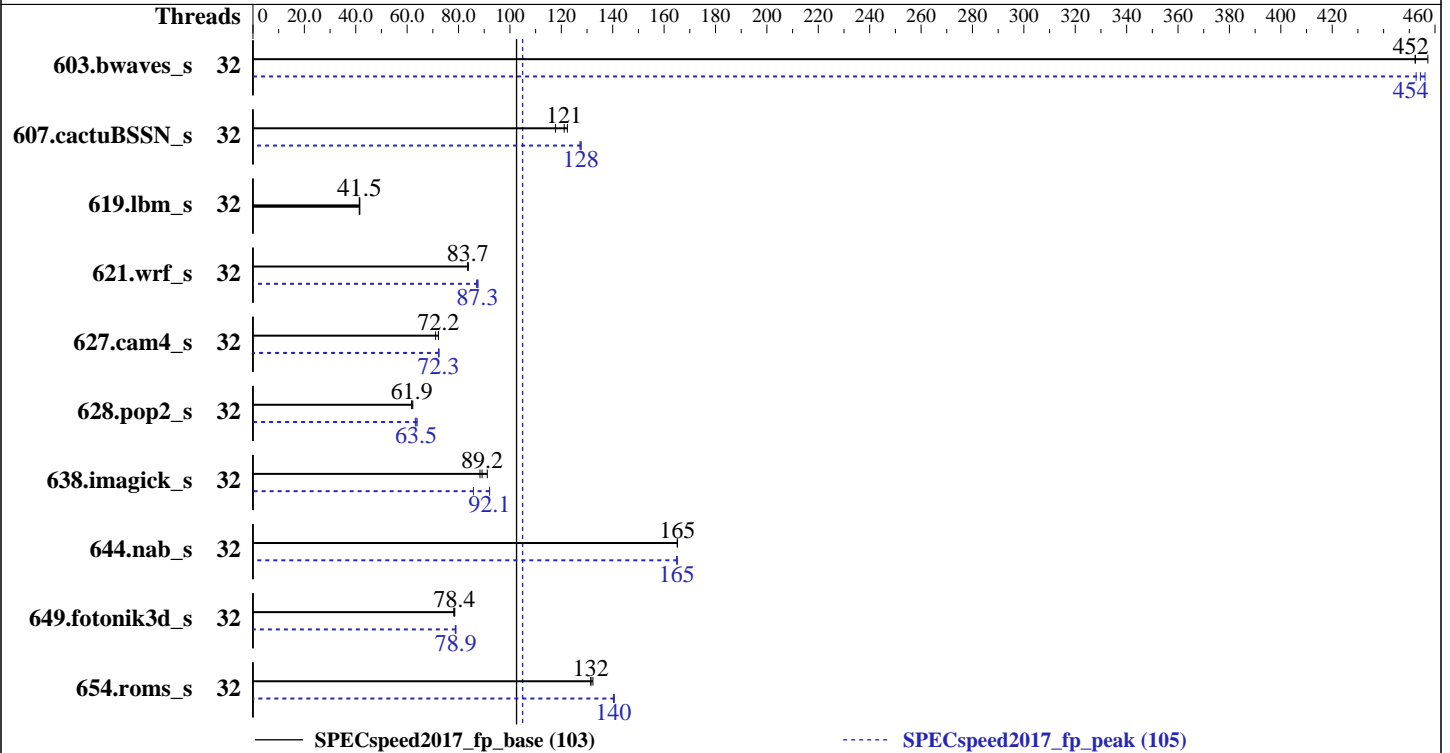

### Hardware

CPU Name: Intel Xeon Gold 6130  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 32 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 1 TB SATA, 7200 RPM  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Kernel 3.10.0-693.21.1.el7.x86\_64  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Version F21 02/22/2018 released Apr-2018  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 103

Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: May-2018  
Hardware Availability: Jan-2018  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	130	452	129	457	<b>130</b>	<b>452</b>	32	129	456	<b>130</b>	<b>454</b>	130	453
607.cactuBSSN_s	32	142	118	<b>138</b>	<b>121</b>	136	122	32	131	127	131	128	<b>131</b>	<b>128</b>
619.lbm_s	32	<b>126</b>	<b>41.5</b>	127	41.4	126	41.6	32	<b>126</b>	<b>41.5</b>	127	41.4	126	41.6
621.wrf_s	32	158	83.6	158	83.8	<b>158</b>	<b>83.7</b>	32	151	87.6	<b>151</b>	<b>87.3</b>	152	87.1
627.cam4_s	32	<b>123</b>	<b>72.2</b>	123	72.2	125	71.1	32	122	72.4	<b>123</b>	<b>72.3</b>	123	72.2
628.pop2_s	32	192	61.7	<b>192</b>	<b>61.9</b>	191	62.2	32	<b>187</b>	<b>63.5</b>	188	63.2	186	63.9
638.imagick_s	32	<b>162</b>	<b>89.2</b>	158	91.2	163	88.4	32	168	85.8	157	92.1	<b>157</b>	<b>92.1</b>
644.nab_s	32	<b>106</b>	<b>165</b>	106	165	106	165	32	106	165	106	165	<b>106</b>	<b>165</b>
649.fotonik3d_s	32	117	78.1	116	78.5	<b>116</b>	<b>78.4</b>	32	116	78.7	<b>116</b>	<b>78.9</b>	115	79.0
654.roms_s	32	<b>120</b>	<b>132</b>	120	131	119	132	32	112	141	112	140	<b>112</b>	<b>140</b>

SPECspeed2017\_fp\_base = 103

SPECspeed2017\_fp\_peak = 105

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 103

### Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2018  
**Hardware Availability:** Jan-2018  
**Software Availability:** Mar-2018

## Platform Notes

### BIOS Settings:

ENERGY\_PERF\_BIAS\_CFG mode: Performance  
Hyper-Threading [ALL]: Disable  
LLC dead line alloc: Disable  
Patrol Scrub: Disable  
DCU Streamer Prefetcher: Disable  
Adjacent Cache Prefetch: Disable  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on dl20h Sun May 27 04:21:04 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
cpu cores      : 16
siblings       : 16
physical 0:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

### From lscpu:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          32
On-line CPU(s) list:  0-31
Thread(s) per core:  1
Core(s) per socket:  16
Socket(s):       2
NUMA node(s):    2
Vendor ID:       GenuineIntel
CPU family:      6
Model:           85
Model name:      Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:        4
CPU MHz:         1798.781
CPU max MHz:     3700.0000
CPU min MHz:     1000.0000
BogoMIPS:        4200.00
Virtualization:  VT-x
L1d cache:      32K
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 103

Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: May-2018  
Hardware Availability: Jan-2018  
Software Availability: Mar-2018

### Platform Notes (Continued)

```

L1i cache:          32K
L2 cache:           1024K
L3 cache:           22528K
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 195236 MB
node 0 free: 190267 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 196608 MB
node 1 free: 192050 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

```

```

From /proc/meminfo
MemTotal:      394644496 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 103

### Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** May-2018  
**Hardware Availability:** Jan-2018  
**Software Availability:** Mar-2018

## Platform Notes (Continued)

```
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux dl20h 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 27 04:15
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  909G  334G  529G  39% /
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS GIGABYTE F21 02/22/2018
Memory:
4x NO DIMM NO DIMM
1x SK Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666
11x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 619.lbm_s(peak)
-----

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
FC 607.cactuBSSN_s(base)
=====
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017\_fp\_base = 103

Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: May-2018  
Hardware Availability: Jan-2018  
Software Availability: Mar-2018

## Compiler Version Notes (Continued)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 607.cactuBSSN_s(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 621.wrf_s(peak) 628.pop2_s(peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017\_fp\_base = 103

Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

-DSPEC\_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017\_fp\_base = 103

Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte

## Base Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017\_fp\_base = 103

Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC\_OPENMP

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -DSPEC\_SUPPRESS\_OPENMP  
-DSPEC\_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4\_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs -align array32byte

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP -nostandard-realloc-lhs  
-align array32byte



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017\_fp\_base = 103

Express5800/D120h (Intel Xeon Gold 6130)

SPECspeed2017\_fp\_peak = 105

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Peak Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-05-26 15:21:03-0400.

Report generated on 2018-10-31 18:02:28 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.