SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 9008 V5 (Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 597

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

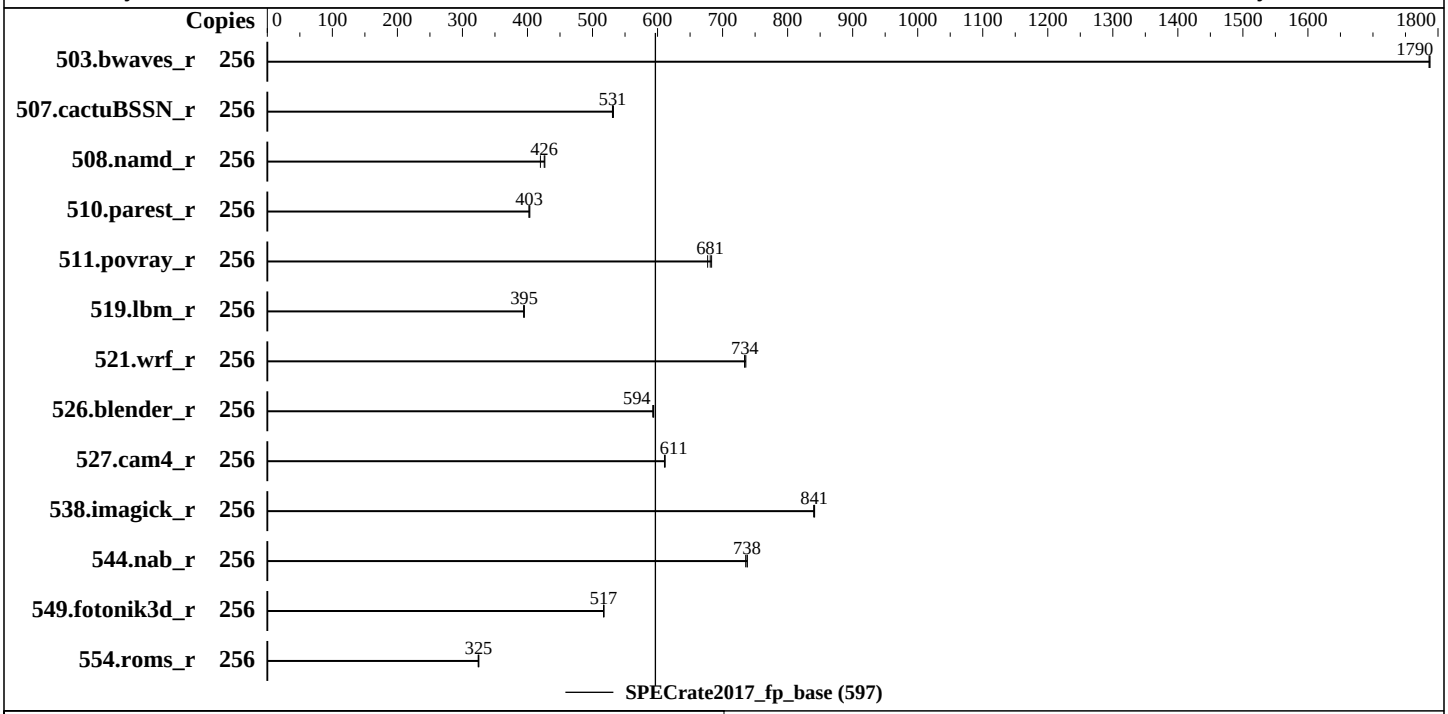

Hardware

CPU Name:	Intel Xeon Platinum 8153
Max MHz.:	2800
Nominal:	2000
Enabled:	128 cores, 8 chips, 2 threads/core
Orderable:	2,4,6,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	2 x 900 GB SAS HDD 10K RPM, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 4.4.120-92.70-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 0.80 released Feb-2018
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 9008 V5 (Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 597

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	1436	1790	1437	1790	**1437**	**1790**							
507.cactuBSSN_r	256	**610**	**531**	609	532	611	531							
508.namd_r	256	579	420	570	427	**571**	**426**							
510.parest_r	256	**1664**	**403**	1659	404	1664	402							
511.povray_r	256	875	683	**878**	**681**	883	677							
519.lbm_r	256	685	394	**683**	**395**	683	395							
521.wrf_r	256	782	734	**781**	**734**	779	736							
526.blender_r	256	**657**	**594**	658	593	656	594							
527.cam4_r	256	732	612	733	611	**732**	**611**							
538.imagick_r	256	757	842	758	840	**757**	**841**							
544.nab_r	256	584	738	**584**	**738**	586	735							
549.fotonik3d_r	256	1927	518	1930	517	**1929**	**517**							
554.roms_r	256	1255	324	**1252**	**325**	1251	325							

SPECrate2017_fp_base = 597

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS configuration:
 Sub NUMA Cluster (SNC) set to enabled
 IMC (Integrated memory controller) Interleaving set to 1 way interleave
 Xtended Prediction Table (XPT) Prefetch set to Enable
 Memory Patrol Scrub set to Disable
 Last Level Cache (LLC) Prefetch set to Disable
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-0mnb Wed Jun  6 05:14:13 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
       8  "physical id"s (chips)
       256 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                256
      On-line CPU(s) list:   0-255
```

(Continued on next page)

Platform Notes (Continued)

```
      Thread(s) per core:    2
      Core(s) per socket:    16
      Socket(s):             8
      NUMA node(s):          16
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
      Stepping:              4
      CPU MHz:               2000.040
      BogoMIPS:              4000.08
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              22528K
      NUMA node0 CPU(s):     0-3,8-11,128-131,136-139
      NUMA node1 CPU(s):     4-7,12-15,132-135,140-143
      NUMA node2 CPU(s):     16-19,24-27,144-147,152-155
      NUMA node3 CPU(s):     20-23,28-31,148-151,156-159
      NUMA node4 CPU(s):     32-35,40-43,160-163,168-171
      NUMA node5 CPU(s):     36-39,44-47,164-167,172-175
      NUMA node6 CPU(s):     48-51,56-59,176-179,184-187
      NUMA node7 CPU(s):     52-55,60-63,180-183,188-191
      NUMA node8 CPU(s):     64-67,72-75,192-195,200-203
      NUMA node9 CPU(s):     68-71,76-79,196-199,204-207
      NUMA node10 CPU(s):    80-83,88-91,208-211,216-219
      NUMA node11 CPU(s):    84-87,92-95,212-215,220-223
      NUMA node12 CPU(s):    96-99,104-107,224-227,232-235
      NUMA node13 CPU(s):    100-103,108-111,228-231,236-239
      NUMA node14 CPU(s):    112-115,120-123,240-243,248-251
      NUMA node15 CPU(s):    116-119,124-127,244-247,252-255
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
      intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
      avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
      xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 22528 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
```

(Continued on next page)

Platform Notes (Continued)

```
 physical chip.
   available: 16 nodes (0-15)
   node 0 cpus: 0 1 2 3 8 9 10 11 128 129 130 131 136 137 138 139
   node 0 size: 94993 MB
   node 0 free: 93735 MB
   node 1 cpus: 4 5 6 7 12 13 14 15 132 133 134 135 140 141 142 143
   node 1 size: 96762 MB
   node 1 free: 96324 MB
   node 2 cpus: 16 17 18 19 24 25 26 27 144 145 146 147 152 153 154 155
   node 2 size: 96762 MB
   node 2 free: 96364 MB
   node 3 cpus: 20 21 22 23 28 29 30 31 148 149 150 151 156 157 158 159
   node 3 size: 96762 MB
   node 3 free: 96439 MB
   node 4 cpus: 32 33 34 35 40 41 42 43 160 161 162 163 168 169 170 171
   node 4 size: 96762 MB
   node 4 free: 96437 MB
   node 5 cpus: 36 37 38 39 44 45 46 47 164 165 166 167 172 173 174 175
   node 5 size: 96762 MB
   node 5 free: 96366 MB
   node 6 cpus: 48 49 50 51 56 57 58 59 176 177 178 179 184 185 186 187
   node 6 size: 96762 MB
   node 6 free: 96246 MB
   node 7 cpus: 52 53 54 55 60 61 62 63 180 181 182 183 188 189 190 191
   node 7 size: 96762 MB
   node 7 free: 96439 MB
   node 8 cpus: 64 65 66 67 72 73 74 75 192 193 194 195 200 201 202 203
   node 8 size: 96762 MB
   node 8 free: 96425 MB
   node 9 cpus: 68 69 70 71 76 77 78 79 196 197 198 199 204 205 206 207
   node 9 size: 96762 MB
   node 9 free: 96438 MB
   node 10 cpus: 80 81 82 83 88 89 90 91 208 209 210 211 216 217 218 219
   node 10 size: 96762 MB
   node 10 free: 96446 MB
   node 11 cpus: 84 85 86 87 92 93 94 95 212 213 214 215 220 221 222 223
   node 11 size: 96762 MB
   node 11 free: 96447 MB
   node 12 cpus: 96 97 98 99 104 105 106 107 224 225 226 227 232 233 234 235
   node 12 size: 96762 MB
   node 12 free: 96450 MB
   node 13 cpus: 100 101 102 103 108 109 110 111 228 229 230 231 236 237 238 239
   node 13 size: 96762 MB
   node 13 free: 96462 MB
   node 14 cpus: 112 113 114 115 120 121 122 123 240 241 242 243 248 249 250 251
   node 14 size: 96762 MB
   node 14 free: 96413 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 15 cpus: 116 117 118 119 124 125 126 127 244 245 246 247 252 253 254 255
   node 15 size: 96605 MB
   node 15 free: 96210 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20
     1:  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20
     2:  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20
     3:  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20
     4:  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20
     5:  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20
     6:  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20
     7:  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20
     8:  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20
     9:  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20
    10:  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20
    11:  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20
    12:  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20
    13:  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20
    14:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20
    15:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10

  From /proc/meminfo
     MemTotal:       1583378172 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP2

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
    Linux linux-0mnb 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 5 Jun 5 22:27

 SPEC is set to: /home/cpu2017
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda4      btrfs  1.5T   14G  1.5T   1% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 0.80 02/24/2018
   Memory:
    48x NO DIMM NO DIMM
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-05 17:14:12-0400.
Report generated on 2018-10-31 17:27:32 by CPU2017 PS formatter v6067.
Originally published on 2018-06-26.