# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/A2040e
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_int_base = 485

SPECrate2017_int_peak = 513

**CPU2017 License:** 9006
**Test Sponsor:** NEC Corporation
**Tested by:** NEC Corporation

**Test Date:** Jun-2018
**Hardware Availability:** Jun-2018
**Software Availability:** Mar-2018

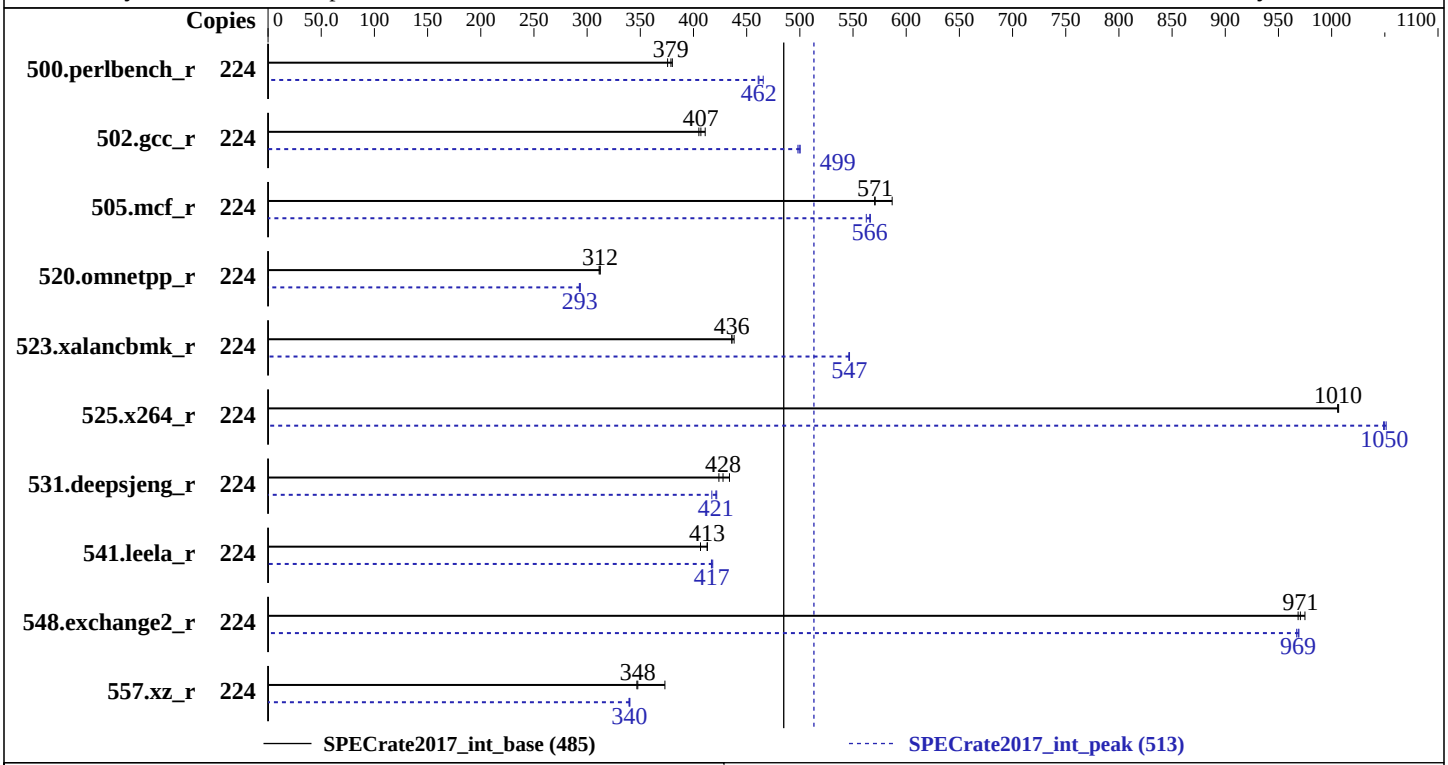


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8176 |
| Max MHz.: | 3800 |
| Nominal: | 2100 |
| Enabled: | 112 cores, 4 chips, 2 threads/core |
| Orderable: | 2,4 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 38.5 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R) |
| Storage: | 800 GB tmpfs |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 SP3 (x86_64) kernel 4.4.120-94.17-default |
| Compiler: | C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux |
| Parallel: | No |
| Firmware: | Version 5.7.0115 04/17/2018 released Jun-2018 |
| File System: | tmpfs |
| System State: | Run level 5 (multi-user w/GUI) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc memory allocator library V5.0.1 |

# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/A2040e
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_int_base = 485

SPECrate2017_int_peak = 513

**CPU2017 License:** 9006
**Test Sponsor:** NEC Corporation
**Tested by:** NEC Corporation

**Test Date:** Jun-2018
**Hardware Availability:** Jun-2018
**Software Availability:** Mar-2018

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 224 | 938 | 380 | **941** | **379** | 949 | 376 | 224 | 766 | 466 | **773** | **462** | 774 | 461 |
| 502.gcc_r | 224 | **779** | **407** | 783 | 405 | 772 | 411 | 224 | 634 | 500 | **635** | **499** | 637 | 498 |
| 505.mcf_r | 224 | 617 | 587 | **634** | **571** | 635 | 570 | 224 | 639 | 566 | 644 | 562 | **640** | **566** |
| 520.omnetpp_r | 224 | 941 | 312 | **942** | **312** | 944 | 311 | 224 | 1001 | 294 | 1004 | 293 | **1002** | **293** |
| 523.xalancbmk_r | 224 | 542 | 436 | **542** | **436** | 540 | 438 | 224 | **433** | **547** | 433 | 547 | 433 | 546 |
| 525.x264_r | 224 | **390** | **1010** | 390 | 1010 | 390 | 1010 | 224 | **374** | **1050** | 374 | 1050 | 373 | 1050 |
| 531.deepsjeng_r | 224 | 592 | 434 | **600** | **428** | 606 | 424 | 224 | 615 | 417 | 609 | 422 | **610** | **421** |
| 541.leela_r | 224 | 898 | 413 | 912 | 407 | **899** | **413** | 224 | **889** | **417** | 890 | 417 | 887 | 418 |
| 548.exchange2_r | 224 | **605** | **971** | 602 | 975 | 606 | 968 | 224 | 606 | 969 | 607 | 967 | **606** | **969** |
| 557.xz_r | 224 | 648 | 373 | **696** | **348** | 698 | 347 | 224 | **712** | **340** | 713 | 339 | 711 | 340 |

**SPECrate2017_int_base = 485**

**SPECrate2017_int_peak = 513**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=800g tmpfs /home
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/SPEC/lib/ia32:/home/SPEC/lib/intel64:/home/SPEC/je5.0.1-32:/home/SPEC/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3 >       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
```

**(Continued on next page)**

## General Notes (Continued)

```
 jemalloc: sources avilable from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
 BIOS Settings:
  Memory RAS Mode: SDDC mode
  VT-x : Disabled
  Processor C6 Report : Disabled
  OS Performance Tuning : Disabled
  Energy Performance : Performance
  Patrol Scrub : Disabled
  DCU Streamer Prefetcher : Disabled
  Memory P.E. Retry : Disabled
  Sub NUMA Clustering : Enabled
  Dead Line LLC Allocation : Disabled
 Sysinfo program /home/SPEC/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-37c1 Thu Jun  7 04:27:56 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
       4  "physical id"s (chips)
       224 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                224
      On-line CPU(s) list:   0-223
      Thread(s) per core:    2
      Core(s) per socket:    28
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
      Stepping:              4
      CPU MHz:               2101.000
      CPU max MHz:           2101.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4189.96
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
      NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
      NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
      NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
      NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
      NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
      NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
      NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

 /proc/cpuinfo cache data
    cache size : 39424 KB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
  129 133 134 135
  node 0 size: 192002 MB
  node 0 free: 185434 MB
  node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
  132 136 137 138 139
  node 1 size: 193532 MB
  node 1 free: 193087 MB
  node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
  155 156 157 161 162 163
  node 2 size: 193532 MB
  node 2 free: 193057 MB
  node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
  159 160 164 165 166 167
  node 3 size: 193532 MB
  node 3 free: 193326 MB
  node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
  183 184 185 189 190 191
  node 4 size: 193532 MB
  node 4 free: 193056 MB
  node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
  187 188 192 193 194 195
  node 5 size: 193532 MB
  node 5 free: 191932 MB
  node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
  210 211 212 213 217 218 219
  node 6 size: 193532 MB
  node 6 free: 192814 MB
  node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
  209 214 215 216 220 221 222 223
  node 7 size: 193385 MB
  node 7 free: 192943 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  15  15  15  15  15  15
    1:  11  10  15  15  15  15  15  15
    2:  15  15  10  11  15  15  15  15
    3:  15  15  11  10  15  15  15  15
    4:  15  15  15  15  10  11  15  15
    5:  15  15  15  15  11  10  15  15
    6:  15  15  15  15  15  15  10  11
    7:  15  15  15  15  15  15  11  10

From /proc/meminfo
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    MemTotal:       1583698972 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP3

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-37c1 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 5 Jun 7 04:02

 SPEC is set to: /home/SPEC
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  800G  9.1G  791G   2% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 5.7.0115 04/17/2018
   Memory:
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
     525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 502.gcc_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

## Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

**(Continued on next page)**

## Base Other Flags (Continued)

Fortran benchmarks:
-m64

## Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

## Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

**(Continued on next page)**

# Peak Optimization Flags (Continued)

505.mcf_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

525.x264_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc`

557.xz_r: `Same as 505.mcf_r`

C++ benchmarks:

520.omnetpp_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

523.xalancbmk_r: `-L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32 -Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

531.deepsjeng_r: `Same as 520.omnetpp_r`

541.leela_r: `Same as 520.omnetpp_r`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

# Peak Other Flags

C benchmarks (except as noted below):
`-m64 -std=c11`

502.gcc_r: `-m32 -std=c11`

C++ benchmarks (except as noted below):
`-m64`

523.xalancbmk_r: `-m32`

**(Continued on next page)**

# Peak Other Flags (Continued)

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-SKL-A2040e-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-SKL-A2040e-RevA.xml


SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-06 15:27:55-0400.
Report generated on 2018-10-31 17:21:55 by CPU2017 PS formatter v6067.
Originally published on 2018-06-26.