



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Mar-2018

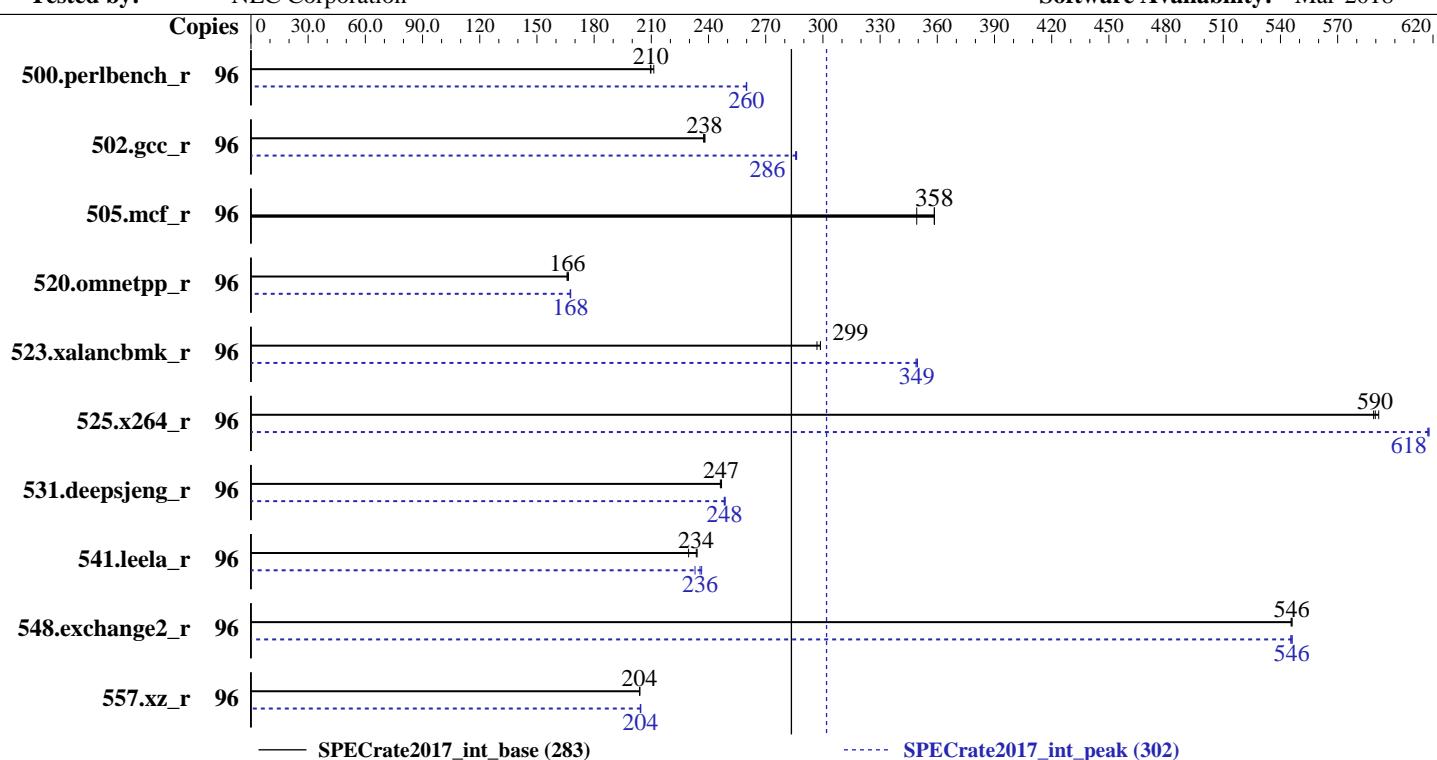

— SPECrate2017_int_base (283)

····· SPECrate2017_int_peak (302)

Hardware

CPU Name: Intel Xeon Gold 6136
Max MHz.: 3700
Nominal: 3000
Enabled: 48 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 24.75 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 800 GB tmpfs
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
Compiler: kernel 4.4.120-94.17-default
C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Version 5.7.0115 04/17/2018 released Jun-2018
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Date: Jun-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jun-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	729	210	723	211	728	210	96	588	260	588	260	588	260	588	260
502.gcc_r	96	572	238	573	237	571	238	96	476	286	475	286	475	286	475	286
505.mcf_r	96	433	358	433	358	444	349	96	433	358	433	358	444	349	444	349
520.omnetpp_r	96	756	167	759	166	760	166	96	751	168	752	168	752	167	752	167
523.xalancbmk_r	96	339	299	341	297	339	299	96	290	350	291	349	290	349	290	349
525.x264_r	96	284	592	285	590	285	589	96	272	618	272	617	272	618	272	618
531.deepsjeng_r	96	447	246	446	247	446	247	96	443	248	443	248	442	249	442	249
541.leela_r	96	693	230	679	234	681	234	96	672	236	675	236	682	233	682	233
548.exchange2_r	96	461	546	461	546	461	546	96	461	546	461	545	461	546	461	546
557.xz_r	96	508	204	509	204	509	204	96	508	204	508	204	507	204	507	204

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem can be set with:

```
mount -t tmpfs -o size=800g tmpfs /home
```

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/SPEC/lib/ia32:/home/SPEC/lib/intel64:/home/SPEC/je5.0.1-32:/home/SPEC/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Mar-2018

General Notes (Continued)

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Memory RAS Mode: SDDC mode

VT-x : Disabled

Processor C6 Report : Disabled

OS Performance Tuning : Disabled

Energy Performance : Performance

Patrol Scrub : Disabled

DCU Streamer Prefetcher : Disabled

Memory P.E. Retry : Disabled

Sub NUMA Clustering : Enabled

Dead Line LLC Allocation : Disabled

Sysinfo program /home/SPEC/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-37c1 Sat Jun 16 05:35:39 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz

4 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26

physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26

physical 2: cores 0 1 2 3 4 8 9 11 17 18 19 20

physical 3: cores 0 1 3 9 10 16 18 19 24 25 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Date: Jun-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jun-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	96
On-line CPU(s) list:	0-95
Thread(s) per core:	2
Core(s) per socket:	12
Socket(s):	4
NUMA node(s):	8
Vendor ID:	GenuineIntel
CPU family:	6
Model:	85
Model name:	Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
Stepping:	4
CPU MHz:	3001.000
CPU max MHz:	3001.0000
CPU min MHz:	1200.0000
BogoMIPS:	5985.70
Virtualization:	VT-x
L1d cache:	32K
L1i cache:	32K
L2 cache:	1024K
L3 cache:	25344K
NUMA node0 CPU(s):	0-2,5,7,10,48-50,53,55,58
NUMA node1 CPU(s):	3,4,6,8,9,11,51,52,54,56,57,59
NUMA node2 CPU(s):	12-14,17,19,22,60-62,65,67,70
NUMA node3 CPU(s):	15,16,18,20,21,23,63,64,66,68,69,71
NUMA node4 CPU(s):	24-26,29,30,32,72-74,77,78,80
NUMA node5 CPU(s):	27,28,31,33-35,75,76,79,81-83
NUMA node6 CPU(s):	36,37,39,41,44,45,84,85,87,89,92,93
NUMA node7 CPU(s):	38,40,42,43,46,47,86,88,90,91,94,95
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 7 10 48 49 50 53 55 58
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Date: Jun-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jun-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

```
node 0 size: 192005 MB
node 0 free: 191639 MB
node 1 cpus: 3 4 6 8 9 11 51 52 54 56 57 59
node 1 size: 193534 MB
node 1 free: 192898 MB
node 2 cpus: 12 13 14 17 19 22 60 61 62 65 67 70
node 2 size: 193534 MB
node 2 free: 193271 MB
node 3 cpus: 15 16 18 20 21 23 63 64 66 68 69 71
node 3 size: 193534 MB
node 3 free: 193399 MB
node 4 cpus: 24 25 26 29 30 32 72 73 74 77 78 80
node 4 size: 193534 MB
node 4 free: 193077 MB
node 5 cpus: 27 28 31 33 34 35 75 76 79 81 82 83
node 5 size: 193534 MB
node 5 free: 193098 MB
node 6 cpus: 36 37 39 41 44 45 84 85 87 89 92 93
node 6 size: 193534 MB
node 6 free: 187457 MB
node 7 cpus: 38 40 42 43 46 47 86 88 90 91 94 95
node 7 size: 193388 MB
node 7 free: 191362 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 15 15 15 15 15 15
 1: 11 10 15 15 15 15 15 15
 2: 15 15 10 11 15 15 15 15
 3: 15 15 11 10 15 15 15 15
 4: 15 15 15 10 11 15 15 15
 5: 15 15 15 11 10 15 15 15
 6: 15 15 15 15 15 10 11 15
 7: 15 15 15 15 15 11 10 15
```

```
From /proc/meminfo
MemTotal:      1583717420 kB
HugePages_Total:    0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Date: Jun-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jun-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
  Linux linux-37c1 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 16 05:23

SPEC is set to: /home/SPEC
  Filesystem      Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  800G  9.1G  791G   2% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS American Megatrends Inc. 5.7.0115 04/17/2018
  Memory:
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
=====
  CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base, peak) 557.xz_r(base, peak)
-----
  icc (ICC) 18.0.0 20170811
  Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====

  CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
  icc (ICC) 18.0.0 20170811
  Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Date: Jun-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jun-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
=====
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
      541.leela_r(peak)
=====
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
FC 548.exchange2_r(base, peak)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Mar-2018

Base Portability Flags (Continued)

525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Mar-2018

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

C++ benchmarks:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECCrate2017_int_base = 283

SPECCrate2017_int_peak = 302

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-SKL-A2040e-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-SKL-A2040e-RevA.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040e
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017_int_base = 283

SPECrate2017_int_peak = 302

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-15 16:35:38-0400.

Report generated on 2018-10-31 18:53:32 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-10.