SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G3 (Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 506

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2018
Hardware Availability: Sep-2017
Software Availability: May-2018

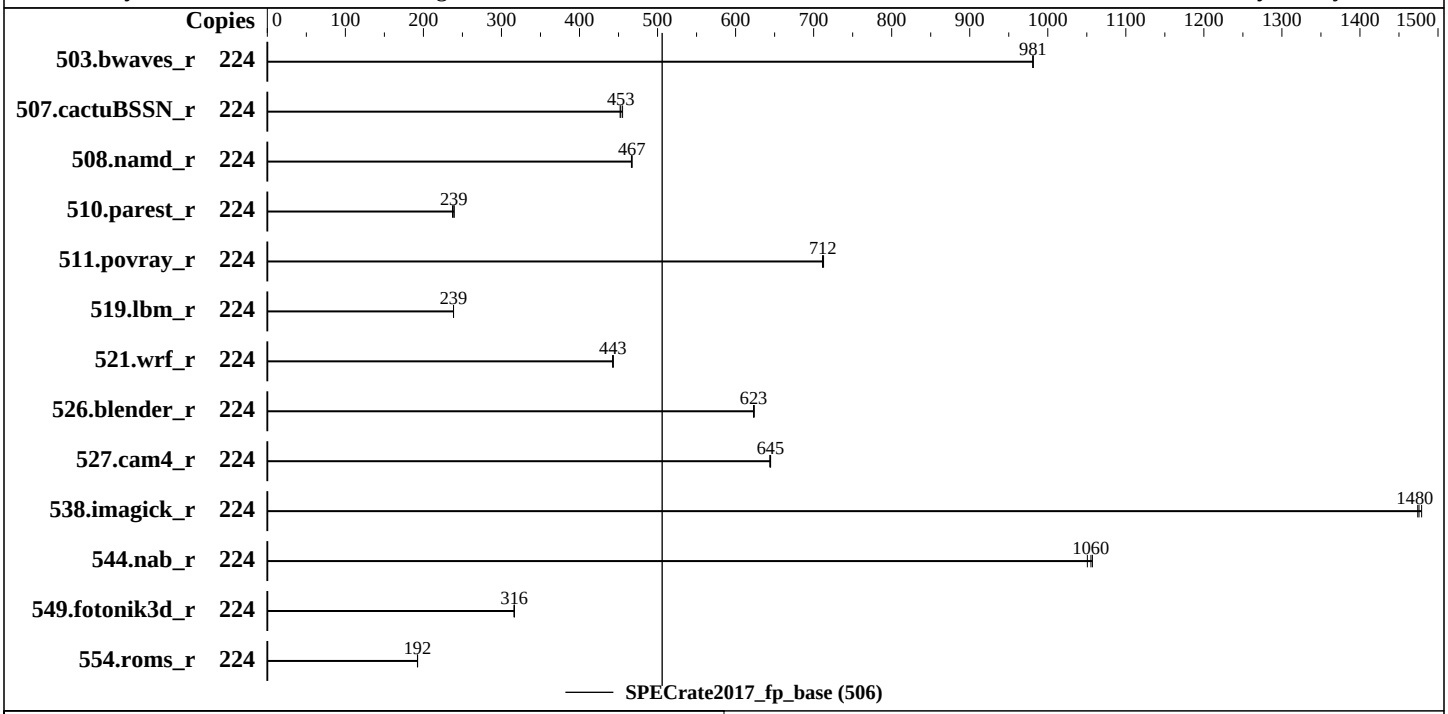

Hardware

CPU Name:	Intel Xeon Platinum 8180
Max MHz.:	3800
Nominal:	2500
Enabled:	112 cores, 4 chips, 2 threads/core
Orderable:	1,2,3,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Storage:	960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 4.4.126-48-default
Compiler:	C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	INSYDE Corp. BIOS Version 1.00.16 Released May-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G3 (Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 506

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2018
Hardware Availability: Sep-2017
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	2289	981	2290	981	**2289**	**981**							
507.cactuBSSN_r	224	627	452	**626**	**453**	623	455							
508.namd_r	224	456	467	**456**	**467**	455	467							
510.parest_r	224	2447	239	2470	237	**2452**	**239**							
511.povray_r	224	734	713	**735**	**712**	735	711							
519.lbm_r	224	989	239	990	239	**990**	**239**							
521.wrf_r	224	**1133**	**443**	1132	443	1134	442							
526.blender_r	224	**547**	**623**	548	623	547	624							
527.cam4_r	224	608	645	**608**	**645**	609	644							
538.imagick_r	224	**378**	**1480**	378	1470	377	1480							
544.nab_r	224	357	1060	359	1050	**357**	**1060**							
549.fotonik3d_r	224	2757	317	**2759**	**316**	2761	316							
554.roms_r	224	1850	192	1849	193	**1849**	**192**							

SPECrate2017_fp_base = 506

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/ia32:/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-32:/home/speccpu/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
Set SNC to Enabled
Set IMC Interleaving to 1-way Interleave
Set C1E to Disabled
Set Power Supply Mode to Performance
Sysinfo program /home/speccpu/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-bc59 Wed Jun 20 15:46:15 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      4  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                224
     On-line CPU(s) list:   0-223
     Thread(s) per core:    2
     Core(s) per socket:    28
     Socket(s):             4
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      Stepping:              4
      CPU MHz:               1000.077
      CPU max MHz:           3800.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4988.55
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
      NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
      NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
      NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
      NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
      NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
      NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
      NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
      retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
      avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
      clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku
      ospke

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
    129 133 134 135
    node 0 size: 94978 MB
    node 0 free: 87417 MB
    node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
    132 136 137 138 139
```

(Continued on next page)

Platform Notes (Continued)

```
   node 1 size: 96759 MB
   node 1 free: 90964 MB
   node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
   155 156 157 161 162 163
   node 2 size: 96759 MB
   node 2 free: 91064 MB
   node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
   159 160 164 165 166 167
   node 3 size: 96759 MB
   node 3 free: 91047 MB
   node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
   183 184 185 189 190 191
   node 4 size: 96759 MB
   node 4 free: 91024 MB
   node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
   187 188 192 193 194 195
   node 5 size: 96759 MB
   node 5 free: 91062 MB
   node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
   210 211 212 213 217 218 219
   node 6 size: 96759 MB
   node 6 free: 90907 MB
   node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
   209 214 215 216 220 221 222 223
   node 7 size: 96596 MB
   node 7 free: 90900 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  20  20  20  20  20  20  20
     1:  20  10  20  20  20  20  20  20
     2:  20  20  10  20  20  20  20  20
     3:  20  20  20  10  20  20  20  20
     4:  20  20  20  20  10  20  20  20
     5:  20  20  20  20  20  10  20  20
     6:  20  20  20  20  20  20  10  20
     7:  20  20  20  20  20  20  20  10

 From /proc/meminfo
    MemTotal:       790664372 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP3

 From /etc/*release* /etc/*version*
    SuSE-release:
```

(Continued on next page)

Platform Notes (Continued)

```
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-bc59 4.4.126-48-default #1 SMP Sat Apr 7 05:22:50 UTC 2018 (f24992c)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Jun 19 16:49

 SPEC is set to: /home/speccpu
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   852G   92G  761G  11% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 1.00.16P00 05/30/2018
   Memory:
    48x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevB.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-20 03:46:14-0400.
Report generated on 2018-10-31 19:03:12 by CPU2017 PS formatter v6067.
Originally published on 2018-07-11.