SPEC® CPU2017 Integer Rate Result

Huawei

Huawei CH242 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_base = 454

SPECrate2017_int_peak = 487

CPU2017 License:	3175	**Test Date:**	Jul-2018
Test Sponsor:	Huawei	**Hardware Availability:**	Jul-2017
Tested by:	Huawei	**Software Availability:**	Jan-2018

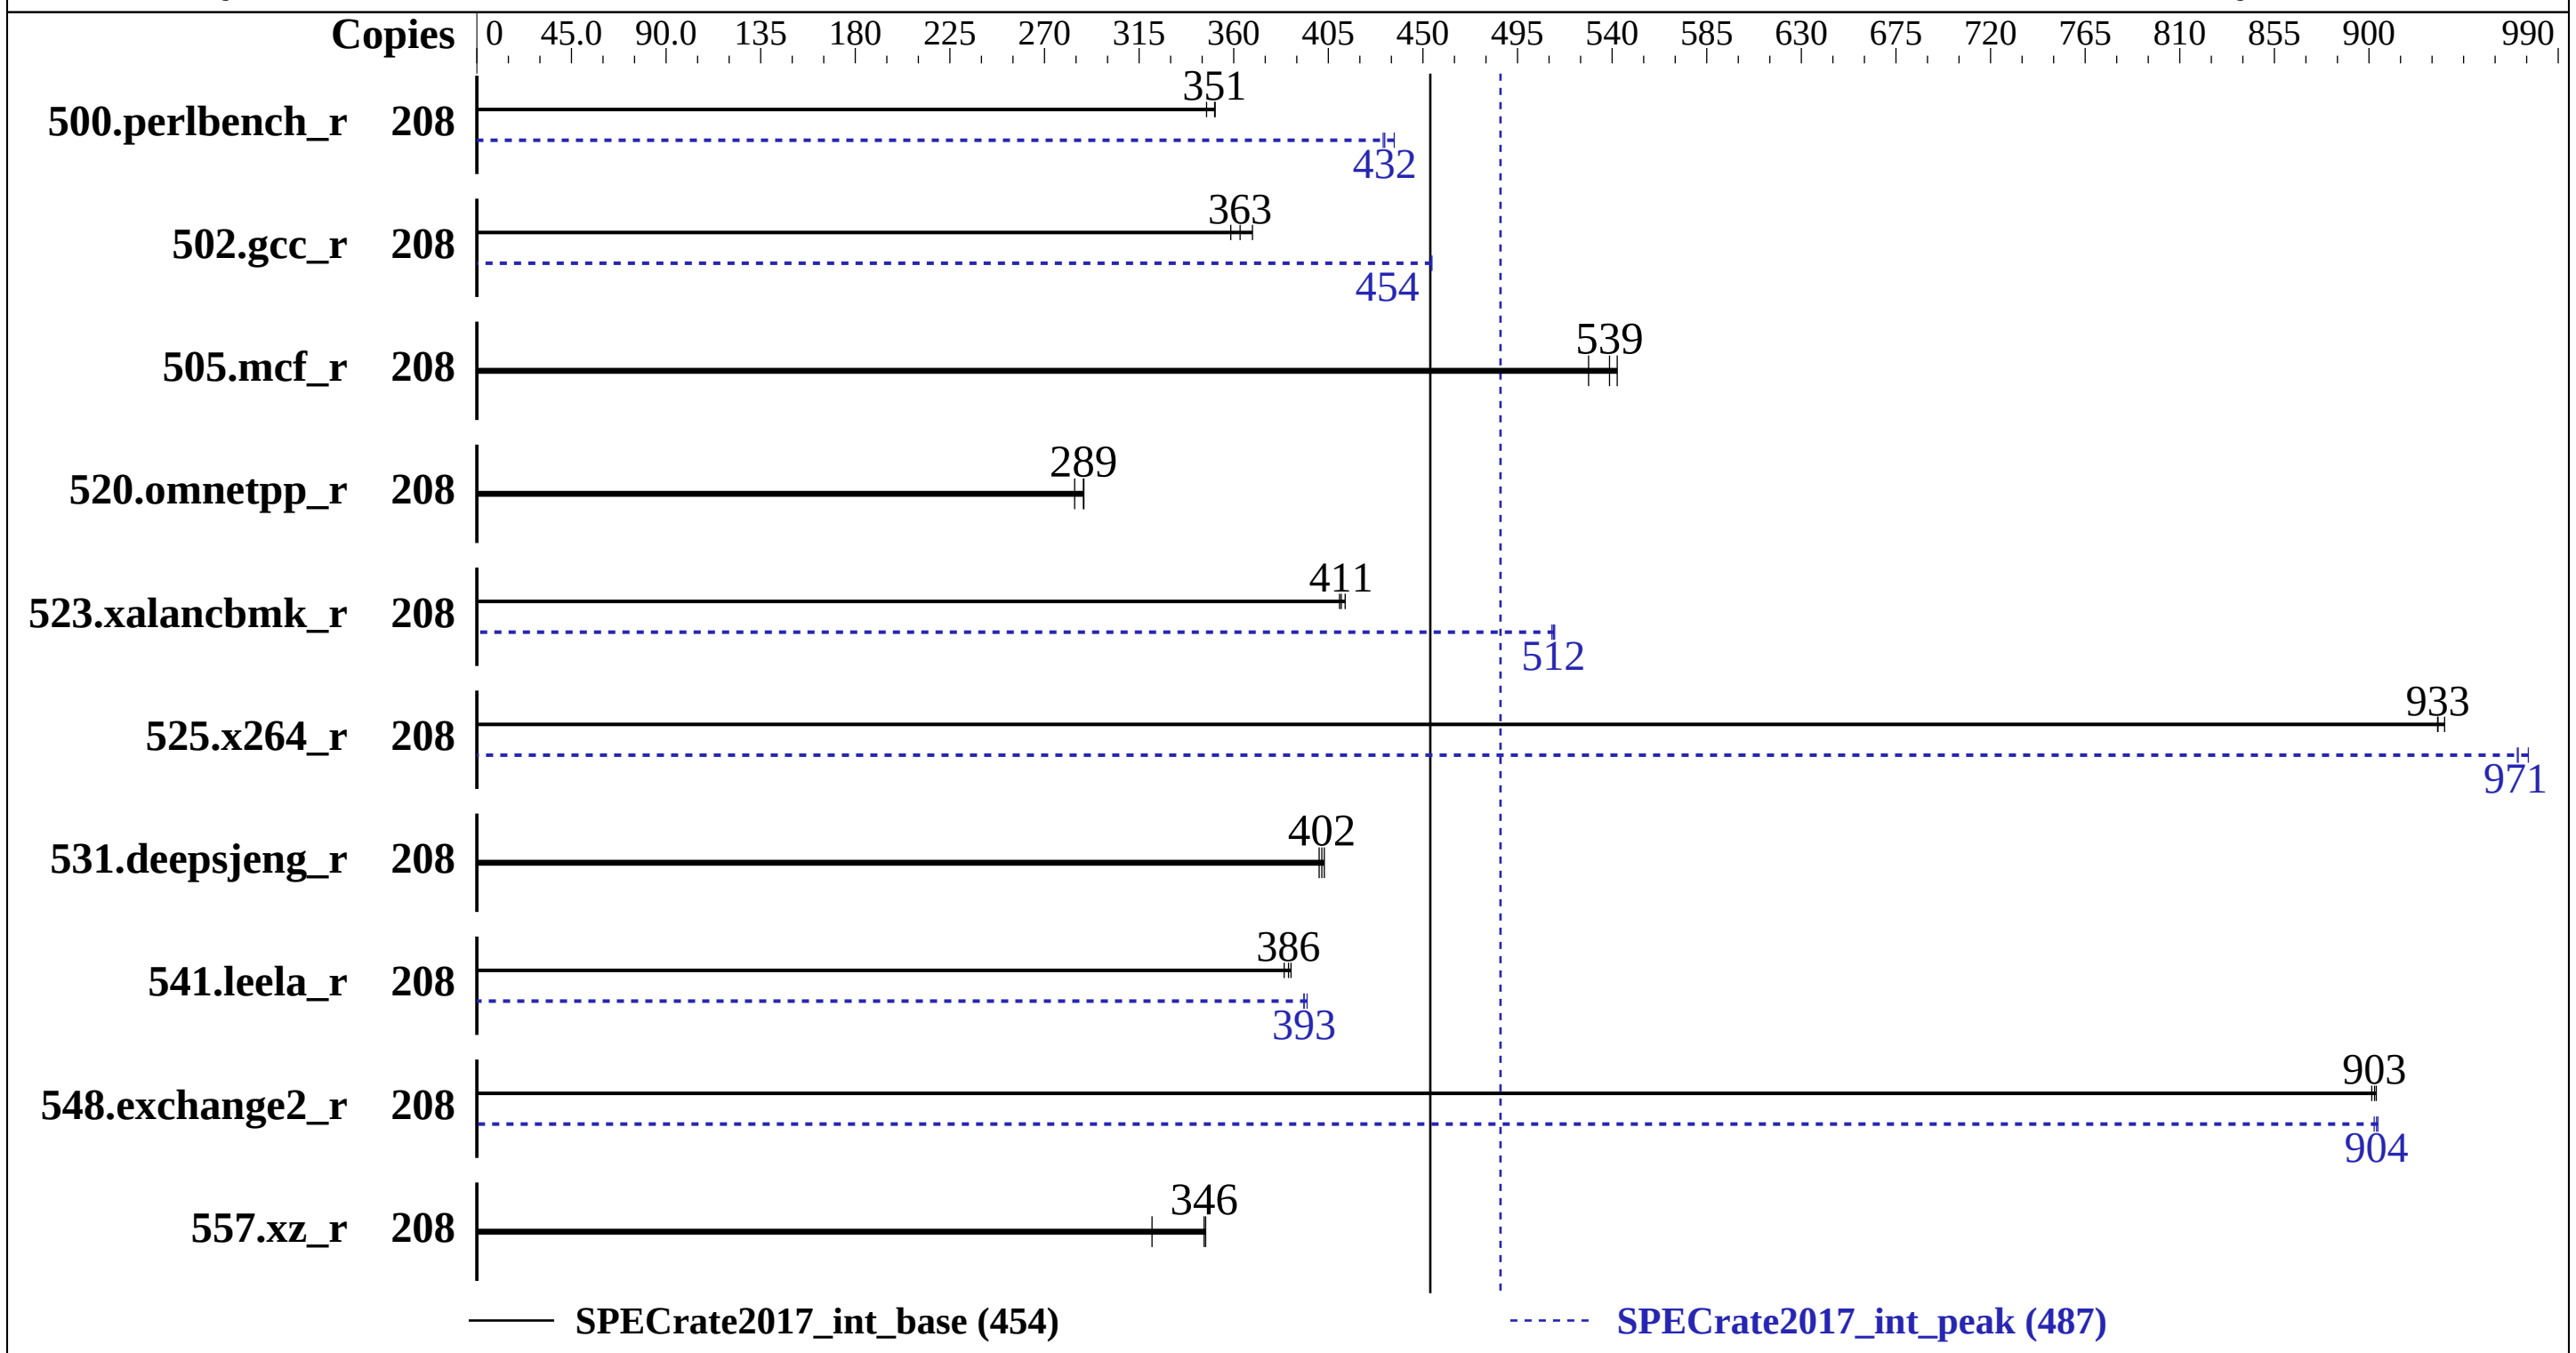

Hardware

CPU Name:	Intel Xeon Platinum 8164
Max MHz.:	3700
Nominal:	2000
Enabled:	104 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 1200 GB SAS, 10000 RPM
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.3 (Maipo) 3.10.0-693.11.6.el7.x86_64
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 0.84 Released Mar-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library V5.0.1;

SPEC CPU2017 Integer Rate Result

Huawei

Huawei CH242 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_base = 454

SPECrate2017_int_peak = 487

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jul-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	208	**944**	**351**	954	347	943	351	208	759	436	768	431	**767**	**432**
502.gcc_r	208	821	359	**811**	**363**	798	369	208	649	454	**649**	**454**	648	454
505.mcf_r	208	620	542	**624**	**539**	636	529	208	620	542	**624**	**539**	636	529
520.omnetpp_r	208	960	284	945	289	**946**	**289**	208	960	284	945	289	**946**	**289**
523.xalancbmk_r	208	**534**	**411**	535	410	532	413	208	428	513	430	511	**429**	**512**
525.x264_r	208	**390**	**933**	391	933	389	936	208	375	971	**375**	**971**	373	976
531.deepsjeng_r	208	591	403	**593**	**402**	595	401	208	591	403	**593**	**402**	595	401
541.leela_r	208	**892**	**386**	897	384	889	387	208	**875**	**393**	876	393	872	395
548.exchange2_r	208	603	903	605	901	**604**	**903**	208	604	902	603	904	**603**	**904**
557.xz_r	208	**649**	**346**	648	347	699	321	208	**649**	**346**	648	347	699	321

SPECrate2017_int_base = **454**

SPECrate2017_int_peak = **487**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/je5.0.1-32:/spec/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 jemalloc: configured and built at default for
 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4,
 and the system compiler gcc 4.8.5;
 jemalloc: sources available from jemalloc.net or
```

(Continued on next page)

General Notes (Continued)

```
https://github.com/jemalloc/jemalloc/releases
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Power Policy Set to Performance
SNC Set to Enabled
IMC Interleaving Set to 1-way Interleave
XPT Prefetch Set to Enabled
Sysinfo program /spec/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost.localdomain Thu Jul  5 01:54:05 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
      4  "physical id"s (chips)
      208 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 26
      siblings  : 52
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
      29
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
      29
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
      29
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
      29

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                208
     On-line CPU(s) list:   0-207
```

(Continued on next page)

Platform Notes (Continued)

```
     Thread(s) per core:     2
     Core(s) per socket:     26
     Socket(s):              4
     NUMA node(s):           8
     Vendor ID:              GenuineIntel
     CPU family:             6
     Model:                  85
     Model name:             Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
     Stepping:               4
     CPU MHz:                2000.000
     BogoMIPS:               4004.38
     Virtualization:         VT-x
     L1d cache:              32K
     L1i cache:              32K
     L2 cache:               1024K
     L3 cache:               36608K
     NUMA node0 CPU(s):      0-3,7-9,13-15,20-22,104-107,111-113,117-119,124-126
     NUMA node1 CPU(s):      4-6,10-12,16-19,23-25,108-110,114-116,120-123,127-129
     NUMA node2 CPU(s):      26-29,33-35,39-41,46-48,130-133,137-139,143-145,150-152
     NUMA node3 CPU(s):      30-32,36-38,42-45,49-51,134-136,140-142,146-149,153-155
     NUMA node4 CPU(s):      52-55,59-61,65-67,72-74,156-159,163-165,169-171,176-178
     NUMA node5 CPU(s):      56-58,62-64,68-71,75-77,160-162,166-168,172-175,179-181
     NUMA node6 CPU(s):      78-81,85-87,91-93,98-100,182-185,189-191,195-197,202-204
     NUMA node7 CPU(s):      82-84,88-90,94-97,101-103,186-188,192-194,198-201,205-207

/proc/cpuinfo cache data
   cache size : 36608 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 104 105 106 107 111 112 113 117 118 119
  124 125 126
  node 0 size: 194969 MB
  node 0 free: 190140 MB
  node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 108 109 110 114 115 116 120 121 122
  123 127 128 129
  node 1 size: 196608 MB
  node 1 free: 192183 MB
  node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 130 131 132 133 137 138 139 143 144
  145 150 151 152
  node 2 size: 196608 MB
  node 2 free: 192221 MB
  node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 134 135 136 140 141 142 146 147 148
  149 153 154 155
  node 3 size: 196608 MB
  node 3 free: 191880 MB
```

(Continued on next page)

Huawei

Huawei CH242 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_base = 454

SPECrate2017_int_peak = 487

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jul-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Platform Notes (Continued)

```
  node 4 cpus: 52 53 54 55 59 60 61 65 66 67 72 73 74 156 157 158 159 163 164 165 169 170
  171 176 177 178
  node 4 size: 196608 MB
  node 4 free: 192214 MB
  node 5 cpus: 56 57 58 62 63 64 68 69 70 71 75 76 77 160 161 162 166 167 168 172 173 174
  175 179 180 181
  node 5 size: 196608 MB
  node 5 free: 192241 MB
  node 6 cpus: 78 79 80 81 85 86 87 91 92 93 98 99 100 182 183 184 185 189 190 191 195
  196 197 202 203 204
  node 6 size: 196608 MB
  node 6 free: 192172 MB
  node 7 cpus: 82 83 84 88 89 90 94 95 96 97 101 102 103 186 187 188 192 193 194 198 199
  200 201 205 206 207
  node 7 size: 196608 MB
  node 7 free: 192163 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  20  20  20  20  20  20  20
    1:  20  10  20  20  20  20  20  20
    2:  20  20  10  20  20  20  20  20
    3:  20  20  20  10  20  20  20  20
    4:  20  20  20  20  10  20  20  20
    5:  20  20  20  20  20  10  20  20
    6:  20  20  20  20  20  20  10  20
    7:  20  20  20  20  20  20  20  10

From /proc/meminfo
   MemTotal:       1583345532 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.3 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.3"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
    Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
    2017 x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Jul 5 01:42

 SPEC is set to: /spec
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   400G   22G  378G   6% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 0.84 03/26/2018
   Memory:
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 502.gcc_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
     541.leela_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`

(Continued on next page)

Peak Portability Flags (Continued)

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-strict-overflow -L/usr/local/je5.0.1-64/lib -ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):
-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):
-m64

523.xalancbmk_r: -m32

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-07-05 01:54:04-0400.
Report generated on 2018-10-31 18:34:43 by CPU2017 PS formatter v6067.
Originally published on 2018-07-27.