SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.20 GHz, AMD EPYC 7301)

SPECrate2017_fp_base = 179

SPECrate2017_fp_peak = 181

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2018
Hardware Availability: Jul-2018
Software Availability: Jul-2018

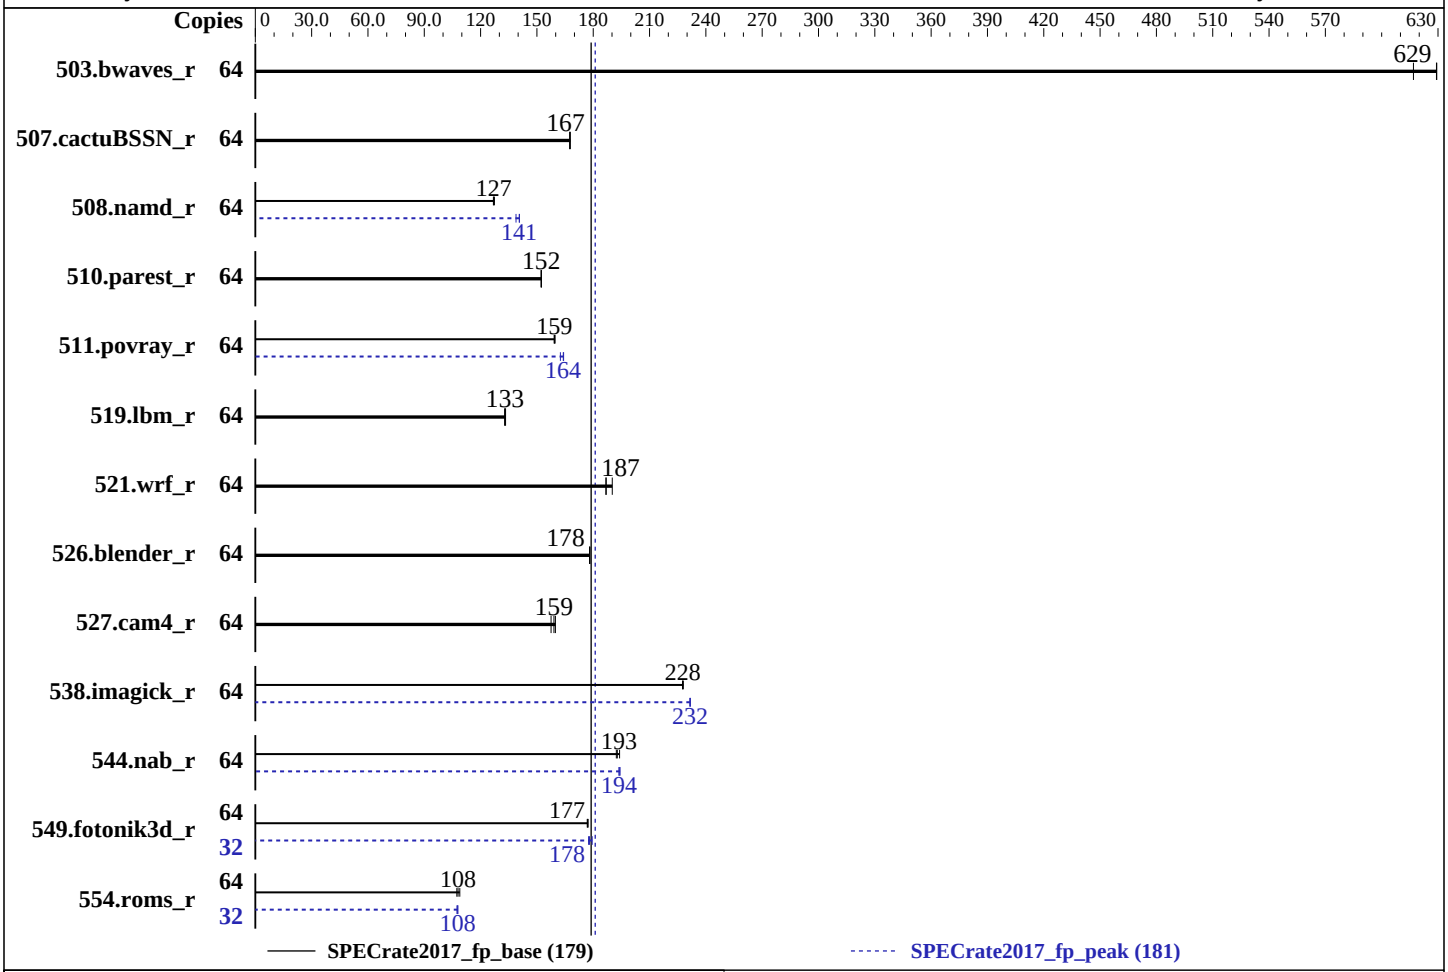

Hardware

CPU Name:	AMD EPYC 7301
Max MHz.:	2700
Nominal:	2200
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	64 MB I+D on chip per chip, 8 MB shared / 2 cores
Other:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)
Storage:	1 x 400 GB SAS SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.140-94.42-default
Compiler:	C/C++: Version 1.0.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	HPE BIOS Version A40 06/07/2018 released Jul-2018
File System:	xfs
System State:	Run level 5 (multi-user, w/GUI)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc general purpose malloc implementation v4.5.0;

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen10
(2.20 GHz, AMD EPYC 7301)

SPECrate2017_fp_base = 179

SPECrate2017_fp_peak = 181

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2018
Hardware Availability: Jul-2018
Software Availability: Jul-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	**1020**	**629**	1040	617	1020	629	64	**1020**	**629**	1040	617	1020	629
507.cactuBSSN_r	64	**484**	**167**	484	167	483	168	64	**484**	**167**	484	167	483	168
508.namd_r	64	479	127	477	127	**479**	**127**	64	**432**	**141**	438	139	432	141
510.parest_r	64	**1099**	**152**	1100	152	1099	152	64	**1099**	**152**	1100	152	1099	152
511.povray_r	64	**938**	**159**	936	160	939	159	64	**911**	**164**	920	163	910	164
519.lbm_r	64	**507**	**133**	508	133	506	133	64	**507**	**133**	508	133	506	133
521.wrf_r	64	**767**	**187**	768	187	754	190	64	**767**	**187**	768	187	754	190
526.blender_r	64	547	178	547	178	**547**	**178**	64	547	178	547	178	**547**	**178**
527.cam4_r	64	**704**	**159**	711	158	700	160	64	**704**	**159**	711	158	700	160
538.imagick_r	64	698	228	**699**	**228**	700	228	64	**687**	**232**	687	232	687	232
544.nab_r	64	560	192	555	194	**559**	**193**	64	556	194	**556**	**194**	554	194
549.fotonik3d_r	64	**1409**	**177**	1407	177	1411	177	32	**700**	**178**	695	179	702	178
554.roms_r	64	**942**	**108**	934	109	947	107	32	472	108	473	107	**472**	**108**

SPECrate2017_fp_base = 179

SPECrate2017_fp_peak = 181

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"
MALLOC_CONF = "lg_chunk:28"

The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.


The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
jemalloc, a general purpose malloc implementation, was obtained at
https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
  narenas: sets the maximum number of arenas to use for automatic multiplexing
           of threads and arenas.
  lg_chunk: set the virtual memory chunk size (log base 2). For example,
            lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.
```

Platform Notes

```
 BIOS Configuration:
  Thermal Configuration set to Maximum Cooling
  Performance Determinism set to Power Deterministic
  Memory Patrol Scrubbing set to Disabled
  Workload Profile set to General Throughput Compute
    Minimum Processor Idle Power Core C-State set to C6 State
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-y31s Tue Jul 31 16:08:18 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : AMD EPYC 7301 16-Core Processor
      2  "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
      physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                64
     On-line CPU(s) list:   0-63
     Thread(s) per core:    2
     Core(s) per socket:    16
     Socket(s):             2
     NUMA node(s):          8
     Vendor ID:             AuthenticAMD
     CPU family:            23
     Model:                 1
     Model name:            AMD EPYC 7301 16-Core Processor
     Stepping:              2
     CPU MHz:               1200.000
     CPU max MHz:           2200.0000
     CPU min MHz:           1200.0000
     BogoMIPS:              4391.76
     Virtualization:        AMD-V
     L1d cache:             32K
     L1i cache:             64K
     L2 cache:              512K
     L3 cache:              8192K
     NUMA node0 CPU(s):     0-3,32-35
     NUMA node1 CPU(s):     4-7,36-39
     NUMA node2 CPU(s):     8-11,40-43
     NUMA node3 CPU(s):     12-15,44-47
     NUMA node4 CPU(s):     16-19,48-51
     NUMA node5 CPU(s):     20-23,52-55
     NUMA node6 CPU(s):     24-27,56-59
     NUMA node7 CPU(s):     28-31,60-63
     Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
```

(Continued on next page)

Platform Notes (Continued)

```
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat
      hw_pstate ssbd ibpb retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
      bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero
      irperf overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 32 33 34 35
   node 0 size: 128704 MB
   node 0 free: 128492 MB
   node 1 cpus: 4 5 6 7 36 37 38 39
   node 1 size: 129022 MB
   node 1 free: 128842 MB
   node 2 cpus: 8 9 10 11 40 41 42 43
   node 2 size: 129022 MB
   node 2 free: 128848 MB
   node 3 cpus: 12 13 14 15 44 45 46 47
   node 3 size: 129022 MB
   node 3 free: 128815 MB
   node 4 cpus: 16 17 18 19 48 49 50 51
   node 4 size: 129022 MB
   node 4 free: 128830 MB
   node 5 cpus: 20 21 22 23 52 53 54 55
   node 5 size: 129022 MB
   node 5 free: 128868 MB
   node 6 cpus: 24 25 26 27 56 57 58 59
   node 6 size: 129022 MB
   node 6 free: 128875 MB
   node 7 cpus: 28 29 30 31 60 61 62 63
   node 7 size: 128868 MB
   node 7 free: 128713 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  16  16  16  32  32  32  32
     1:  16  10  16  16  32  32  32  32
     2:  16  16  10  16  32  32  32  32
     3:  16  16  16  10  32  32  32  32
     4:  32  32  32  32  10  16  16  16
     5:  32  32  32  32  16  10  16  16
     6:  32  32  32  32  16  16  10  16
```

(Continued on next page)

Platform Notes (Continued)

```
     7:  32  32  32  32  16  16  16  10

From /proc/meminfo
   MemTotal:       1056465760 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 3
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux linux-y31s 4.4.140-94.42-default #1 SMP Tue Jul 17 07:44:50 UTC 2018 (0b375e4)
   x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Jul 30 08:00

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   333G  4.9G  328G   2% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE A40 06/07/2018
  Memory:
   16x UNKNOWN NOT AVAILABLE
   16x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
      peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc -lgfortran -lamdlibm

Benchmarks using both Fortran and C:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000
-O3(gfortran) -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc -lgfortran -lamdlibm

Benchmarks using both C and C++:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-fremap-arrays -mno-avx2 -inline-threshold=1000 -finline-aggressive
-z muldefs -ljemalloc

Benchmarks using Fortran, C, and C++:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000
-finline-aggressive -O3(gfortran) -mavx -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc

510.parest_r: basepeak = yes

Fortran benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `-flto -Wl,-plugin-opt= -merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -O3`(gfortran) `-O3`(clang) `-mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="-merge-constant -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm`

554.roms_r: `Same as 549.fotonik3d_r`

Benchmarks using both Fortran and C:

521.wrf_r: `basepeak = yes`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-flto -Wl,-plugin-opt= -merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -finline-aggressive -ljemalloc`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html`
`http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml`
`http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-07-31 16:08:17-0400.
Report generated on 2019-02-21 18:09:28 by CPU2017 PS formatter v6067.
Originally published on 2018-08-21.