



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

CPU2017 License: 001176


Test Date: Aug-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

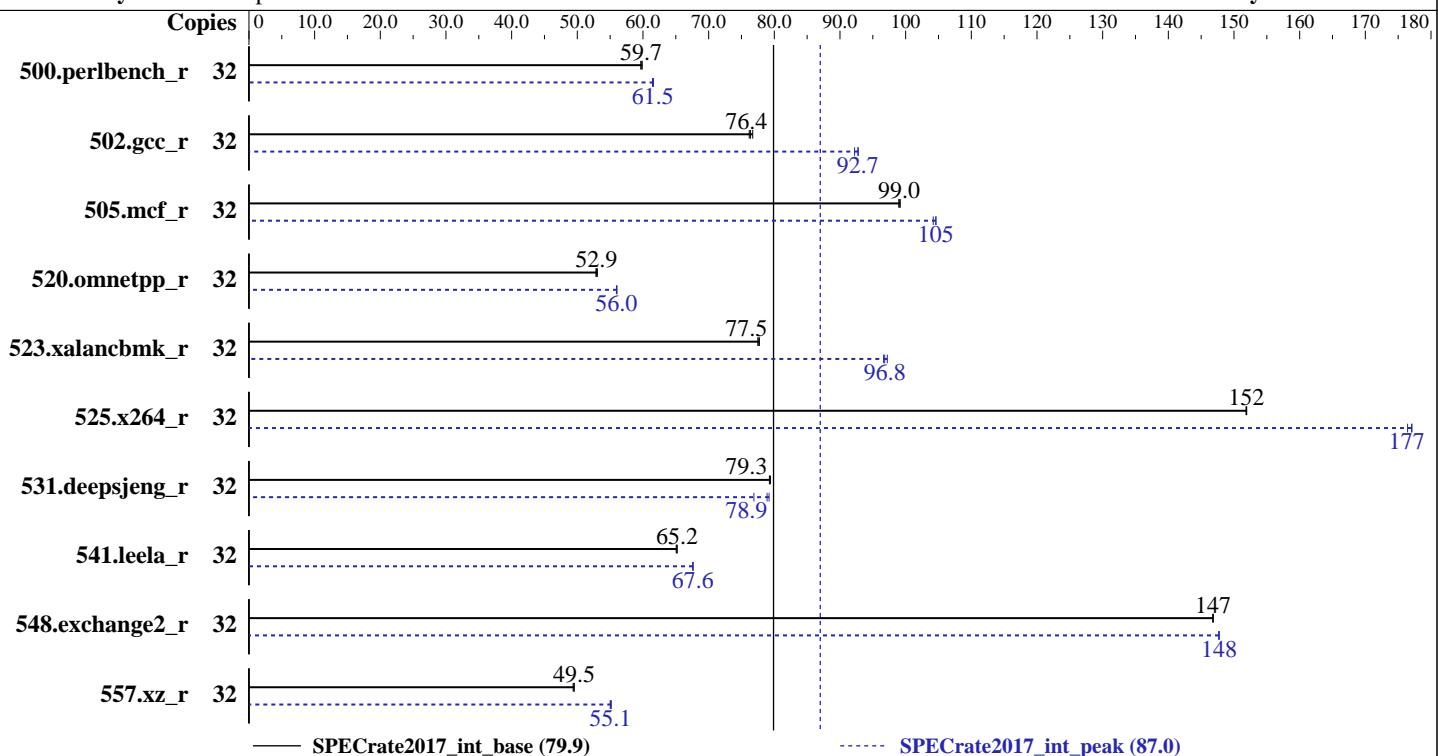

— SPECrate2017_int_base (79.9)

..... SPECrate2017_int_peak (87.0)

Hardware

CPU Name: AMD EPYC 7301
Max MHz.: 2700
Nominal: 2200
Enabled: 16 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores
Other: None
Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2666V-L)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
Compiler: kernel 4.4.114-94.11-default
C/C++: Version 1.0.0 of AOCC
Fortran: Version 4.8.2 of GCC
Parallel: No
Firmware: Supermicro BIOS version 1.0b released Apr-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc general purpose malloc implementation V4.5.0



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

CPU2017 License: 001176

Test Date: Aug-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	853	59.7	854	59.7	851	59.9	32	829	61.5	828	61.5	827	61.6
502.gcc_r	32	593	76.4	595	76.2	591	76.7	32	489	92.7	488	92.8	491	92.2
505.mcf_r	32	523	99.0	521	99.2	522	99.0	32	494	105	496	104	494	105
520.omnetpp_r	32	793	52.9	791	53.1	795	52.8	32	750	56.0	750	56.0	749	56.1
523.xalancbmk_r	32	436	77.5	436	77.5	435	77.7	32	350	96.6	348	97.2	349	96.8
525.x264_r	32	369	152	369	152	369	152	32	318	176	316	177	316	177
531.deepsjeng_r	32	463	79.3	462	79.4	462	79.3	32	463	79.2	477	76.9	465	78.9
541.leela_r	32	813	65.2	813	65.2	815	65.1	32	784	67.6	784	67.6	784	67.6
548.exchange2_r	32	571	147	571	147	571	147	32	568	148	568	148	568	148
557.xz_r	32	698	49.5	698	49.5	700	49.4	32	628	55.0	626	55.2	627	55.1

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

CPU2017 License: 001176

Test Date: Aug-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32;"  
MALLOC_CONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to $2^{21} = 2\text{MiB}$.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Determinism Slider = Power

Sysinfo program /home/cpu2017/bin/sysinfo

```
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-pm02 Fri Aug 3 16:37:23 2018
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7301 16-Core Processor  
1 "physical id"s (chips)  
32 "processors"
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

CPU2017 License: 001176

Test Date: Aug-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
siblings   : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             1
NUMA node(s):          4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7301 16-Core Processor
Stepping:               2
CPU MHz:               2200.000
CPU max MHz:           2200.0000
CPU min MHz:           1200.0000
BogoMIPS:              4399.74
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-3,16-19
NUMA node1 CPU(s):     4-7,20-23
NUMA node2 CPU(s):     8-11,24-27
NUMA node3 CPU(s):     12-15,28-31
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
           pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
           constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpf eagerfpu dni
           pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
           rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
           osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
           hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
           flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
           smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
           ibpb overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

Test Date: Aug-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 16 17 18 19
node 0 size: 128841 MB
node 0 free: 128680 MB
node 1 cpus: 4 5 6 7 20 21 22 23
node 1 size: 129019 MB
node 1 free: 128879 MB
node 2 cpus: 8 9 10 11 24 25 26 27
node 2 size: 129019 MB
node 2 free: 128858 MB
node 3 cpus: 12 13 14 15 28 29 30 31
node 3 size: 129017 MB
node 3 free: 128880 MB
node distances:
node   0   1   2   3
  0: 10 16 16 16
  1: 16 10 16 16
  2: 16 16 10 16
  3: 16 16 16 10
```

From /proc/meminfo

```
MemTotal:      528278516 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-pm02 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

Test Date: Aug-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

Platform Notes (Continued)

run-level 3 Aug 3 16:08

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	145G	3.0G	142G	3%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0b 04/27/2018

Memory:

8x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 502.gcc_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CXXC 523.xalancbmk_r(peak)

=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

=====

CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base) 557.xz_r(base, peak)

=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

Test Date: Aug-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(peak) 525.x264_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 541.leela_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 548.exchange2_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

SPECCrate2017_int_base = 79.9

SPECCrate2017_int_peak = 87.0

CPU2017 License: 001176

Test Date: Aug-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc

Fortran benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8
-fplugin=dragonegg.so -fplugin-arg-dragonegg-l1vm-option=""
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

Test Date: Aug-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lgfortran -lamdlibm

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl, -plugin-opt= -merge-constant
-lsrc-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc

502.gcc_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsrc-in-nested-loop -Ofast -march=znver1

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

CPU2017 License: 001176

Test Date: Aug-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

```
505.mcf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

```
541.leela_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-O3(gfortran) -O3(clang) -maxv2 -madx -funroll-loops -ffast-math
-Ofast -fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1013S-MTR
(H11SSL-i , AMD EPYC 7301)

SPECrate2017_int_base = 79.9

SPECrate2017_int_peak = 87.0

CPU2017 License: 001176

Test Date: Aug-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-08-03 04:37:22-0400.

Report generated on 2019-02-21 18:08:37 by CPU2017 PDF formatter v6067.

Originally published on 2018-08-21.