SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen 10
(2.20 GHz, Intel Xeon Silver 4114)

SPECrate2017_int_base = 92.9

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

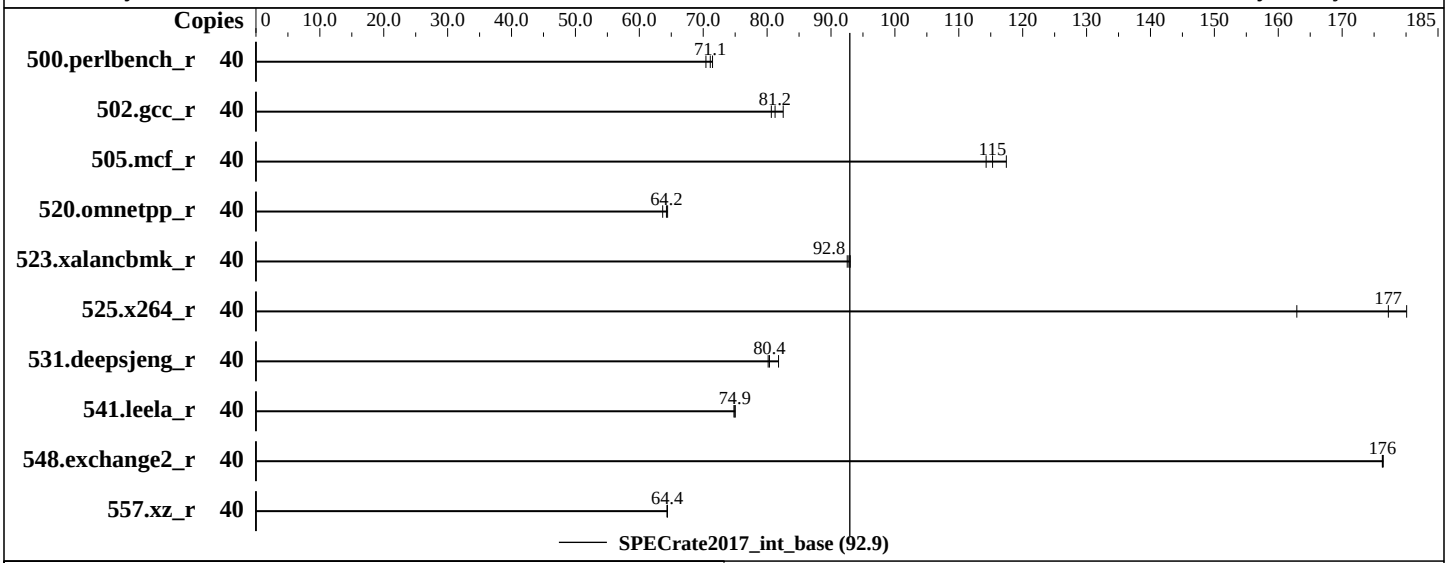

Hardware

CPU Name:	Intel Xeon Silver 4114
Max MHz.:	3000
Nominal:	2200
Enabled:	20 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	13.75 MB I+D on chip per chip
Other:	None
Memory:	192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2400)
Storage:	2 x 480 GB SATA SSD, RAID-0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.131-94.29-default
Compiler:	C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	HPE BIOS Version U41 06/15/2018 released Jun-2018
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc general purpose malloc implementation v5.0.1

SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant ML350 Gen 10
(2.20 GHz, Intel Xeon Silver 4114)

SPECrate2017_int_base = 92.9

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	**896**	**71.1**	891	71.5	904	70.4							
502.gcc_r	40	686	82.5	**697**	**81.2**	702	80.7							
505.mcf_r	40	550	117	**561**	**115**	566	114							
520.omnetpp_r	40	815	64.4	**817**	**64.2**	824	63.7							
523.xalancbmk_r	40	454	93.0	**455**	**92.8**	456	92.5							
525.x264_r	40	389	180	**395**	**177**	430	163							
531.deepsjeng_r	40	560	81.8	**570**	**80.4**	572	80.2							
541.leela_r	40	883	75.0	**884**	**74.9**	885	74.8							
548.exchange2_r	40	**594**	**176**	594	176	594	176							
557.xz_r	40	671	64.4	**671**	**64.4**	671	64.4							

SPECrate2017_int_base = 92.9

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
IRQ balance service was stopped using "service irqbalance stop"
Energy perf-bias set with "cpupower -c all -b 0"
Tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty background ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_background_ratio"
VM Dirty ratio was set to 40 using  "echo 40 > /proc/sys/vm/dirty_ratio"
Swappiness was set to 1 using "echo 1 > /proc/sys/vm/swappiness"
KSM Sleep milliseconds was set to 200 using "echo 200 > /sys/kernel/mm/ksm/sleep_millisecs"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
Zone reclaim mode was set to 1 using "echo 1 > /proc/sys/vm/zone_reclaim_mode"
Transparent Huge Pages enabled by default
Filesystem page cache synced and cleared with:
Prior to runcpu invocation
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/cpu2017/lib/ia32:/cpu2017/lib/intel64:/cpu2017/je5.0.1-32:/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
 BIOS Configuration
   Workload Profile set to General Peak Fequency Compute
   Processor x2APIC Support set to Disabled
   Memory Patrol Scrubbing set to Disabled
   VT set to Disabled
   VT-d set to Disabled
   SR-IOV set to Disabled
   Minimum Processor Idle Power Core C-State set to C1E State
   Energy/Performance Bias set to Maximum Performance
   Thermal Configuration set to Maximum Cooling
 Sysinfo program /cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-hw9v Fri Aug 24 16:23:19 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
       2  "physical id"s (chips)
       40 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 10
       siblings  : 20
       physical 0: cores 0 1 2 3 4 8 9 10 11 12
       physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                40
      On-line CPU(s) list:   0-39
      Thread(s) per core:    2
      Core(s) per socket:    10
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
      Stepping:              4
      CPU MHz:               2194.855
      BogoMIPS:              4389.71
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              14080K
      NUMA node0 CPU(s):     0-9,20-29
      NUMA node1 CPU(s):     10-19,30-39
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl stibp ssbd retpoline kaiser tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

/proc/cpuinfo cache data
   cache size : 14080 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
  node 0 size: 96264 MB
  node 0 free: 95833 MB
  node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
  node 1 size: 96637 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 1 free: 96340 MB
   node distances:
   node   0   1
     0:  10  21
     1:  21  10

 From /proc/meminfo
    MemTotal:       197532192 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP3

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-hw9v 4.4.131-94.29-default #1 SMP Mon May 21 14:41:34 UTC 2018 (f49bc78)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Mitigation: PTI
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

 run-level 3 Aug 23 23:03 last=5

 SPEC is set to: /cpu2017
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sdb3      btrfs  443G   34G  409G   8% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
```

(Continued on next page)

Platform Notes (Continued)

```
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE U41 06/15/2018
  Memory:
   24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed,
memory is 192 GB and the dmidecode description should have one line reading as:
24x HPE 815097-B21 8 GB 2 rank 2666, configured at 2400
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
     557.xz_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
     541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

(Continued on next page)

Base Other Flags (Continued)

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revJ.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revJ.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-08-24 17:23:18-0400.
Report generated on 2018-10-31 18:37:49 by CPU2017 PS formatter v6067.
Originally published on 2018-09-18.