SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C125 (AMD EPYC 7261,

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 110

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Sep-2018
Hardware Availability: Jul-2018
Software Availability: Aug-2018

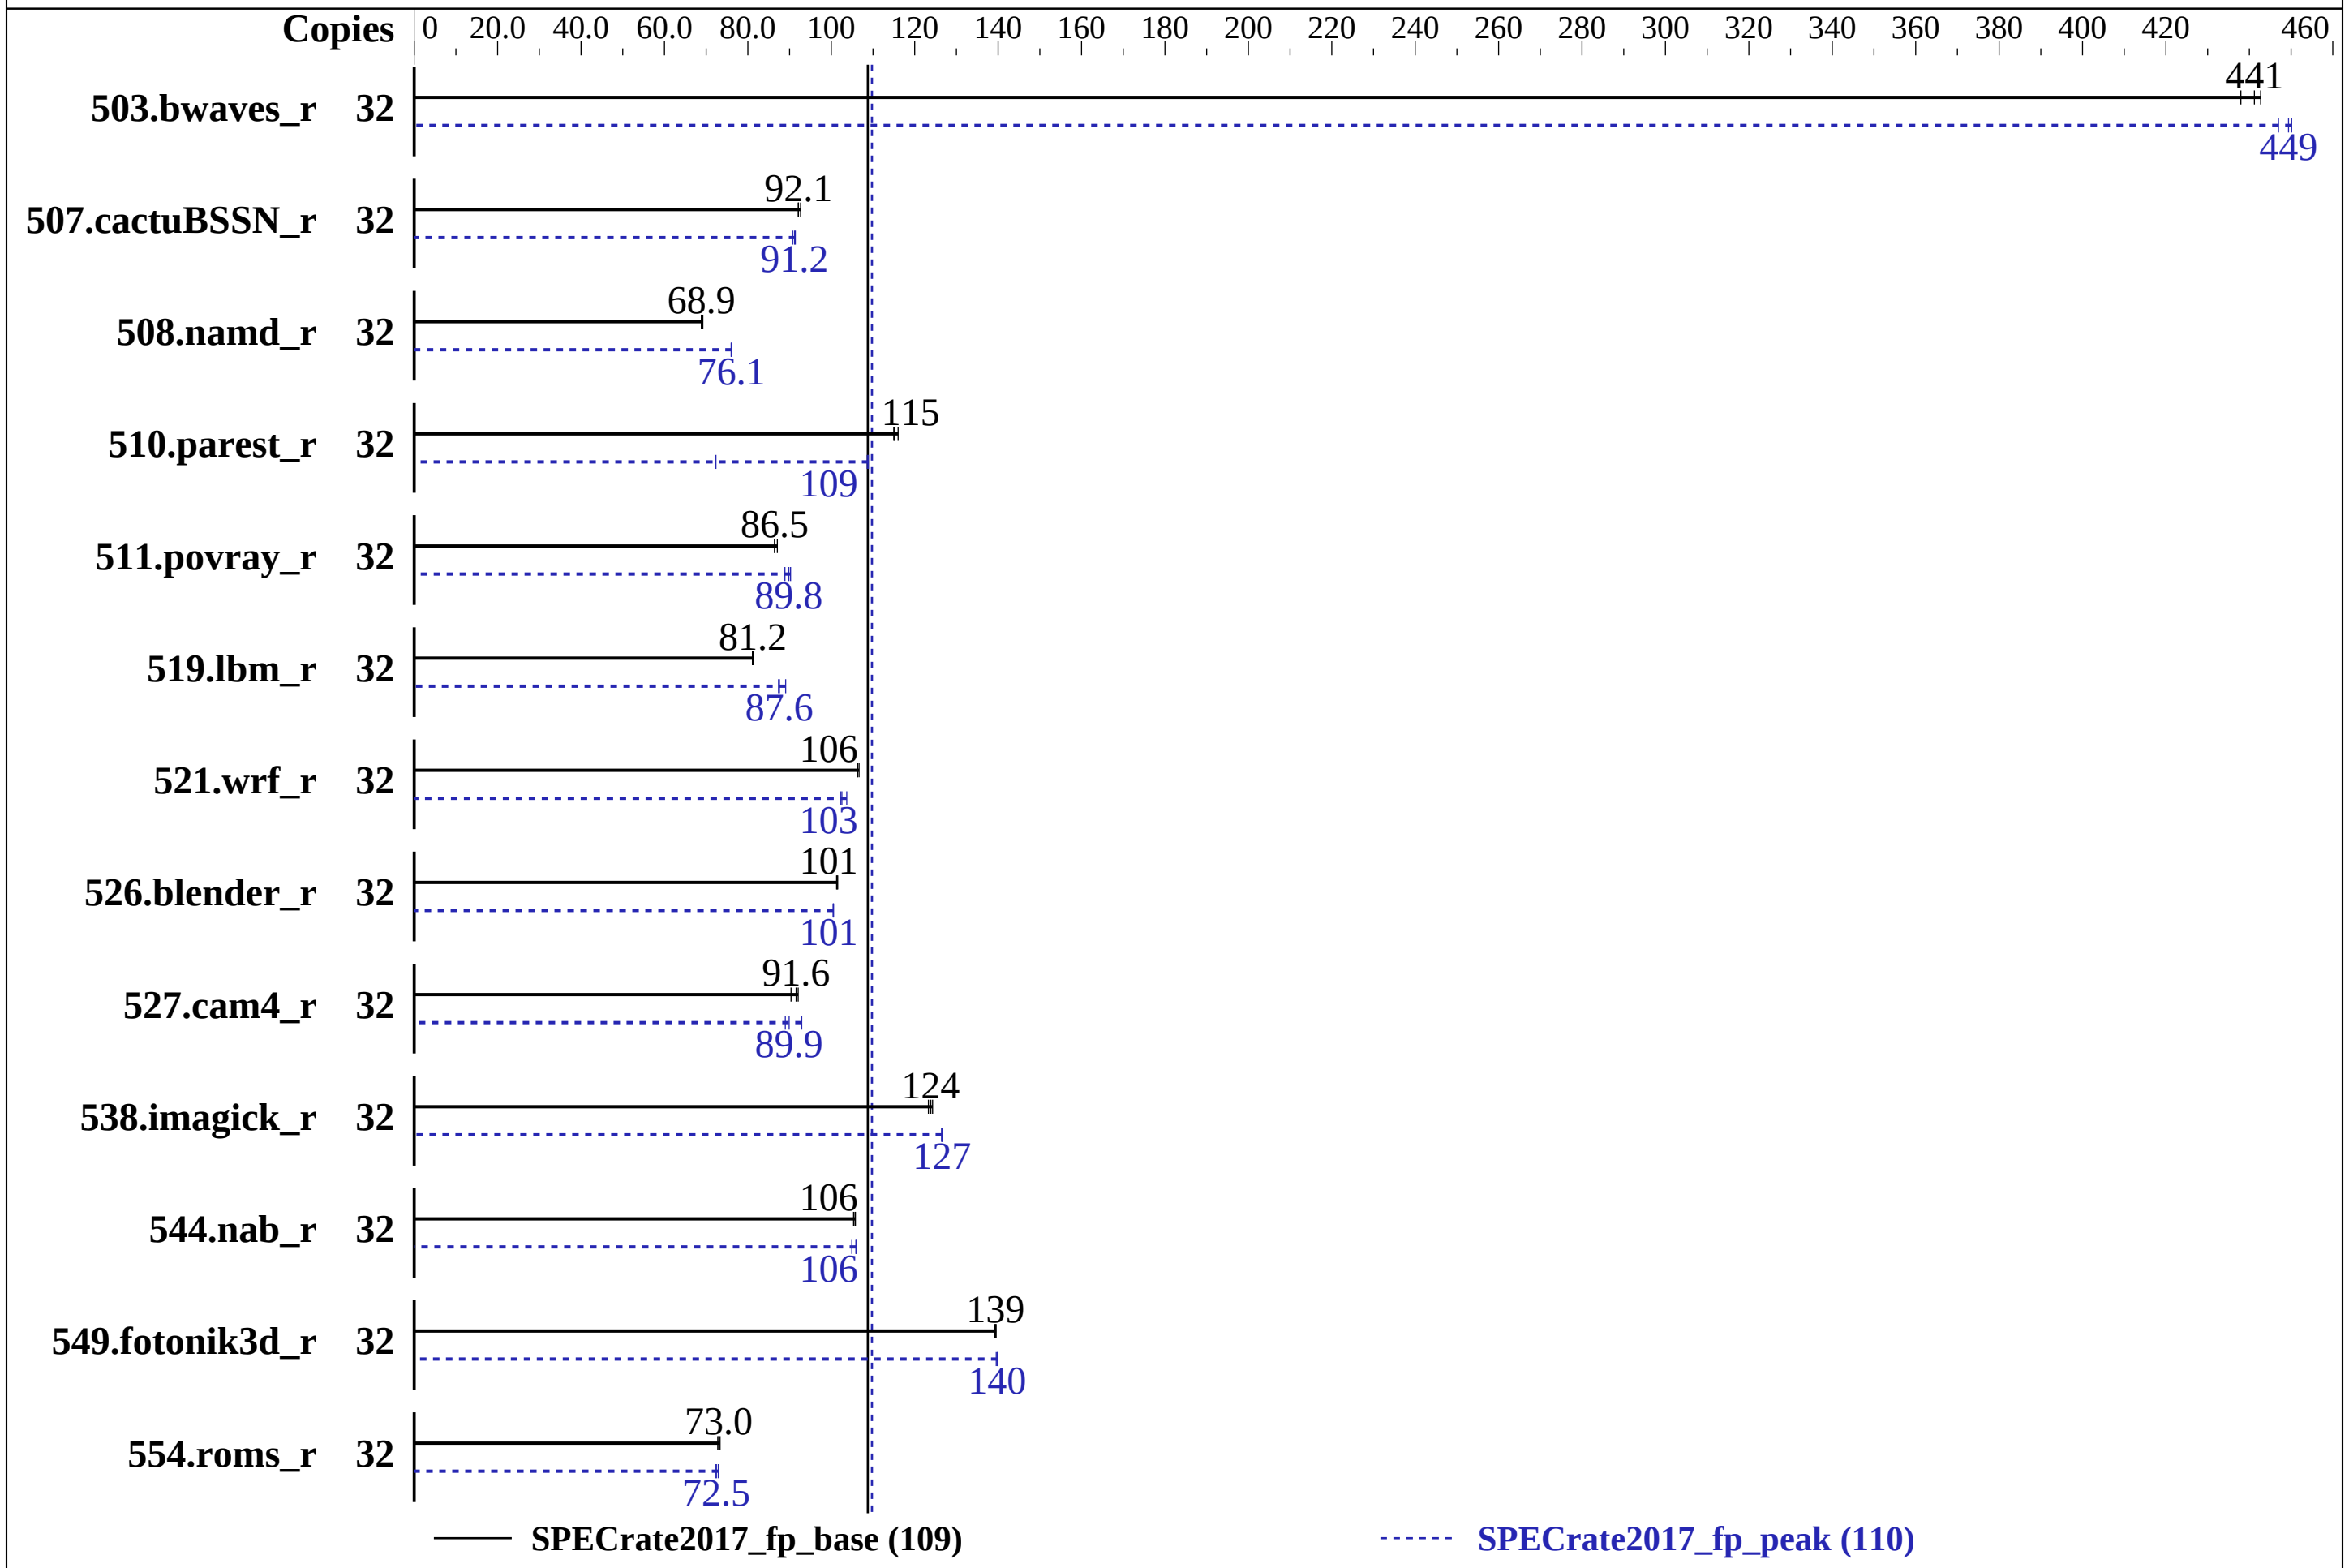

Hardware

CPU Name:	AMD EPYC 7261
Max MHz.:	2900
Nominal:	2500
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1,2 chip
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	64 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2667V-R, running at 2400)
Storage:	600 GB SAS HDD, 15K RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 x86_64 kernel 4.4.143-94.47-default
Compiler:	C/C++: Version 1.0.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	Cisco Systems, Inc. BIOS Version C125.4.0.0.15.0504180159 released May-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc general purpose malloc implementation v4.5.0

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C125 (AMD EPYC 7261,

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 110

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems
Test Date: Sep-2018
Hardware Availability: Jul-2018
Software Availability: Aug-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	**727**	**441**	733	438	725	443	32	718	447	**714**	**449**	713	450
507.cactuBSSN_r	32	437	92.6	**440**	**92.1**	440	92.1	32	**444**	**91.2**	446	90.7	443	91.4
508.namd_r	32	439	69.2	**441**	**68.9**	441	68.9	32	**400**	**76.1**	399	76.1	400	76.0
510.parest_r	32	722	116	728	115	**727**	**115**	32	1157	72.3	**771**	**109**	769	109
511.povray_r	32	858	87.1	**864**	**86.5**	865	86.4	32	828	90.2	**832**	**89.8**	841	88.9
519.lbm_r	32	415	81.4	416	81.1	**415**	**81.2**	32	379	89.1	**385**	**87.6**	386	87.4
521.wrf_r	32	672	107	**674**	**106**	675	106	32	**699**	**103**	691	104	701	102
526.blender_r	32	**481**	**101**	480	102	481	101	32	485	101	**485**	**101**	485	100
527.cam4_r	32	**611**	**91.6**	619	90.4	608	92.1	32	602	92.9	629	89.0	**623**	**89.9**
538.imagick_r	32	**642**	**124**	640	124	646	123	32	**629**	**127**	629	126	629	127
544.nab_r	32	511	105	509	106	**510**	**106**	32	508	106	513	105	**508**	**106**
549.fotonik3d_r	32	**895**	**139**	894	140	896	139	32	894	140	**892**	**140**	892	140
554.roms_r	32	693	73.3	699	72.8	**696**	**73.0**	32	703	72.4	697	72.9	**702**	**72.5**

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2017/amd1704-rate-libs-revC/64;/opt/cpu2017/amd1704-rate-libs-revC/32:"
MALLOC_CONF = "lg_chunk:28"

The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
  narenas: sets the maximum number of arenas to use for automatic multiplexing
           of threads and arenas.
  lg_chunk: set the virtual memory chunk size (log base 2). For example,
            lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Performance Determinism set to Power Deterministic
 Sysinfo program /opt/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-7bdx Mon Oct 15 09:15:29 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7261 8-Core Processor
       2  "physical id"s (chips)
       32 "processors"
```

(Continued on next page)

Platform Notes (Continued)

```
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 0 4 8 12 16 20 24 28
       physical 1: cores 0 4 8 12 16 20 24 28

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                32
      On-line CPU(s) list:   0-31
      Thread(s) per core:    2
      Core(s) per socket:    8
      Socket(s):             2
      NUMA node(s):          8
      Vendor ID:             AuthenticAMD
      CPU family:            23
      Model:                 1
      Model name:            AMD EPYC 7261 8-Core Processor
      Stepping:              2
      CPU MHz:               2500.000
      CPU max MHz:           2500.0000
      CPU min MHz:           1200.0000
      BogoMIPS:              4990.52
      Virtualization:        AMD-V
      L1d cache:             32K
      L1i cache:             64K
      L2 cache:              512K
      L3 cache:              8192K
      NUMA node0 CPU(s):     0,1,16,17
      NUMA node1 CPU(s):     2,3,18,19
      NUMA node2 CPU(s):     4,5,20,21
      NUMA node3 CPU(s):     6,7,22,23
      NUMA node4 CPU(s):     8,9,24,25
      NUMA node5 CPU(s):     10,11,26,27
      NUMA node6 CPU(s):     12,13,28,29
      NUMA node7 CPU(s):     14,15,30,31
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat
      hw_pstate ssbd ibpb retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
```

(Continued on next page)

Platform Notes (Continued)

```
      bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero
      irperf overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 16 17
   node 0 size: 128831 MB
   node 0 free: 128643 MB
   node 1 cpus: 2 3 18 19
   node 1 size: 129020 MB
   node 1 free: 128910 MB
   node 2 cpus: 4 5 20 21
   node 2 size: 129020 MB
   node 2 free: 128884 MB
   node 3 cpus: 6 7 22 23
   node 3 size: 129020 MB
   node 3 free: 128915 MB
   node 4 cpus: 8 9 24 25
   node 4 size: 129020 MB
   node 4 free: 128892 MB
   node 5 cpus: 10 11 26 27
   node 5 size: 129020 MB
   node 5 free: 128916 MB
   node 6 cpus: 12 13 28 29
   node 6 size: 129020 MB
   node 6 free: 128924 MB
   node 7 cpus: 14 15 30 31
   node 7 size: 116923 MB
   node 7 free: 116828 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  16  16  16  32  32  32  32
     1:  16  10  16  16  32  32  32  32
     2:  16  16  10  16  32  32  32  32
     3:  16  16  16  10  32  32  32  32
     4:  32  32  32  32  10  16  16  16
     5:  32  32  32  32  16  10  16  16
     6:  32  32  32  32  16  16  10  16
     7:  32  32  32  32  16  16  16  10

 From /proc/meminfo
    MemTotal:       1044358108 kB
    HugePages_Total:       0
```

(Continued on next page)

Platform Notes (Continued)

```
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 3
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux linux-7bdx 4.4.143-94.47-default #1 SMP Thu Aug 9 12:47:15 UTC 2018 (6bff971)
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 31 16:02

SPEC is set to: /opt/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   450G   20G  431G   5% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Cisco Systems, Inc. C125.4.0.0.15.0504180159 05/04/2018
  Memory:
   16x 0xCE00 M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
      peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang gfortran`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64`
526.blender_r: `-funsigned-char -D__BOOL_DEFINED -DSPEC_LP64`
527.cam4_r: `-DSPEC_CASE_FLAG -DSPEC_LP64`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:
```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc
```

Fortran benchmarks:
```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -mavx -madx -funroll-loops -ffast-math
-z muldefs -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran  -lamdlibm
```

(Continued on next page)

Copyright 2017-2018 Standard Performance Evaluation Corporation

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm

Benchmarks using both C and C++:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc

Benchmarks using Fortran, C, and C++:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -mavx -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

Copyright 2017-2018 Standard Performance Evaluation Corporation

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -ljemalloc

C++ benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -ljemalloc

Fortran benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm

Benchmarks using both Fortran and C:

521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -O3 -mavx -ffast-math -funroll-loops -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm

527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -O3 -mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm

Benchmarks using both C and C++:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -finline-aggressive -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-V1-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-V1-revA.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-10-15 12:15:28-0400.
Report generated on 2018-11-13 15:10:31 by CPU2017 PS formatter v6067.
Originally published on 2018-11-13.