SPEC® CPU2017 Floating Point Speed Result

Fujitsu

PRIMERGY TX1330 M4, Intel Pentium Gold G5400, 3.70GHz

SPECspeed2017_fp_base = 13.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19		**Test Date:**	Nov-2018
Test Sponsor:	Fujitsu	**Hardware Availability:**	Nov-2018
Tested by:	Fujitsu	**Software Availability:**	Sep-2018

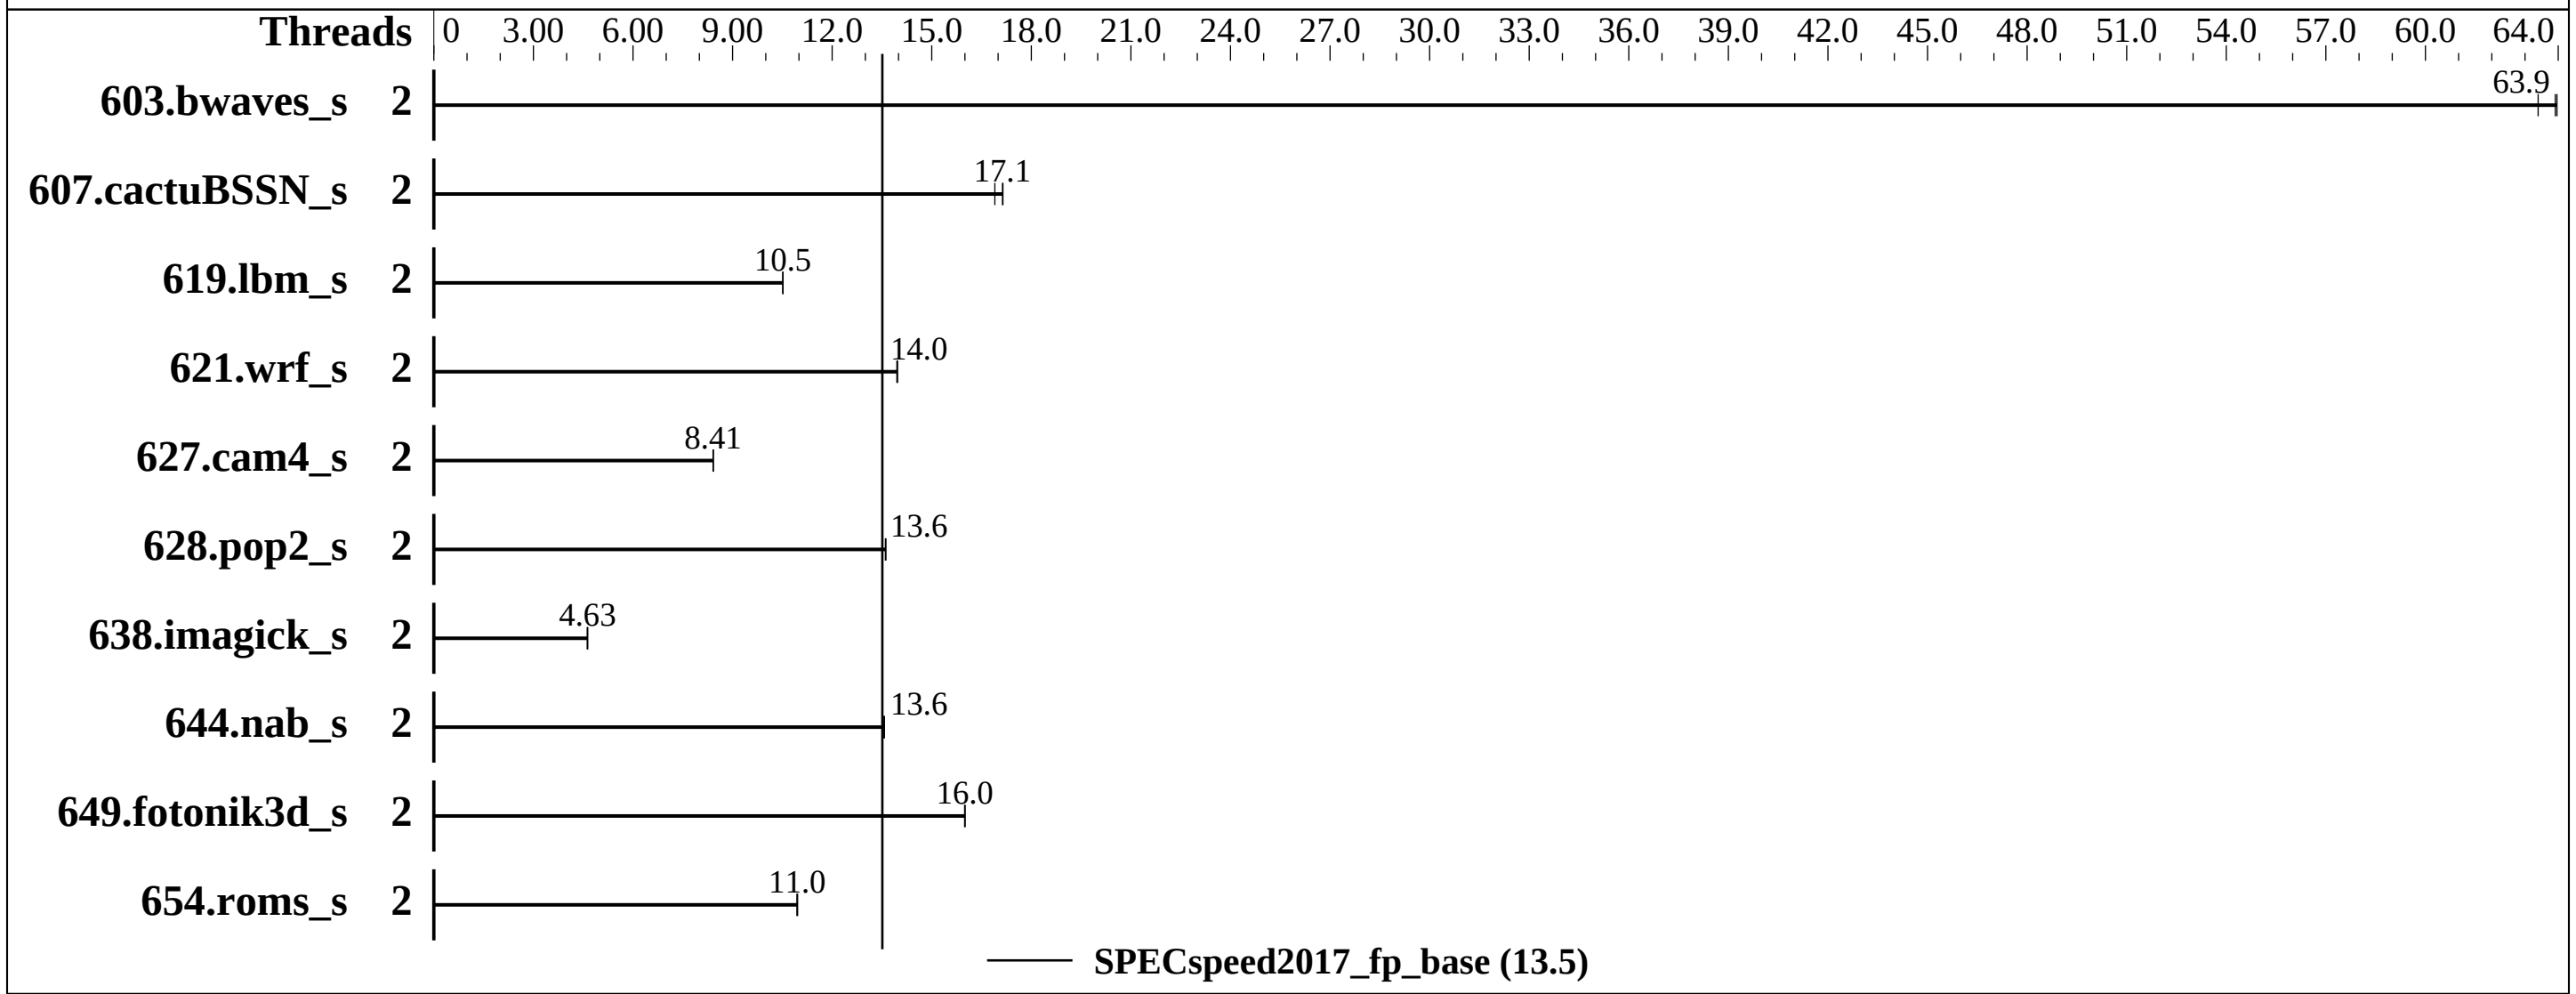

Hardware

CPU Name:	Intel Pentium Gold G5400
Max MHz.:	3700
Nominal:	3700
Enabled:	2 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	4 MB I+D on chip per chip
Other:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)
Storage:	1 x SATA M.2 SSD, 240 GB
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.5 (Maipo) 3.10.0-862.el7.x86_64
Compiler:	C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Fujitsu BIOS Version V5.0.0.13 R1.4.0 for D3673-A1x. Released Nov-2018 tested as V5.0.0.13 R1.0.0 for D3673-A1x Sep-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Floating Point Speed Result

Fujitsu

PRIMERGY TX1330 M4, Intel Pentium Gold G5400, 3.70GHz

SPECspeed2017_fp_base = 13.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	2	931	63.4	**923**	**63.9**	922	64.0							
607.cactuBSSN_s	2	**973**	**17.1**	986	16.9	972	17.1							
619.lbm_s	2	498	10.5	498	10.5	**498**	**10.5**							
621.wrf_s	2	**947**	**14.0**	947	14.0	948	13.9							
627.cam4_s	2	**1053**	**8.41**	1054	8.41	1053	8.42							
628.pop2_s	2	872	13.6	873	13.6	**872**	**13.6**							
638.imagick_s	2	3121	4.62	3114	4.63	**3114**	**4.63**							
644.nab_s	2	**1288**	**13.6**	1288	13.6	1287	13.6							
649.fotonik3d_s	2	570	16.0	**570**	**16.0**	570	16.0							
654.roms_s	2	1437	11.0	**1438**	**11.0**	1439	10.9							

SPECspeed2017_fp_base = 13.5

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
OMP_STACKSIZE = "192M"
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-ic19/ic19.0-lib/intel64"

 Binaries compiled on a system with 1x Intel Xeon E-2186G CPU + 64GB RAM
 memory using Red Hat Enterprise Linux Server release 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3 > /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
```

Platform Notes

```
 Sysinfo program /home/Benchmark/speccpu2017-ic19/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on localhost.localdomain Fri Nov  9 19:29:49 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Pentium(R) Gold G5400 CPU @ 3.70GHz
       1  "physical id"s (chips)
       4 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 2
       siblings  : 4
       physical 0: cores 0 1

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                4
      On-line CPU(s) list:   0-3
      Thread(s) per core:    2
      Core(s) per socket:    2
      Socket(s):             1
      NUMA node(s):          1
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 158
      Model name:            Intel(R) Pentium(R) Gold G5400 CPU @ 3.70GHz
      Stepping:              11
      CPU MHz:               3700.000
      CPU max MHz:           3700.0000
      CPU min MHz:           800.0000
      BogoMIPS:              7392.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              256K
      L3 cache:              4096K
```

(Continued on next page)

Platform Notes (Continued)

```
       NUMA node0 CPU(s):     0-3
       Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
       aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16
       xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
       lahf_lm abm 3dnowprefetch epb intel_pt tpr_shadow vnmi flexpriority ept vpid
       fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap clflushopt xsaveopt xsavec
       xgetbv1 ibpb ibrs stibp dtherm arat pln pts hwp hwp_notify hwp_act_window hwp_epp
       spec_ctrl intel_stibp

 /proc/cpuinfo cache data
    cache size : 4096 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3
   node 0 size: 65278 MB
   node 0 free: 63243 MB
   node distances:
   node   0
     0:  10

 From /proc/meminfo
    MemTotal:       65546112 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux Server"
       VERSION="7.5 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VARIANT="Server"
       VARIANT_ID="server"
       VERSION_ID="7.5"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
    redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server

 uname -a:
    Linux localhost.localdomain 3.10.0-862.el7.x86_64 #1 SMP Wed Mar 21 18:14:51 EDT 2018
    x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)

Platform Notes (Continued)

```
 run-level 3 Nov 9 19:25

 SPEC is set to: /home/Benchmark/speccpu2017-ic19
    Filesystem             Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   150G   67G   84G  45% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS FUJITSU // American Megatrends Inc. V5.0.0.13 R1.0.0 for D3673-A1x
       09/14/2018
   Memory:
    4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667, configured at 2400

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP`

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-DSPEC_OPENMP -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Benchmarks using Fortran, C, and C++:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-11-09 05:29:48-0500.
Report generated on 2018-11-27 13:40:33 by CPU2017 PS formatter v6067.
Originally published on 2018-11-27.