SPEC® CPU2017 Floating Point Rate Result

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6150 2.70 GHz)

SPECrate2017_fp_base = 202

SPECrate2017_fp_peak = Not Run

CPU2017 License:	9019	**Test Date:**	Nov-2018
Test Sponsor:	Cisco Systems	**Hardware Availability:**	Aug-2017
Tested by:	Cisco Systems	**Software Availability:**	Oct-2018

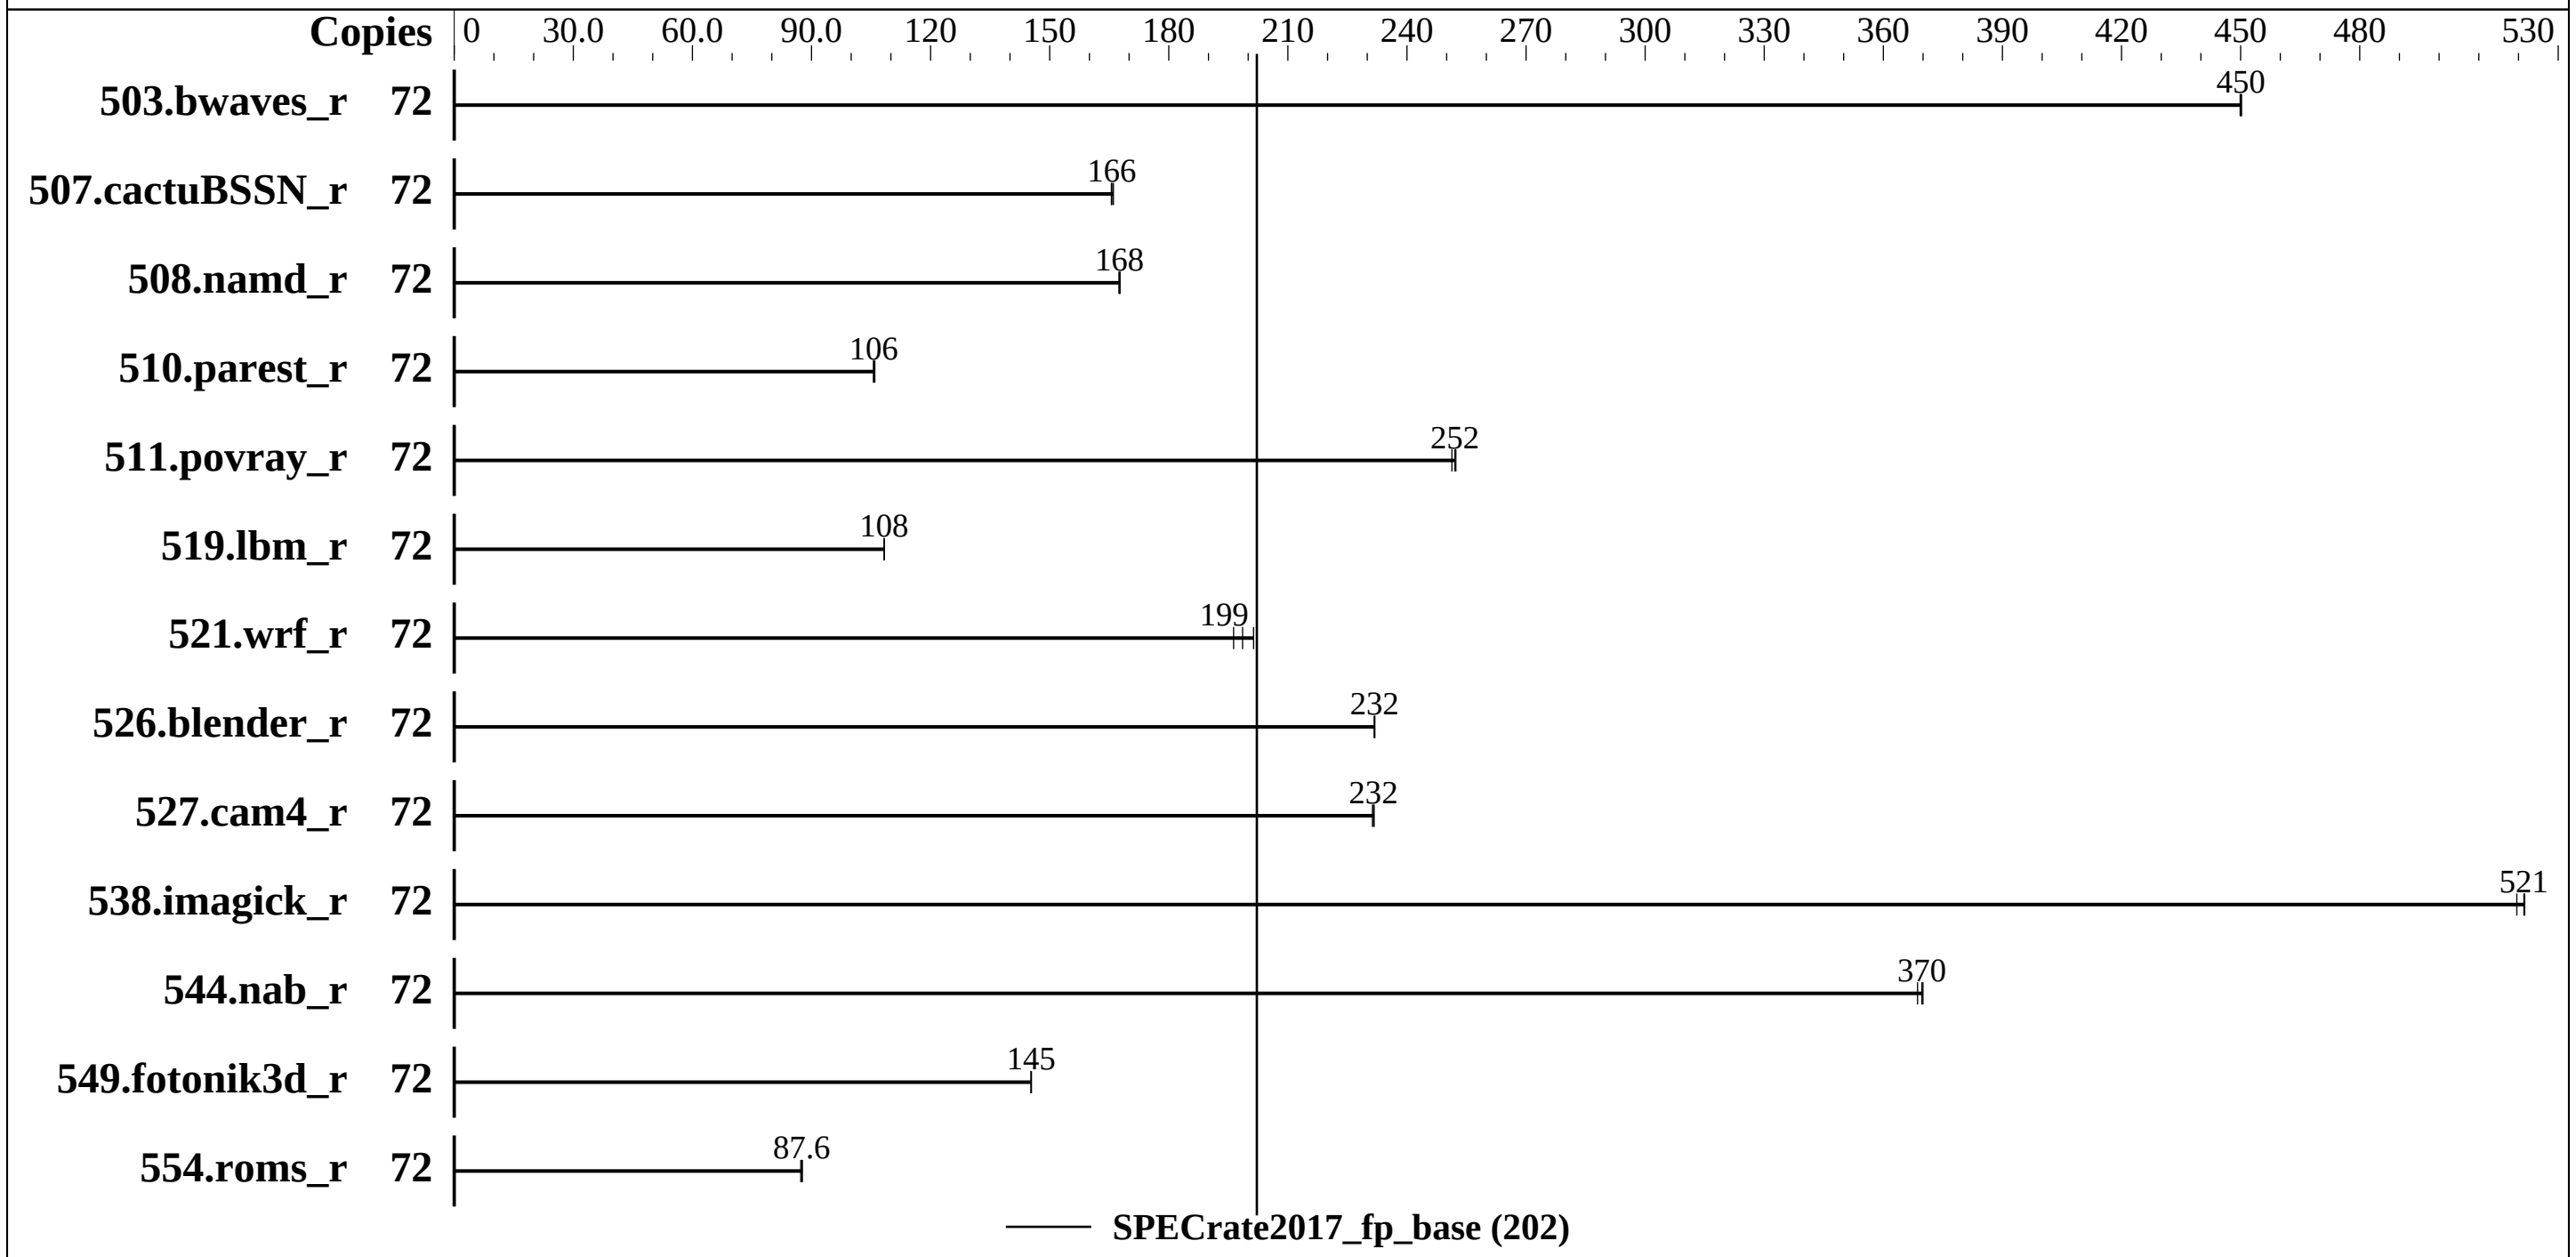

Hardware

CPU Name:	Intel Xeon Gold 6150
Max MHz.:	3700
Nominal:	2700
Enabled:	36 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	24.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 600 GB SAS HDD,15K RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.120-92.70-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 4.0.1 released Oct-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Floating Point Rate Result

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6150 2.70 GHz)

SPECrate2017_fp_base = 202

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems
Test Date: Nov-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	**1604**	**450**	1604	450	1605	450							
507.cactuBSSN_r	72	549	166	**550**	**166**	551	166							
508.namd_r	72	408	168	408	167	**408**	**168**							
510.parest_r	72	1778	106	**1782**	**106**	1783	106							
511.povray_r	72	669	251	**667**	**252**	666	252							
519.lbm_r	72	**700**	**108**	701	108	700	108							
521.wrf_r	72	801	201	**812**	**199**	821	196							
526.blender_r	72	473	232	**473**	**232**	473	232							
527.cam4_r	72	544	231	543	232	**544**	**232**							
538.imagick_r	72	**343**	**521**	345	520	343	522							
544.nab_r	72	328	370	329	369	**328**	**370**							
549.fotonik3d_r	72	**1930**	**145**	1930	145	1931	145							
554.roms_r	72	**1307**	**87.6**	1305	87.7	1311	87.3							

SPECrate2017_fp_base = 202

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
Power Performance Tuning set to OS Controls
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-fdny Tue Dec  4 00:10:29 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz
       2  "physical id"s (chips)
       72 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 18
       siblings  : 36
       physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                72
      On-line CPU(s) list:   0-71
      Thread(s) per core:    2
      Core(s) per socket:    18
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
```

(Continued on next page)

Cisco Systems
Cisco UCS C240 M5 (Intel Xeon Gold 6150 2.70 GHz)

SPECrate2017_fp_base = 202
SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems
Test Date: Nov-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

```
     Model name:              Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz
     Stepping:                4
     CPU MHz:                 2109.301
     CPU max MHz:             3700.0000
     CPU min MHz:             1200.0000
     BogoMIPS:                5387.32
     Virtualization:          VT-x
     L1d cache:               32K
     L1i cache:               32K
     L2 cache:                1024K
     L3 cache:                25344K
     NUMA node0 CPU(s):       0-2,5,6,9,10,14,15,36-38,41,42,45,46,50,51
     NUMA node1 CPU(s):       3,4,7,8,11-13,16,17,39,40,43,44,47-49,52,53
     NUMA node2 CPU(s):       18-20,23,24,27,28,32,33,54-56,59,60,63,64,68,69
     NUMA node3 CPU(s):       21,22,25,26,29-31,34,35,57,58,61,62,65-67,70,71
     Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
     aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
     fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
     xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
     dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
     retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
     avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
     clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

 /proc/cpuinfo cache data
    cache size : 25344 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 5 6 9 10 14 15 36 37 38 41 42 45 46 50 51
   node 0 size: 192097 MB
   node 0 free: 191801 MB
   node 1 cpus: 3 4 7 8 11 12 13 16 17 39 40 43 44 47 48 49 52 53
   node 1 size: 193528 MB
   node 1 free: 193291 MB
   node 2 cpus: 18 19 20 23 24 27 28 32 33 54 55 56 59 60 63 64 68 69
   node 2 size: 193528 MB
   node 2 free: 193297 MB
   node 3 cpus: 21 22 25 26 29 30 31 34 35 57 58 61 62 65 66 67 70 71
   node 3 size: 193525 MB
   node 3 free: 193183 MB
   node distances:
   node   0   1   2   3
     0:  10  11  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
     1:  11  10  21  21
     2:  21  21  10  11
     3:  21  21  11  10

 From /proc/meminfo
    MemTotal:       791224932 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-fdny 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Dec 3 23:08

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      xfs   500G  162G  339G  33% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Cisco Systems, Inc. C240M5.4.0.1.139.1003182220 10/03/2018
   Memory:
    24x 0xCE00 M393A4K40CB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.1.144 20181018
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-12-04 03:10:28-0500.
Report generated on 2018-12-26 13:07:32 by CPU2017 PS formatter v6067.
Originally published on 2018-12-25.