SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Gold 5120, 2.20GHz)

SPECrate2017_int_base = 264

SPECrate2017_int_peak = 278

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2018
Hardware Availability: May-2018
Software Availability: Feb-2018

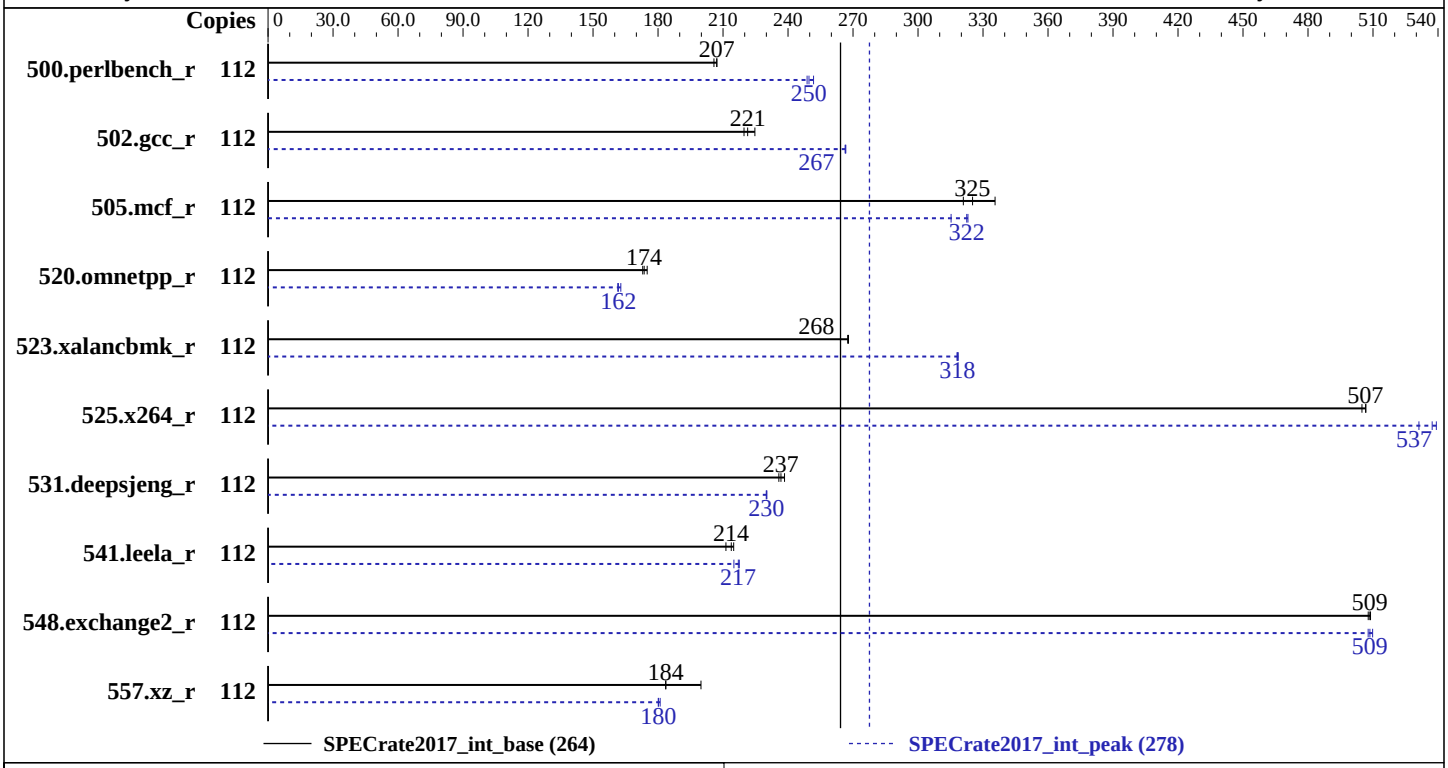

Hardware

CPU Name:	Intel Xeon Gold 5120
Max MHz.:	3200
Nominal:	2200
Enabled:	56 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	19.25 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 4.4.114-94.11-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 1.0.0 released Mar-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator library, version 5.0.1

SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Gold 5120, 2.20GHz)

SPECrate2017_int_base = 264

SPECrate2017_int_peak = 278

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2018
Hardware Availability: May-2018
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	861	207	**861**	**207**	866	206	112	708	252	**714**	**250**	717	249
502.gcc_r	112	**716**	**221**	722	220	706	225	112	595	266	**595**	**267**	595	267
505.mcf_r	112	539	336	**557**	**325**	564	321	112	574	315	**561**	**322**	560	323
520.omnetpp_r	112	850	173	**846**	**174**	840	175	112	902	163	**909**	**162**	910	161
523.xalancbmk_r	112	441	268	442	268	**442**	**268**	112	371	319	**372**	**318**	372	318
525.x264_r	112	387	507	388	505	**387**	**507**	112	**365**	**537**	369	531	364	539
531.deepsjeng_r	112	538	238	**542**	**237**	544	236	112	558	230	**558**	**230**	558	230
541.leela_r	112	863	215	878	211	**867**	**214**	112	863	215	**854**	**217**	853	218
548.exchange2_r	112	**577**	**509**	577	509	578	508	112	576	510	578	508	**577**	**509**
557.xz_r	112	605	200	**659**	**184**	659	184	112	**671**	**180**	672	180	668	181

SPECrate2017_int_base = 264

SPECrate2017_int_peak = 278

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre
variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre
variant 2) is mitigated in the system as tested and documented.
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
 jemalloc: sources available via jemalloc.net
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

Dell PowerEdge R840 and PowerEdge R940xa are electronically equivalent.
This result was measured on Dell PowerEdge R840.
```

Platform Notes

```
 BIOS settings:
 Sub NUMA Cluster enabled
 Virtualization Technology disabled
 System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to Autonomous
 C1E disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub disabled
 Logical Processor enabled
 CPU Interconnect Bus Link Power Management disabled
 PCI ASPM L1 Link Power Management disabled
 Sysinfo program /root/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-p0hc Wed May  2 13:26:20 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
       4  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 14
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

 From lscpu:
      Architecture:          x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                112
      On-line CPU(s) list:   0-111
      Thread(s) per core:    2
      Core(s) per socket:    14
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
      Stepping:              4
      CPU MHz:               2194.864
      BogoMIPS:              4389.72
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              19712K
      NUMA node0 CPU(s):     0,8,16,24,32,40,48,56,64,72,80,88,96,104
      NUMA node1 CPU(s):     1,9,17,25,33,41,49,57,65,73,81,89,97,105
      NUMA node2 CPU(s):     2,10,18,26,34,42,50,58,66,74,82,90,98,106
      NUMA node3 CPU(s):     3,11,19,27,35,43,51,59,67,75,83,91,99,107
      NUMA node4 CPU(s):     4,12,20,28,36,44,52,60,68,76,84,92,100,108
      NUMA node5 CPU(s):     5,13,21,29,37,45,53,61,69,77,85,93,101,109
      NUMA node6 CPU(s):     6,14,22,30,38,46,54,62,70,78,86,94,102,110
      NUMA node7 CPU(s):     7,15,23,31,39,47,55,63,71,79,87,95,103,111
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
      avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
      xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

  /proc/cpuinfo cache data
     cache size : 19712 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104
    node 0 size: 95360 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 free: 95156 MB
   node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105
   node 1 size: 96762 MB
   node 1 free: 96608 MB
   node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106
   node 2 size: 96762 MB
   node 2 free: 96570 MB
   node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107
   node 3 size: 96762 MB
   node 3 free: 96601 MB
   node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108
   node 4 size: 96762 MB
   node 4 free: 96605 MB
   node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109
   node 5 size: 96762 MB
   node 5 free: 96584 MB
   node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110
   node 6 size: 96762 MB
   node 6 free: 96605 MB
   node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111
   node 7 size: 96759 MB
   node 7 free: 96600 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  21  31  21  11  21  31  21
     1:  21  10  21  31  21  11  21  31
     2:  31  21  10  21  31  21  11  21
     3:  21  31  21  10  21  31  21  11
     4:  11  21  31  21  10  21  31  21
     5:  21  11  21  31  21  10  21  31
     6:  31  21  11  21  31  21  10  21
     7:  21  31  21  11  21  31  21  10

  From /proc/meminfo
     MemTotal:       791239228 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP3

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 3
        # This file is deprecated and will be removed in a future service pack or release.
```


(Continued on next page)

Platform Notes (Continued)

```
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-p0hc 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 May 2 13:24

 SPEC is set to: /root/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      xfs   445G   41G  405G  10% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Dell Inc. 1.0.0 03/20/2018
   Memory:
    8x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666, configured at 2400
    15x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666, configured at 2400
    19x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666, configured at 2400
    6x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2400

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 502.gcc_r(peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Peak Compiler Invocation

C benchmarks:
`icc`

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

557.xz_r: `Same as 505.mcf_r`

C++ benchmarks:

520.omnetpp_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

523.xalancbmk_r: `-L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32 -Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

531.deepsjeng_r: `Same as 520.omnetpp_r`

541.leela_r: `Same as 520.omnetpp_r`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

Peak Other Flags

C benchmarks (except as noted below):
`-m64 -std=c11`

502.gcc_r: `-m32 -std=c11`

C++ benchmarks (except as noted below):
`-m64`

523.xalancbmk_r: `-m32`

Fortran benchmarks:
`-m64`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-02 01:26:19-0400.
Report generated on 2019-02-19 13:51:32 by CPU2017 PS formatter v6067.
Originally published on 2019-02-19.