



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation
Intel S9256WK1HLC

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

CPU2017 License: 13


Test Sponsor: Intel Corporation

Tested by: Intel Corporation

Test Date: Mar-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

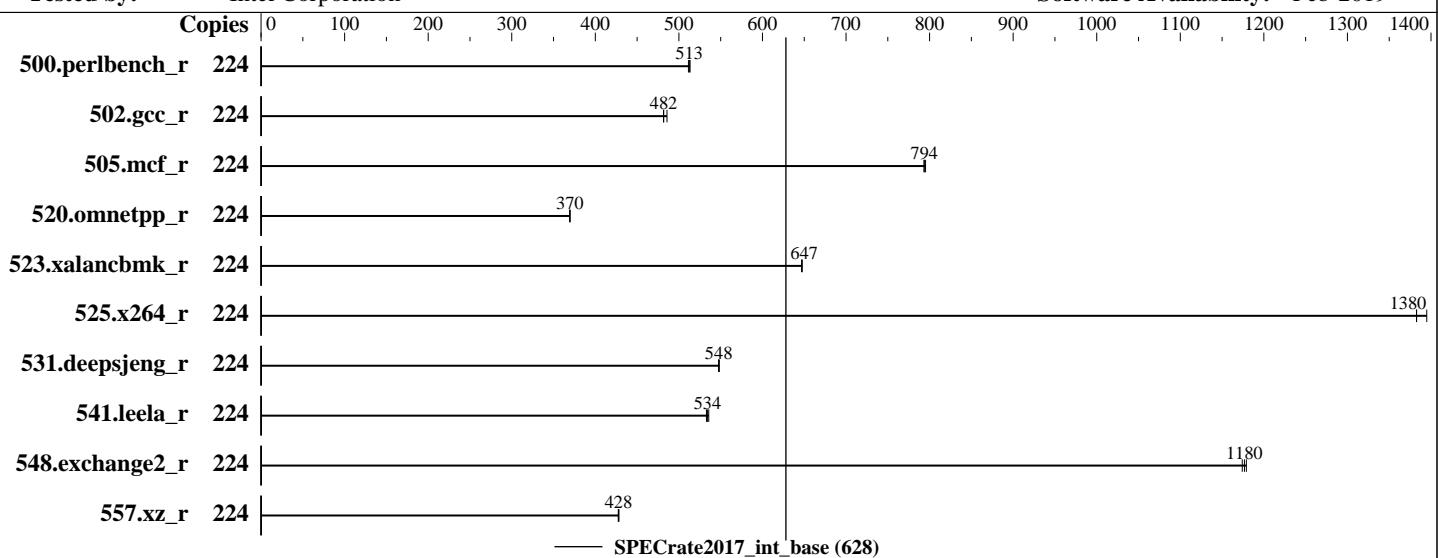

Hardware

CPU Name: Intel Xeon Platinum 9282
Max MHz.: 3800
Nominal: 2600
Enabled: 112 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 77 MB I+D on chip per chip, 38.5 MB shared / 28 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC4-2933Y-R, running at 2933)
Storage: Toshiba XG5 NVMe SSD 512GB, M.2 PCIe
Other: None

Software

OS: CentOS Linux release 7.6.1810 (Core) 4.20.0+
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel: No
Firmware: Version SE5C620.86B.0D.01.0403.022020190327 Released Feb-2019
File System: xfs
System State: Run level 5 (multi-user graphical)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation
Intel S9256WK1HLC

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

CPU2017 License: 13

Test Sponsor: Intel Corporation

Tested by: Intel Corporation

Test Date: Mar-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	697	511	695	513	696	513							
502.gcc_r	224	658	482	658	482	653	486							
505.mcf_r	224	456	793	455	795	456	794							
520.omnetpp_r	224	796	369	795	370	795	370							
523.xalancbmk_r	224	365	647	366	647	365	647							
525.x264_r	224	281	1390	284	1380	284	1380							
531.deepsjeng_r	224	468	548	469	547	469	548							
541.leela_r	224	694	534	696	533	692	536							
548.exchange2_r	224	500	1170	499	1180	498	1180							
557.xz_r	224	566	427	566	428	565	428							

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/DCPerfKit/src/cpu2017/lib/ia32:/home/DCPerfKit/src/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation
Intel S9256WK1HLC

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

CPU2017 License: 13

Test Date: Mar-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Feb-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

CPU Power and Performance Policy set to Performance

Advanced -> Power & Performance -> CPU Power and Performance Policy -> Performance

IMC Interleaving set to 1-way Interleave

Advanced -> Memory Configuration -> IMC Interleaving -> 1-way Interleave

Sub_NUMA Cluster set to Enabled

Advanced -> Memory Configuration -> Memory RAS and Performance Configuration -> Sub_NUMA Cluster -> Enabled

Sysinfo program /home/DCPerfKit/src/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on localhost.localdomain Mon Mar 11 13:22:43 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Genuine Intel(R) CPU 0000%@  
 2 "physical id"s (chips)  
 224 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
  cpu cores : 56  
  siblings : 112  
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
  28 29 30  
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
  28 29 30
```

From lscpu:

```
Architecture:          x86_64  
CPU op-mode(s):       32-bit, 64-bit  
Byte Order:           Little Endian  
CPU(s):               224  
On-line CPU(s) list:  0-223  
Thread(s) per core:   2  
Core(s) per socket:   56  
Socket(s):            2  
NUMA node(s):         8  
Vendor ID:            GenuineIntel  
CPU family:           6  
Model:                85  
Model name:           Genuine Intel(R) CPU 0000%@
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation
Intel S9256WK1HLC

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

CPU2017 License: 13

Test Date: Mar-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Feb-2019

Platform Notes (Continued)

Stepping: 6
CPU MHz: 1955.522
CPU max MHz: 3800.0000
CPU min MHz: 1000.0000
BogoMIPS: 5200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
NUMA node4 CPU(s): 56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
NUMA node5 CPU(s): 60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
NUMA node6 CPU(s): 84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
NUMA node7 CPU(s): 88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni flush_lld arch_capabilities

/proc/cpuinfo cache data
cache size : 39424 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128 129 133 134 135
node 0 size: 95382 MB
node 0 free: 94992 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131 132 136 137 138 139
node 1 size: 96762 MB
node 1 free: 96516 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154 155 156 157 161 162 163

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation
Intel S9256WK1HLC

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

CPU2017 License: 13

Test Date: Mar-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Feb-2019

Platform Notes (Continued)

```
node 2 size: 96762 MB
node 2 free: 96147 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
159 160 164 165 166 167
node 3 size: 96762 MB
node 3 free: 96553 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
183 184 185 189 190 191
node 4 size: 96738 MB
node 4 free: 96523 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
187 188 192 193 194 195
node 5 size: 96762 MB
node 5 free: 96566 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
210 211 212 213 217 218 219
node 6 size: 96762 MB
node 6 free: 95599 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
209 214 215 216 220 221 222 223
node 7 size: 96759 MB
node 7 free: 96071 MB
node distances:
node   0    1    2    3    4    5    6    7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      791238276 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
centos-release: CentOS Linux release 7.6.1810 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.6 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation
Intel S9256WK1HLC

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

CPU2017 License: 13

Test Date: Mar-2019

Test Sponsor: Intel Corporation

Hardware Availability: Jun-2019

Tested by: Intel Corporation

Software Availability: Feb-2019

Platform Notes (Continued)

```
PRETTY_NAME="CentOS Linux 7 (Core)"  
ANSI_COLOR="0;31"  
CPE_NAME="cpe:/o:centos:centos:7"  
redhat-release: CentOS Linux release 7.6.1810 (Core)  
system-release: CentOS Linux release 7.6.1810 (Core)  
system-release-cpe: cpe:/o:centos:centos:7
```

uname -a:

```
Linux localhost.localdomain 4.20.0+ #2 SMP Fri Feb 22 13:13:14 PST 2019 x86_64 x86_64  
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling

run-level 5 Mar 11 13:19

SPEC is set to: /home/DCPerfKit/src/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/centos-home	xfs	418G	108G	311G	26%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.0D.01.0403.022020190327 02/20/2019

Memory:

24x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018
```

```
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation

Intel S9256WK1HLC

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

CPU2017 License: 13

Test Sponsor: Intel Corporation

Tested by: Intel Corporation

Test Date: Mar-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

=====
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Intel Corporation
Intel S9256WK1HLC

SPECrate2017_int_base = 628

SPECrate2017_int_peak = Not Run

CPU2017 License: 13

Test Sponsor: Intel Corporation

Tested by: Intel Corporation

Test Date: Mar-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-Platform-Settings-V1.1.html>
<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-Platform-Settings-V1.1.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-11 13:22:42-0400.

Report generated on 2019-05-31 19:57:13 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-03.