



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 6230)

SPECspeed2017\_fp\_base = 128

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Oct-2018

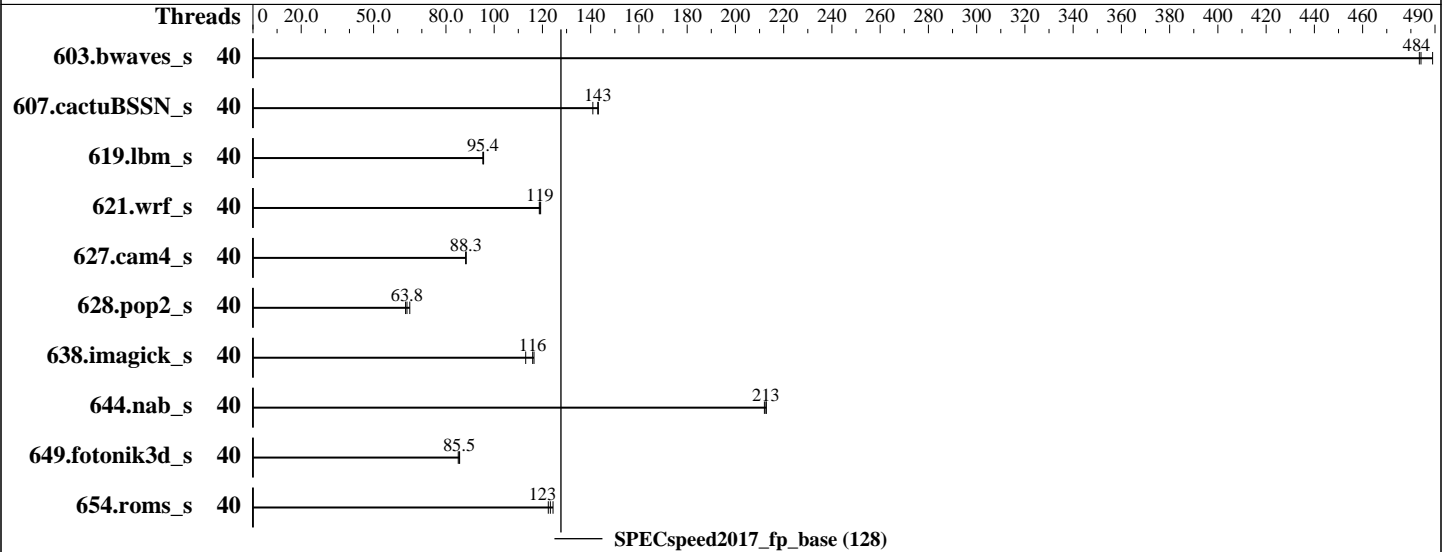

### Hardware

CPU Name: Intel Xeon Gold 6230  
 Max MHz.: 3900  
 Nominal: 2100  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
 Kernel 3.10.0-957.el7.x86\_64  
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++  
 C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.0.117 of Fortran  
 Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version O0E135M 2.10 released Jan-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 6230)

SPECspeed2017\_fp\_base = 128

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Oct-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	40	121	489	<u>122</u>	<u>484</u>	122	484							
607.cactuBSSN_s	40	118	141	116	143	<u>117</u>	<u>143</u>							
619.lbm_s	40	<u>54.9</u>	<u>95.4</u>	54.8	95.6	54.9	95.4							
621.wrf_s	40	<u>111</u>	<u>119</u>	111	119	111	119							
627.cam4_s	40	100	88.3	<u>100</u>	<u>88.3</u>	100	88.3							
628.pop2_s	40	183	65.0	188	63.3	<u>186</u>	<u>63.8</u>							
638.imagick_s	40	128	113	<u>124</u>	<u>116</u>	124	116							
644.nab_s	40	82.1	213	<u>82.2</u>	<u>213</u>	82.4	212							
649.fotonik3d_s	40	107	85.1	<u>107</u>	<u>85.5</u>	106	85.7							
654.roms_s	40	129	122	127	124	<u>128</u>	<u>123</u>							

SPECspeed2017\_fp\_base = 128

SPECspeed2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19/lib/ia32:/home/cpu2017-1.0.5-ic19/lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017-1.0.5-ic19/je5.0.1-32:/home/cpu2017-1.0.5-ic19/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 6230)

SPECspeed2017\_fp\_base = 128

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Oct-2018

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance  
Choose Operating Mode set to Custom Mode  
CPU P-state Control set to Cooperative  
C-States set to legacy  
Adjacent Cache Prefetcher set to Disable  
DCU Streamer Prefetcher set to Disable  
DCA set to Disable  
Uncore Frequency Turbo set to Disable

```
Sysinfo program /home/cpu2017-1.0.5-ic19/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Sat Mar 16 02:19:31 2019
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
 2 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 80
On-line CPU(s) list: 0-79
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
Stepping: 6
CPU MHz: 845.562
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 6230)

SPECspeed2017\_fp\_base = 128

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Oct-2018

### Platform Notes (Continued)

```

Virtualization:      VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           28160K
NUMA node0 CPU(s): 0-19,40-59
NUMA node1 CPU(s): 20-39,60-79
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni spec_ctrl intel_stibp
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 28160 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 40 41 42 43 44 45 46 47
48 49 50 51 52 53 54 55 56 57 58 59
node 0 size: 196280 MB
node 0 free: 190576 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 60 61 62 63 64
65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
node 1 size: 196608 MB
node 1 free: 191220 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo
MemTotal:      395878664 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_fp\_base = 128

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 6230)

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Oct-2018

### Platform Notes (Continued)

```
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

run-level 3 Mar 16 01:17

```
SPEC is set to: /home/cpu2017-1.0.5-ic19
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs    442G   18G  424G   4% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[00E135M-2.10]- 01/16/2019
Memory:
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed2017\_fp\_base = 128

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 6230)

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Oct-2018

## Compiler Version Notes (Continued)

=====  
FC 607.cactuBSSN\_s(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 128

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 6230)

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Oct-2018

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 6230)

SPECspeed2017\_fp\_base = 128

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Oct-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.2019-04-02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.2019-04-02.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-15 14:19:30-0400.

Report generated on 2019-04-02 16:57:13 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.