SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed2017_int_base = 10.0

SPECspeed2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Sep-2018

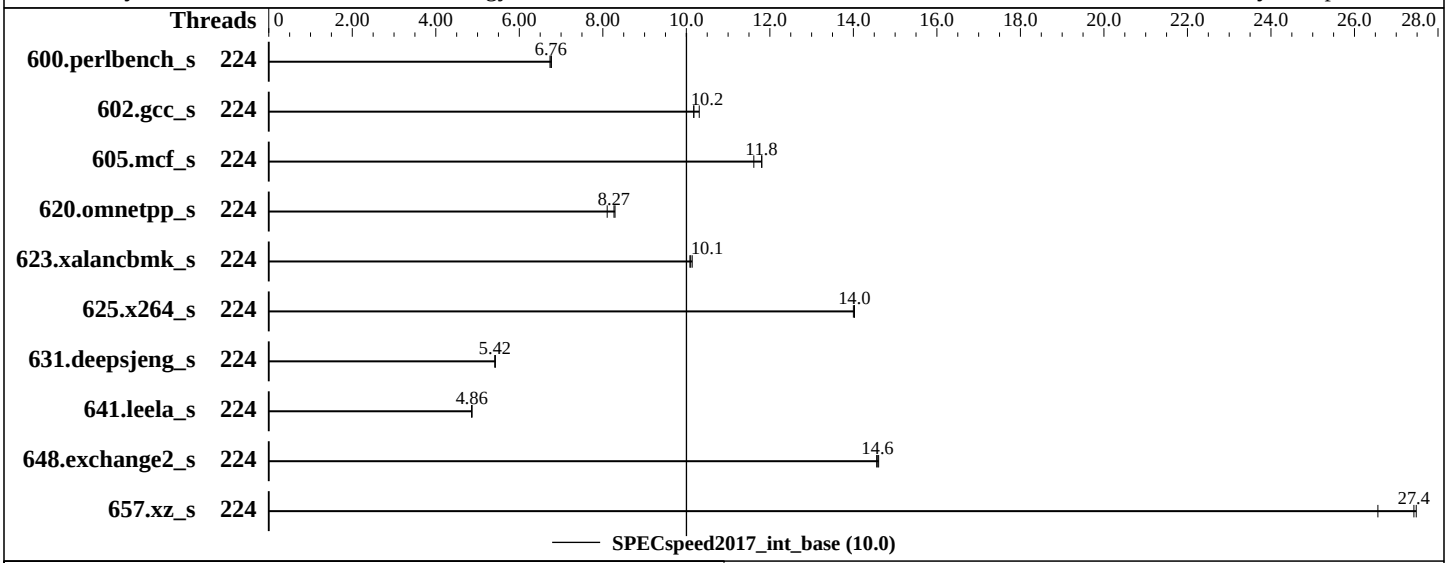

Hardware

CPU Name:	Intel Xeon Platinum 8280L
Max MHz.:	4000
Nominal:	2700
Enabled:	224 cores, 8 chips
Orderable:	2,4,6,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 (x86_64) Kernel 4.12.14-25.13-default
Compiler:	C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Lenovo BIOS Version PSE121C 1.50 released Jan-2019
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1

SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed2017_int_base = 10.0

SPECspeed2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Sep-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	224	264	6.73	**263**	**6.76**	262	6.77							
602.gcc_s	224	**391**	**10.2**	391	10.2	386	10.3							
605.mcf_s	224	406	11.6	**400**	**11.8**	400	11.8							
620.omnetpp_s	224	**197**	**8.27**	197	8.29	201	8.10							
623.xalancbmk_s	224	140	10.1	**140**	**10.1**	141	10.1							
625.x264_s	224	126	14.0	**126**	**14.0**	126	14.0							
631.deepsjeng_s	224	264	5.43	265	5.42	**264**	**5.42**							
641.leela_s	224	351	4.86	351	4.86	**351**	**4.86**							
648.exchange2_s	224	**202**	**14.6**	201	14.6	202	14.6							
657.xz_s	224	225	27.5	**225**	**27.4**	233	26.6							

SPECspeed2017_int_base = 10.0

SPECspeed2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19/lib/ia32:/home/cpu2017-1.0.5-ic19/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017-1.0.5-ic19/je5.0.1-32:/home/cpu2017-1.0.5-ic19/je5.0.1-64"
OMP_STACKSIZE = "192M"
 Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
```

(Continued on next page)

General Notes (Continued)

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Choose Operating Mode set to Custom Mode
CPU P-state Control set to Cooperative
C1 Enhanced Mode set to Enable
C-States set to Legacy
Hyper-Threading set to Disable
Adjacent Cache Prefetch set to Disable
 Sysinfo program /home/cpu2017-1.0.5-ic19/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-ov0t Sat Mar 16 15:49:35 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz
       8  "physical id"s (chips)
       224 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
```

(Continued on next page)

Platform Notes (Continued)

```
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                224
      On-line CPU(s) list:   0-223
      Thread(s) per core:    1
      Core(s) per socket:    28
      Socket(s):             8
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz
      Stepping:              6
      CPU MHz:               2700.000
      CPU max MHz:           4000.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-27
      NUMA node1 CPU(s):     28-55
      NUMA node2 CPU(s):     56-83
      NUMA node3 CPU(s):     84-111
      NUMA node4 CPU(s):     112-139
      NUMA node5 CPU(s):     140-167
      NUMA node6 CPU(s):     168-195
      NUMA node7 CPU(s):     196-223
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
      avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
      flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 39424 KB
```

(Continued on next page)

Platform Notes (Continued)

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
  node 0 size: 386649 MB
  node 0 free: 383050 MB
  node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55
  node 1 size: 387061 MB
  node 1 free: 386422 MB
  node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
  81 82 83
  node 2 size: 387061 MB
  node 2 free: 386827 MB
  node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
  106 107 108 109 110 111
  node 3 size: 387061 MB
  node 3 free: 386818 MB
  node 4 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129
  130 131 132 133 134 135 136 137 138 139
  node 4 size: 387061 MB
  node 4 free: 386838 MB
  node 5 cpus: 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157
  158 159 160 161 162 163 164 165 166 167
  node 5 size: 387061 MB
  node 5 free: 386832 MB
  node 6 cpus: 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185
  186 187 188 189 190 191 192 193 194 195
  node 6 size: 387061 MB
  node 6 free: 386824 MB
  node 7 cpus: 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213
  214 215 216 217 218 219 220 221 222 223
  node 7 size: 387029 MB
  node 7 free: 386826 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  21  31  21  21  31  31  31
    1:  21  10  21  31  31  21  31  31
    2:  31  21  10  21  31  31  21  31
    3:  21  31  21  10  31  31  31  21
    4:  21  31  31  31  10  21  21  31
    5:  31  21  31  31  21  10  31  21
    6:  31  31  21  31  21  31  10  21
    7:  31  31  31  21  31  21  21  10

From /proc/meminfo
   MemTotal:       3170352056 kB
```

(Continued on next page)

Platform Notes (Continued)

```
    HugePages_Total:       0
    Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15"
       VERSION_ID="15"
       PRETTY_NAME="SUSE Linux Enterprise Server 15"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15"

  uname -a:
    Linux linux-ov0t 4.12.14-25.13-default #1 SMP Tue Aug 14 15:07:35 UTC 2018 (947aa51)
    x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2017-5754 (Meltdown):          Not affected
  CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
  IBPB, IBRS_FW

  run-level 3 Mar 16 15:48

  SPEC is set to: /home/cpu2017-1.0.5-ic19
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sdc3      btrfs  892G   30G  862G   4% /home

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS Lenovo -[PSE121C-1.50]- 01/16/2019
    Memory:
     96x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
      657.xz_s(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.2019-04-02.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.2019-04-02.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-16 03:49:34-0400.
Report generated on 2019-04-02 16:57:12 by CPU2017 PS formatter v6067.
Originally published on 2019-04-02.