SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7251, 2.10GHz)

SPECrate2017_fp_base = 111

SPECrate2017_fp_peak = 114

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2019
Hardware Availability: Feb-2019
Software Availability: Feb-2019

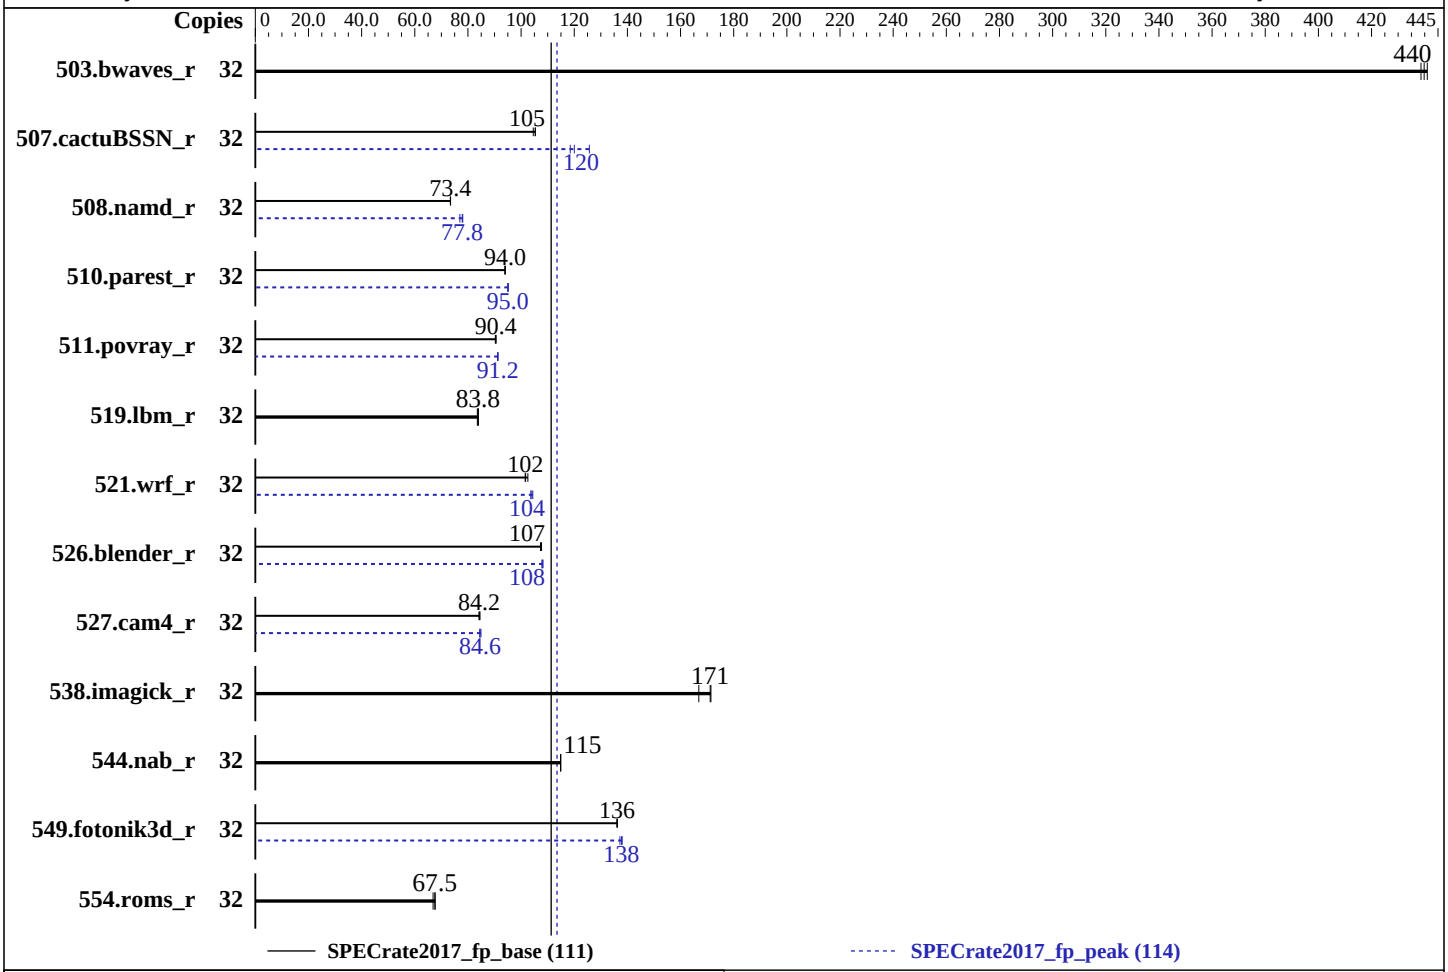

Hardware

CPU Name:	AMD EPYC 7251
Max MHz.:	2900
Nominal:	2100
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	32 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2666V-L, running at 2400)
Storage:	1 x 120 GB SATA SSD
Other:	None

Software

OS:	Ubuntu 18.04.2 LTS kernel 4.15.0-45-generic
Compiler:	C/C++: Version 1.3.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	Version 1.7.6 released Jan-2019
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator library V4.5.0

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7251, 2.10GHz)

SPECrate2017_fp_base = 111

SPECrate2017_fp_peak = 114

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2019
Hardware Availability: Feb-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	**730**	**440**	728	441	732	439	32	**730**	**440**	728	441	732	439
507.cactuBSSN_r	32	**385**	**105**	385	105	387	105	32	322	126	**338**	**120**	342	118
508.namd_r	32	**414**	**73.4**	414	73.5	414	73.4	32	395	77.0	**391**	**77.8**	389	78.1
510.parest_r	32	**891**	**94.0**	891	93.9	890	94.0	32	880	95.2	881	95.0	**881**	**95.0**
511.povray_r	32	825	90.6	**826**	**90.4**	827	90.3	32	820	91.1	818	91.3	**819**	**91.2**
519.lbm_r	32	**403**	**83.8**	404	83.5	402	83.9	32	**403**	**83.8**	404	83.5	402	83.9
521.wrf_r	32	706	102	**705**	**102**	699	103	32	**689**	**104**	687	104	692	104
526.blender_r	32	453	108	**454**	**107**	454	107	32	450	108	**451**	**108**	452	108
527.cam4_r	32	662	84.5	**664**	**84.2**	665	84.2	32	659	84.9	**662**	**84.6**	663	84.4
538.imagick_r	32	**465**	**171**	477	167	464	171	32	**465**	**171**	477	167	464	171
544.nab_r	32	**469**	**115**	469	115	469	115	32	**469**	**115**	469	115	469	115
549.fotonik3d_r	32	915	136	917	136	**916**	**136**	32	909	137	903	138	**905**	**138**
554.roms_r	32	**753**	**67.5**	751	67.7	760	66.9	32	**753**	**67.5**	751	67.7	760	66.9

SPECrate2017_fp_base = 111

SPECrate2017_fp_peak = 114

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

(Continued on next page)

Operating System Notes (Continued)

```
Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1812na_rate_revA_lib/64;/home/cpu2017-1.0.5/amd1812na_rate_revA_lib/32:"

Binaries were compiled on a system with 2 x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5
in RHEL v7.2 under default conditions.
jemalloc: sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
jemalloc uses environment variable MALLOC_CONF
with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use
for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log
base 2). For example,
lg_chunk:21 sets the default chunk size to 2^21 =
2MiB.
```

Platform Notes

```
BIOS settings:
 Determinism Slider set to Power Determinism
 Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on r7425 Tue Mar 19 19:19:35 2019
```

(Continued on next page)

Platform Notes (Continued)

```
SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7251 8-Core Processor
      2  "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 8 12 16 20 24 28
      physical 1: cores 0 8 12 16 20 24 28

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              32
     On-line CPU(s) list: 0-31
     Thread(s) per core:  2
     Core(s) per socket:  8
     Socket(s):           2
     NUMA node(s):        8
     Vendor ID:           AuthenticAMD
     CPU family:          23
     Model:               1
     Model name:          AMD EPYC 7251 8-Core Processor
     Stepping:            2
     CPU MHz:             2777.220
     BogoMIPS:            4191.84
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           64K
     L2 cache:            512K
     L3 cache:            4096K
     NUMA node0 CPU(s):   0,8,16,24
     NUMA node1 CPU(s):   2,10,18,26
     NUMA node2 CPU(s):   4,12,20,28
     NUMA node3 CPU(s):   6,14,22,30
     NUMA node4 CPU(s):   1,9,17,25
     NUMA node5 CPU(s):   3,11,19,27
     NUMA node6 CPU(s):   5,13,21,29
     NUMA node7 CPU(s):   7,15,23,31
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
```

(Continued on next page)

Platform Notes (Continued)

```
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid amd_dcm aperfmperf pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      hw_pstate sme ssbd ibpb vmmcall fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
      clflushopt sha_ni xsaveopt xsavec xgetbv1 xsaves clzero irperf xsaveerptr arat npt
      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold avic v_vmsave_vmload vgif overflow_recov succor smca

/proc/cpuinfo cache data
   cache size : 512 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 8 16 24
  node 0 size: 128638 MB
  node 0 free: 128479 MB
  node 1 cpus: 2 10 18 26
  node 1 size: 129020 MB
  node 1 free: 128862 MB
  node 2 cpus: 4 12 20 28
  node 2 size: 129020 MB
  node 2 free: 128891 MB
  node 3 cpus: 6 14 22 30
  node 3 size: 129020 MB
  node 3 free: 128830 MB
  node 4 cpus: 1 9 17 25
  node 4 size: 128999 MB
  node 4 free: 128856 MB
  node 5 cpus: 3 11 19 27
  node 5 size: 129020 MB
  node 5 free: 128889 MB
  node 6 cpus: 5 13 21 29
  node 6 size: 129020 MB
  node 6 free: 128865 MB
  node 7 cpus: 7 15 23 31
  node 7 size: 124986 MB
  node 7 free: 124855 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  16  16  16  28  28  22  28
    1:  16  10  16  16  28  28  28  22
    2:  16  16  10  16  22  28  28  28
    3:  16  16  16  10  28  22  28  28
    4:  28  28  22  28  10  16  16  16
    5:  28  28  28  22  16  10  16  16
```

(Continued on next page)

Platform Notes (Continued)

```
     6:  22  28  28  28  16  16  10  16
     7:  28  22  28  28  16  16  16  10

  From /proc/meminfo
     MemTotal:       1052392348 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Ubuntu 18.04.2 LTS

  From /etc/*release* /etc/*version*
     debian_version: buster/sid
     os-release:
        NAME="Ubuntu"
        VERSION="18.04.2 LTS (Bionic Beaver)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 18.04.2 LTS"
        VERSION_ID="18.04"
        HOME_URL="https://www.ubuntu.com/"
        SUPPORT_URL="https://help.ubuntu.com/"

  uname -a:
     Linux r7425 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2017-5754 (Meltdown):          Not affected
  CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB

  run-level 5 Mar 19 10:11

  SPEC is set to: /home/cpu2017-1.0.5
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      ext4  109G   19G   85G  19% /

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS Dell Inc. 1.7.6 01/14/2019
    Memory:
     16x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666, configured at 2400
     16x Not Specified Not Specified
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
```


(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
     peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -inline-threshold=1000

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -z muldefs -lamdlibm -lpthread -ldl
-ljemalloc

C++ benchmarks:
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compares=false
-z muldefs -lpthread -ldl -ljemalloc

Fortran benchmarks:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(gfortran)
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm

Benchmarks using both Fortran and C:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(clang) -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -O3(gfortran) -mavx -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm

Benchmarks using both C and C++:
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compares=false -z muldefs
-lpthread -ldl -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(clang) -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compares=false
-O3(gfortran) -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:
`-std=c++98 -flto -Wl,-plugin-opt=-merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1 -finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays -mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `-flto -Wl,-plugin-opt=-merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -O3`(gfortran) `-O3`(clang) `-mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant -fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -lpthread -ldl -ljemalloc -lgfortran -lamdlibm`

554.roms_r: `basepeak = yes`

Benchmarks using both Fortran and C:

521.wrf_r: `-flto -Wl,-plugin-opt=-merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -O3`(clang) `-mavx -ffast-math -O3`(gfortran) `-funroll-loops -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant -fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -lpthread -ldl -ljemalloc -lgfortran -lamdlibm`

527.cam4_r: `-flto -Wl,-plugin-opt=-merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays -mllvm -inline-threshold=1000 -O3`(gfortran) `-O3`(clang) `-mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant`

(Continued on next page)

Peak Optimization Flags (Continued)

527.cam4_r (continued):
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm

Benchmarks using both C and C++:
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive -lpthread -ldl
-ljemalloc

Benchmarks using Fortran, C, and C++:
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive -O3 -mavx2 -madx
-funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -lpthread
-ldl -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html
http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml
http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-19 15:19:34-0400.
Report generated on 2019-04-16 17:18:31 by CPU2017 PS formatter v6067.
Originally published on 2019-04-16.