



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55


Test Date: Feb-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

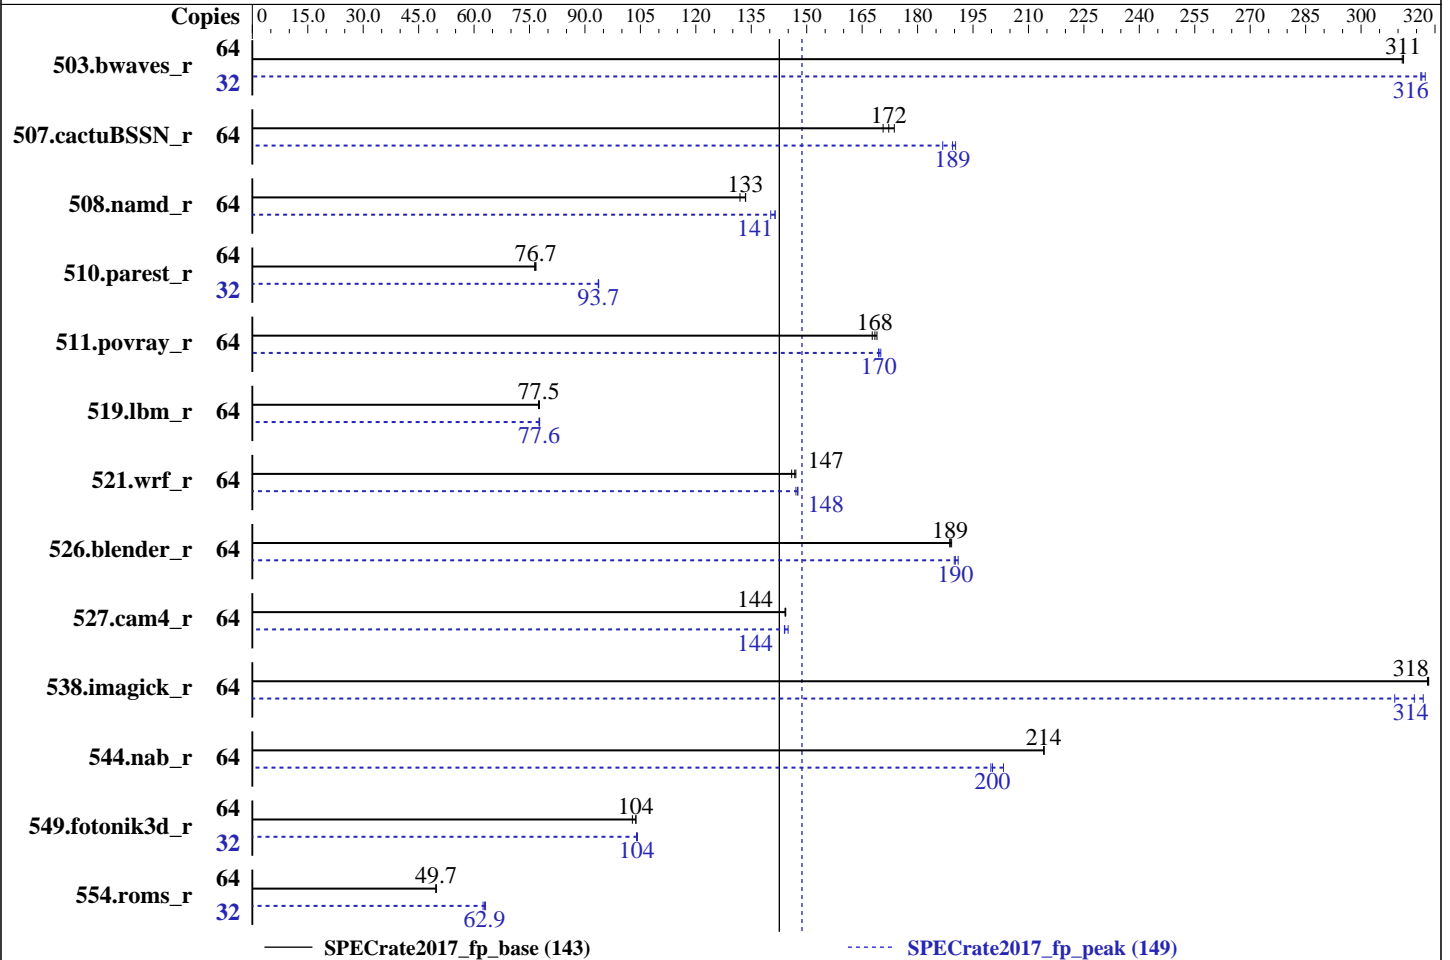

Hardware

CPU Name: AMD EPYC 7601
 Max MHz.: 3200
 Nominal: 2200
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
 Other: None
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2667V-L)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: Ubuntu 18.04.2 LTS
 kernel 4.15-45-generic
 Compiler: C/C++: Version 1.3.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: Version 1.8.4 released Feb-2019
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator library V4.5.0



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	2061	311	2060	311	2063	311	32	1011	317	1015	316	1014	316
507.cactuBSSN_r	64	466	174	475	171	471	172	64	428	189	434	187	426	190
508.namd_r	64	455	133	456	133	461	132	64	430	141	433	140	430	141
510.parest_r	64	2192	76.4	2183	76.7	2182	76.7	32	894	93.7	894	93.6	893	93.7
511.povray_r	64	884	169	891	168	887	168	64	882	169	879	170	881	170
519.lbm_r	64	871	77.4	868	77.7	870	77.5	64	869	77.6	869	77.6	868	77.7
521.wrf_r	64	975	147	977	147	982	146	64	971	148	975	147	972	148
526.blender_r	64	516	189	515	189	517	189	64	512	190	513	190	510	191
527.cam4_r	64	776	144	776	144	776	144	64	777	144	772	145	778	144
538.imagick_r	64	501	318	500	318	500	318	64	502	317	506	314	515	309
544.nab_r	64	503	214	503	214	503	214	64	530	203	539	200	538	200
549.fotonik3d_r	64	2425	103	2403	104	2403	104	32	1199	104	1197	104	1199	104
554.roms_r	64	2044	49.8	2046	49.7	2045	49.7	32	806	63.1	809	62.9	814	62.4

SPECrate2017_fp_base = 143

SPECrate2017_fp_peak = 149

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here: <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Operating System Notes (Continued)

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1812na_rate_revA_lib/64:/home/cpu2017-1.0.5/amd1812na_rate_revA_lib/32:"

Binaries were compiled on a system with 2 x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>
jemalloc uses environment variable MALLOC_CONF

with values narenas and lg_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg_chunk: set the virtual memory chunk size (log base 2). For example,

lg_chunk:21 sets the default chunk size to 2²¹ = 2MiB.

Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

C States set to Autonomous
 Memory Patrol Scrub disabled
 Memory Refresh Rate set to 1x
 PCI ASPM L1 Link Power Management disabled
 Determinism Slider set to Power Determinism
 Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on pe7415 Wed Feb 27 02:03:54 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : AMD EPYC 7601 32-Core Processor
 1 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings  : 64
 physical 0: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28
                29 30 31

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              1
NUMA node(s):          4
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7601 32-Core Processor
Stepping:               2
CPU MHz:                2260.004
BogoMIPS:               4391.72
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:                512K
L3 cache:                8192K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Date: Feb-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

Platform Notes (Continued)

```

NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid amd_dcm aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
hw_pstate sme ssbd ibpb vmmcall fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
clflushopt sha_ni xsaveopt xsavec xgetbv1 xsaves clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
node 0 size: 128699 MB
node 0 free: 128365 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61
node 1 size: 129017 MB
node 1 free: 128686 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62
node 2 size: 128996 MB
node 2 free: 128645 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63
node 3 size: 129016 MB
node 3 free: 128676 MB
node distances:
node  0  1  2  3
0:   10  16  16  16
1:   16  10  16  16
2:   16  16  10  16
3:   16  16  16  10

```

```

From /proc/meminfo
MemTotal:      528107760 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

From /etc/*release* /etc/*version*

debian_version: buster/sid

os-release:

NAME="Ubuntu"

VERSION="18.04.2 LTS (Bionic Beaver)"

ID=ubuntu

ID_LIKE=debian

PRETTY_NAME="Ubuntu 18.04.2 LTS"

VERSION_ID="18.04"

HOME_URL="https://www.ubuntu.com/"

SUPPORT_URL="https://help.ubuntu.com/"

uname -a:

Linux pe7415 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB

run-level 5 Feb 26 14:40

SPEC is set to: /home/cpu2017-1.0.5

Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 1.8T 18G 1.7T 2% /

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.8.4 02/22/2019

Memory:

8x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666

8x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins

AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Date: Feb-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====
 CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)

=====
 AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
 AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====
 CC 511.povray_r(base, peak) 526.blender_r(base, peak)

=====
 AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
 AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin
 AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
 AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====
 FC 507.cactuBSSN_r(base, peak)

=====
 AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
 AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin
 AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
 AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin
 GNU Fortran (GCC) 4.8.2
 Copyright (C) 2013 Free Software Foundation, Inc.
 GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
 You may redistribute copies of GNU Fortran

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING

CC 521.wrf_r(base, peak) 527.cam4_r(base, peak)

GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -z muldefs -lamdlibm -lpthread -ldl
-ljemalloc
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -freemap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compares=false
-z muldefs -lpthread -ldl -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(gfortran)
-O3(clang) -mavx -madox -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(clang) -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -O3(gfortran) -mavx -madox -funroll-loops
-z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compares=false -z muldefs
-lpthread -ldl -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(clang) -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compares=false
-O3(gfortran) -mavx -madox -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -lpthread
-ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(clang) -mavx
-ffast-math -O3(gfortran) -funroll-loops
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -O3(gfortran) -O3(clang)
-mavx2 -madx -funroll-loops -ffast-math
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive -lpthread -ldl
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive -O3 -mavx2 -madx
-funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -lpthread
-ldl -ljemalloc
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 143

Dell PowerEdge R7415 (AMD EPYC 7601, 2.20GHz)

SPECrate2017_fp_peak = 149

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-02-26 21:03:53-0500.

Report generated on 2019-04-16 17:18:31 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-16.