SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7451, 2.30GHz)

SPECrate2017_int_base = 254

SPECrate2017_int_peak = 265

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2019
Hardware Availability: Jan-2019
Software Availability: Feb-2019

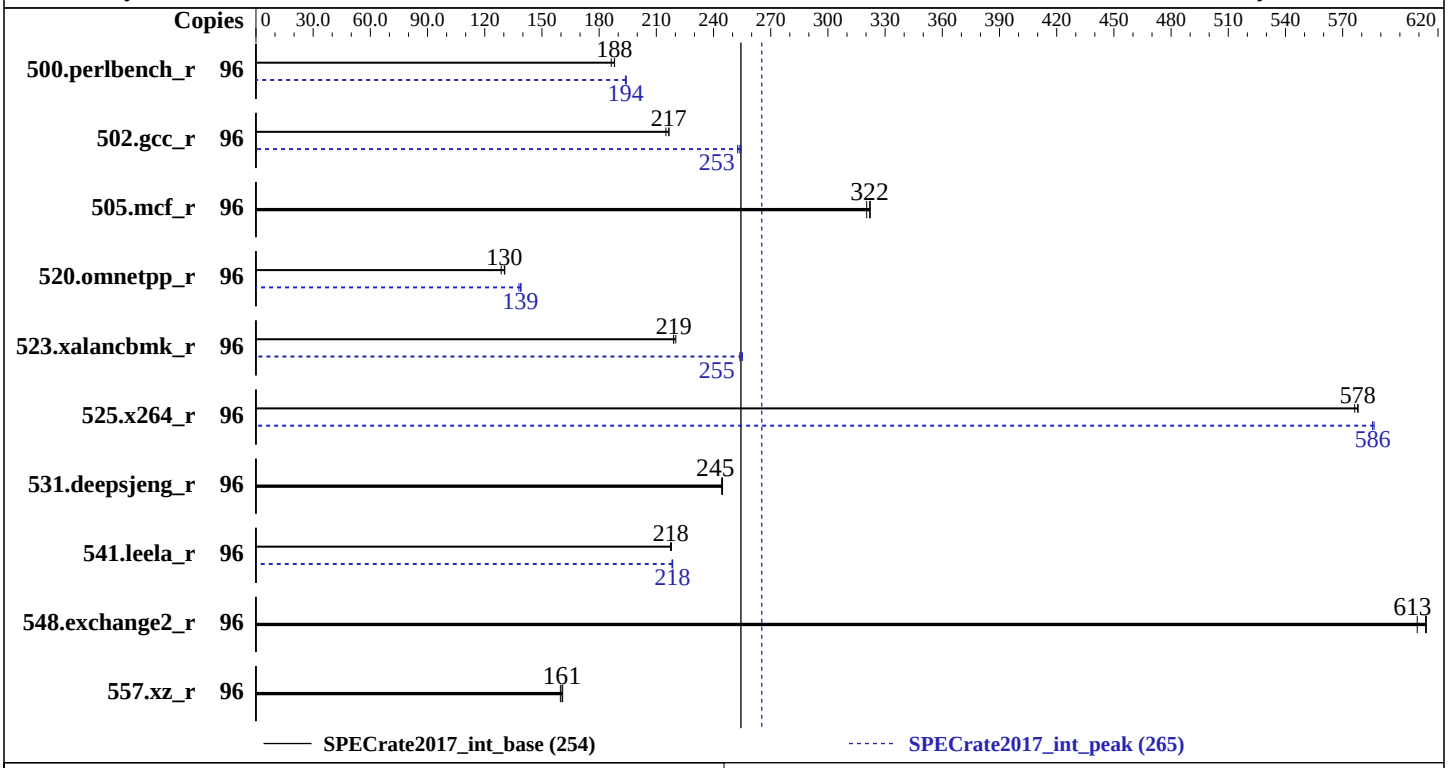

Hardware

CPU Name:	AMD EPYC 7451
Max MHz.:	3200
Nominal:	2300
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	64 MB I+D on chip per chip, 8 MB shared / 3 cores
Other:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)
Storage:	1 x 120 GB SATA SSD
Other:	None

Software

OS:	Ubuntu 18.04.2 LTS kernel 4.15.0-45-generic
Compiler:	C/C++: Version 1.3.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	Version 1.7.6 released Jan-2019
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library V5.1.0;

SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7451, 2.30GHz)

SPECrate2017_int_base = 254

SPECrate2017_int_peak = 265

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2019
Hardware Availability: Jan-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	812	188	**813**	**188**	820	186	96	789	194	787	194	**788**	**194**
502.gcc_r	96	**628**	**217**	628	217	632	215	96	534	254	538	253	**536**	**253**
505.mcf_r	96	484	320	**482**	**322**	481	322	96	484	320	**482**	**322**	481	322
520.omnetpp_r	96	**967**	**130**	979	129	965	131	96	**908**	**139**	906	139	913	138
523.xalancbmk_r	96	463	219	**463**	**219**	460	220	96	397	255	**398**	**255**	400	254
525.x264_r	96	292	576	**291**	**578**	291	578	96	**287**	**586**	287	587	287	586
531.deepsjeng_r	96	450	244	**450**	**245**	450	245	96	450	244	**450**	**245**	450	245
541.leela_r	96	731	217	730	218	**730**	**218**	96	729	218	**728**	**218**	727	219
548.exchange2_r	96	410	614	413	609	**410**	**613**	96	410	614	413	609	**410**	**613**
557.xz_r	96	**646**	**161**	644	161	649	160	96	**646**	**161**	644	161	649	160

SPECrate2017_int_base = 254

SPECrate2017_int_peak = 265

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
```

(Continued on next page)

Operating System Notes (Continued)

```
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1812na_rate_revA_lib/64;/home/cpu2017-1.0.5/amd1812na_rate_revA_lib/32:"

Binaries were compiled on a system with 2 x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v4.8.5
in RHEL v7.2 under default conditions.
jemalloc: sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
jemalloc uses environment variable MALLOC_CONF
with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use
for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log
base 2). For example,
lg_chunk:21 sets the default chunk size to 2^21 =
2MiB.
```

Platform Notes

```
BIOS settings:
 Determinism Slider set to Power Determinism
 Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on r7425 Wed Mar 20 11:57:29 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : AMD EPYC 7451 24-Core Processor
      2  "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 48
      physical 0: cores 0 1 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
      physical 1: cores 0 1 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              96
     On-line CPU(s) list: 0-95
     Thread(s) per core:  2
     Core(s) per socket:  24
     Socket(s):           2
     NUMA node(s):        8
     Vendor ID:           AuthenticAMD
     CPU family:          23
     Model:               1
     Model name:          AMD EPYC 7451 24-Core Processor
     Stepping:            2
     CPU MHz:             3042.936
     BogoMIPS:            4591.29
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           64K
     L2 cache:            512K
     L3 cache:            8192K
     NUMA node0 CPU(s):   0,8,16,24,32,40,48,56,64,72,80,88
     NUMA node1 CPU(s):   2,10,18,26,34,42,50,58,66,74,82,90
     NUMA node2 CPU(s):   4,12,20,28,36,44,52,60,68,76,84,92
     NUMA node3 CPU(s):   6,14,22,30,38,46,54,62,70,78,86,94
     NUMA node4 CPU(s):   1,9,17,25,33,41,49,57,65,73,81,89
     NUMA node5 CPU(s):   3,11,19,27,35,43,51,59,67,75,83,91
     NUMA node6 CPU(s):   5,13,21,29,37,45,53,61,69,77,85,93
     NUMA node7 CPU(s):   7,15,23,31,39,47,55,63,71,79,87,95
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid amd_dcm aperfmperf pni
     pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
     rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
```


(Continued on next page)

Platform Notes (Continued)

```
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      hw_pstate sme ssbd ibpb vmmcall fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
      clflushopt sha_ni xsaveopt xsavec xgetbv1 xsaves clzero irperf xsaveerptr arat npt
      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold avic v_vmsave_vmload vgif overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88
    node 0 size: 128638 MB
    node 0 free: 128461 MB
    node 1 cpus: 2 10 18 26 34 42 50 58 66 74 82 90
    node 1 size: 129020 MB
    node 1 free: 128838 MB
    node 2 cpus: 4 12 20 28 36 44 52 60 68 76 84 92
    node 2 size: 129020 MB
    node 2 free: 128837 MB
    node 3 cpus: 6 14 22 30 38 46 54 62 70 78 86 94
    node 3 size: 129020 MB
    node 3 free: 128833 MB
    node 4 cpus: 1 9 17 25 33 41 49 57 65 73 81 89
    node 4 size: 128999 MB
    node 4 free: 128825 MB
    node 5 cpus: 3 11 19 27 35 43 51 59 67 75 83 91
    node 5 size: 129020 MB
    node 5 free: 128879 MB
    node 6 cpus: 5 13 21 29 37 45 53 61 69 77 85 93
    node 6 size: 129020 MB
    node 6 free: 128853 MB
    node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95
    node 7 size: 124986 MB
    node 7 free: 124803 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  16  16  16  28  28  22  28
      1:  16  10  16  16  28  28  28  22
      2:  16  16  10  16  22  28  28  28
      3:  16  16  16  10  28  22  28  28
      4:  28  28  22  28  10  16  16  16
      5:  28  28  28  22  16  10  16  16
      6:  22  28  28  28  16  16  10  16
      7:  28  22  28  28  16  16  16  10
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/meminfo
   MemTotal:       1052392344 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Ubuntu 18.04.2 LTS

From /etc/*release* /etc/*version*
   debian_version: buster/sid
   os-release:
      NAME="Ubuntu"
      VERSION="18.04.2 LTS (Bionic Beaver)"
      ID=ubuntu
      ID_LIKE=debian
      PRETTY_NAME="Ubuntu 18.04.2 LTS"
      VERSION_ID="18.04"
      HOME_URL="https://www.ubuntu.com/"
      SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
   Linux r7425 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB

run-level 5 Mar 20 11:54

SPEC is set to: /home/cpu2017-1.0.5
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext4  109G   19G   85G  19% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Dell Inc. 1.7.6 01/14/2019
  Memory:
   16x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666
   16x Not Specified Not Specified

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
      peak) 541.leela_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 525.x264_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
CXXC 541.leela_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -function-specialize
-z muldefs -lamdlibm -lpthread -ldl -ljemalloc

502.gcc_r: Same as 500.perlbench_r

505.mcf_r: Same as 500.perlbench_r

525.x264_r: Same as 500.perlbench_r

557.xz_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -function-specialize
-z muldefs -lpthread -ldl -ljemalloc

C++ benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compares=false
-z muldefs -lpthread -ldl -ljemalloc

Fortran benchmarks:
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3(gfortran) -O3(clang)
-mavx -madx -funroll-loops -ffast-math -frepack-arrays -z muldefs
-fplugin=dragonegg.so -specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -lpthread -ldl
-ljemalloc -lgfortran -lamdlibm

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares

(Continued on next page)

Peak Optimization Flags (Continued)

500.perlbench_r (continued):
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -fstruct-layout=3
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -fgnu89-inline -lpthread
-ldl -L/root/work/lib/jemalloc510/lib32 -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mno-avx2 -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization -lamdlibm -ljemalloc
-lpthread -ldl

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl
-L/root/work/lib/jemalloc510/lib32 -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-enable-vectorize-compares -fprofile-instr-generate`(pass 1) `-fprofile-instr-use`(pass 2) `-Ofast -march=znver1 -mllvm -unroll-count=8 -mllvm -unroll-threshold=100 -lpthread -ldl -ljemalloc`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html`
`http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml`
`http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-20 07:57:28-0400.
Report generated on 2019-04-16 17:19:10 by CPU2017 PS formatter v6067.
Originally published on 2019-04-16.