# SPEC® CPU2017 Integer Rate Result



## ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Silver 4116)

SPECrate2017_int_base = 120

SPECrate2017_int_peak = 125

| | | | |
|---|---|---|---|
| **CPU2017 License:** | 9016 | **Test Date:** | Mar-2019 |
| **Test Sponsor:** | ASUSTeK Computer Inc. | **Hardware Availability:** | Feb-2019 |
| **Tested by:** | ASUSTeK Computer Inc. | **Software Availability:** | Nov-2018 |

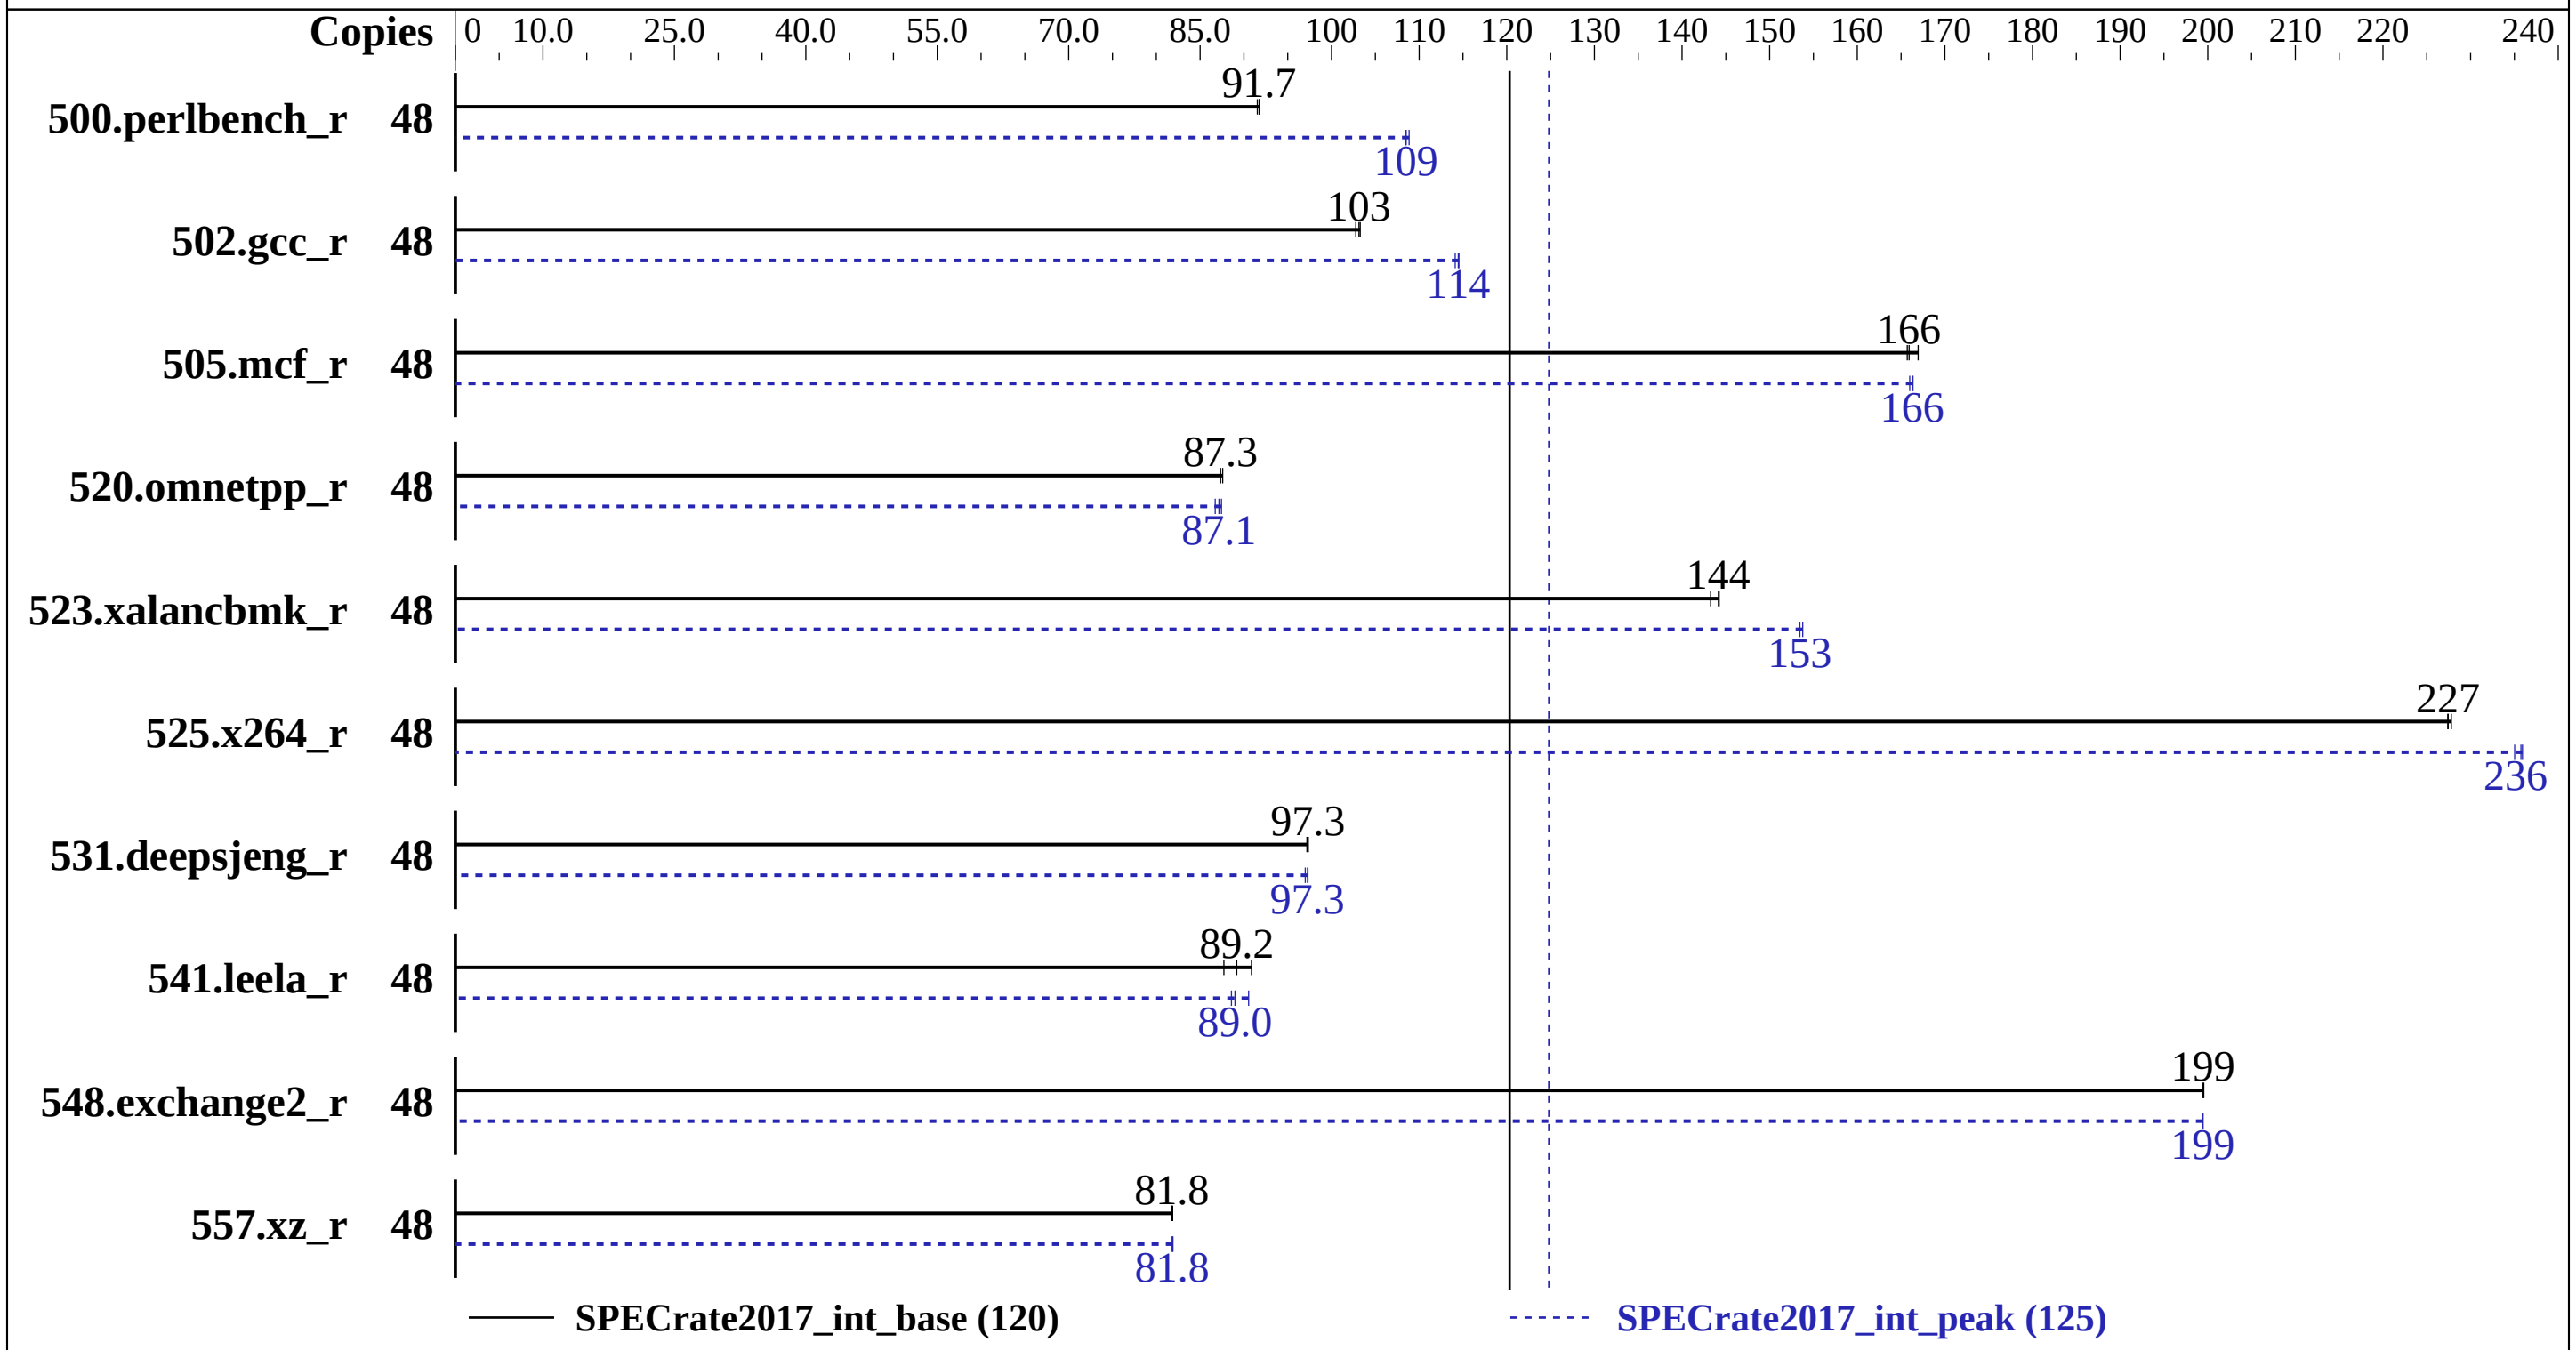


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Silver 4116 |
| Max MHz.: | 3000 |
| Nominal: | 2100 |
| Enabled: | 24 cores, 2 chips, 2 threads/core |
| Orderable: | 1, 2 chip(s) |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 16.5 MB I+D on chip per chip |
| Other: | None |
| Memory: | 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R, running at 2400) |
| Storage: | 1 x 1 TB SATA SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.120-94.17-default |
| Compiler: | C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux |
| Parallel: | No |
| Firmware: | Version 5102 released Mar-2019 tested as Feb-2019 |
| File System: | btrfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc: jemalloc memory allocator library V5.0.1 |

# SPEC CPU2017 Integer Rate Result



## ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Silver 4116)

SPECrate2017_int_base = 120

SPECrate2017_int_peak = 125

**CPU2017 License:** 9016
**Test Sponsor:** ASUSTeK Computer Inc.
**Tested by:** ASUSTeK Computer Inc.
**Test Date:** Mar-2019
**Hardware Availability:** Feb-2019
**Software Availability:** Nov-2018

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 48 | 833 | 91.7 | **833** | **91.7** | 835 | 91.5 | 48 | **704** | **109** | 702 | 109 | 705 | 108 |
| 502.gcc_r | 48 | 658 | 103 | 661 | 103 | **659** | **103** | 48 | **594** | **114** | 593 | 115 | 596 | 114 |
| 505.mcf_r | 48 | 468 | 166 | **468** | **166** | 465 | 167 | 48 | **467** | **166** | 466 | 166 | 467 | 166 |
| 520.omnetpp_r | 48 | **721** | **87.3** | 719 | 87.6 | 721 | 87.3 | 48 | 720 | 87.4 | **723** | **87.1** | 726 | 86.7 |
| 523.xalancbmk_r | 48 | 354 | 143 | **352** | **144** | 351 | 144 | 48 | 330 | 154 | 330 | 153 | **330** | **153** |
| 525.x264_r | 48 | 369 | 228 | 370 | 227 | **370** | **227** | 48 | 358 | 235 | **357** | **236** | 356 | 236 |
| 531.deepsjeng_r | 48 | 565 | 97.3 | **565** | **97.3** | 566 | 97.2 | 48 | 567 | 97.0 | **566** | **97.3** | 565 | 97.3 |
| 541.leela_r | 48 | **891** | **89.2** | 906 | 87.7 | 875 | 90.9 | 48 | 897 | 88.6 | 878 | 90.5 | **893** | **89.0** |
| 548.exchange2_r | 48 | 630 | 200 | 630 | 199 | **630** | **199** | 48 | **631** | **199** | 630 | 199 | 631 | 199 |
| 557.xz_r | 48 | **634** | **81.8** | 633 | 81.9 | 634 | 81.7 | 48 | **634** | **81.8** | 634 | 81.8 | 633 | 81.9 |

SPECrate2017_int_base = 120

SPECrate2017_int_peak = 125

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017_2019u1/lib/ia32:/spec2017_2019u1/lib/intel64:
/spec2017_2019u1/je5.0.1-32:/spec2017_2019u1/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 jemalloc: jemalloc, a general purpose malloc implementation
 jemalloc: built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 jemalloc: sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

## General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS Configuration:
SNC = Enabled
IMC interleaving = 1 way
Patrol Scrub = Disabled
VT-d = Disabled
ENERGY_PERF_BIAS_CFG mode = Performance
HyperThreading = Enabled
 Sysinfo program /spec2017_2019u1/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-pmm5 Wed Mar 27 15:33:45 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
       2  "physical id"s (chips)
       48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 12
       siblings  : 24
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                48
      On-line CPU(s) list:   0-47
      Thread(s) per core:    2
      Core(s) per socket:    12
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
```

(Continued on next page)

## Platform Notes (Continued)

```
     Stepping:              4
     CPU MHz:               1824.266
     CPU max MHz:           3000.0000
     CPU min MHz:           800.0000
     BogoMIPS:              4199.99
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              16896K
     NUMA node0 CPU(s):     0-2,6-8,24-26,30-32
     NUMA node1 CPU(s):     3-5,9-11,27-29,33-35
     NUMA node2 CPU(s):     12-14,18-20,36-38,42-44
     NUMA node3 CPU(s):     15-17,21-23,39-41,45-47
     Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
     aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
     fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
     xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
     dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
     retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
     avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
     clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku
     ospke

/proc/cpuinfo cache data
   cache size : 16896 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32
  node 0 size: 192056 MB
  node 0 free: 189375 MB
  node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35
  node 1 size: 193519 MB
  node 1 free: 192891 MB
  node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
  node 2 size: 193519 MB
  node 2 free: 189442 MB
  node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
  node 3 size: 193515 MB
  node 3 free: 192564 MB
  node distances:
  node   0   1   2   3
    0:  10  11  21  21
```

(Continued on next page)

## Platform Notes (Continued)

```
     1:  11  10  21  21
     2:  21  21  10  11
     3:  21  21  11  10

 From /proc/meminfo
    MemTotal:       791153672 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Mitigation: PTI
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

 run-level 3 Mar 27 15:14

 SPEC is set to: /spec2017_2019u1
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda2      btrfs  933G   70G  863G   8% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 5102 02/11/2019
   Memory:
```

(Continued on next page)

## Platform Notes (Continued)

```
    24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
CC   502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
      peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

## Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

## Base Optimization Flags

C benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)

# Base Optimization Flags (Continued)

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

# Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64 -std=c11

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):
icpc -m64

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

# Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

# Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.html
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.xml
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml



For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-27 03:33:44-0400.
Report generated on 2019-05-02 11:28:52 by CPU2017 PS formatter v6067.
Originally published on 2019-05-01.