SPEC® CPU2017 Floating Point Rate Result

Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 277

SPECrate2017_fp_peak = 282

CPU2017 License:	001176	**Test Date:**	Apr-2019
Test Sponsor:	Supermicro	**Hardware Availability:**	Apr-2019
Tested by:	Supermicro	**Software Availability:**	Dec-2018

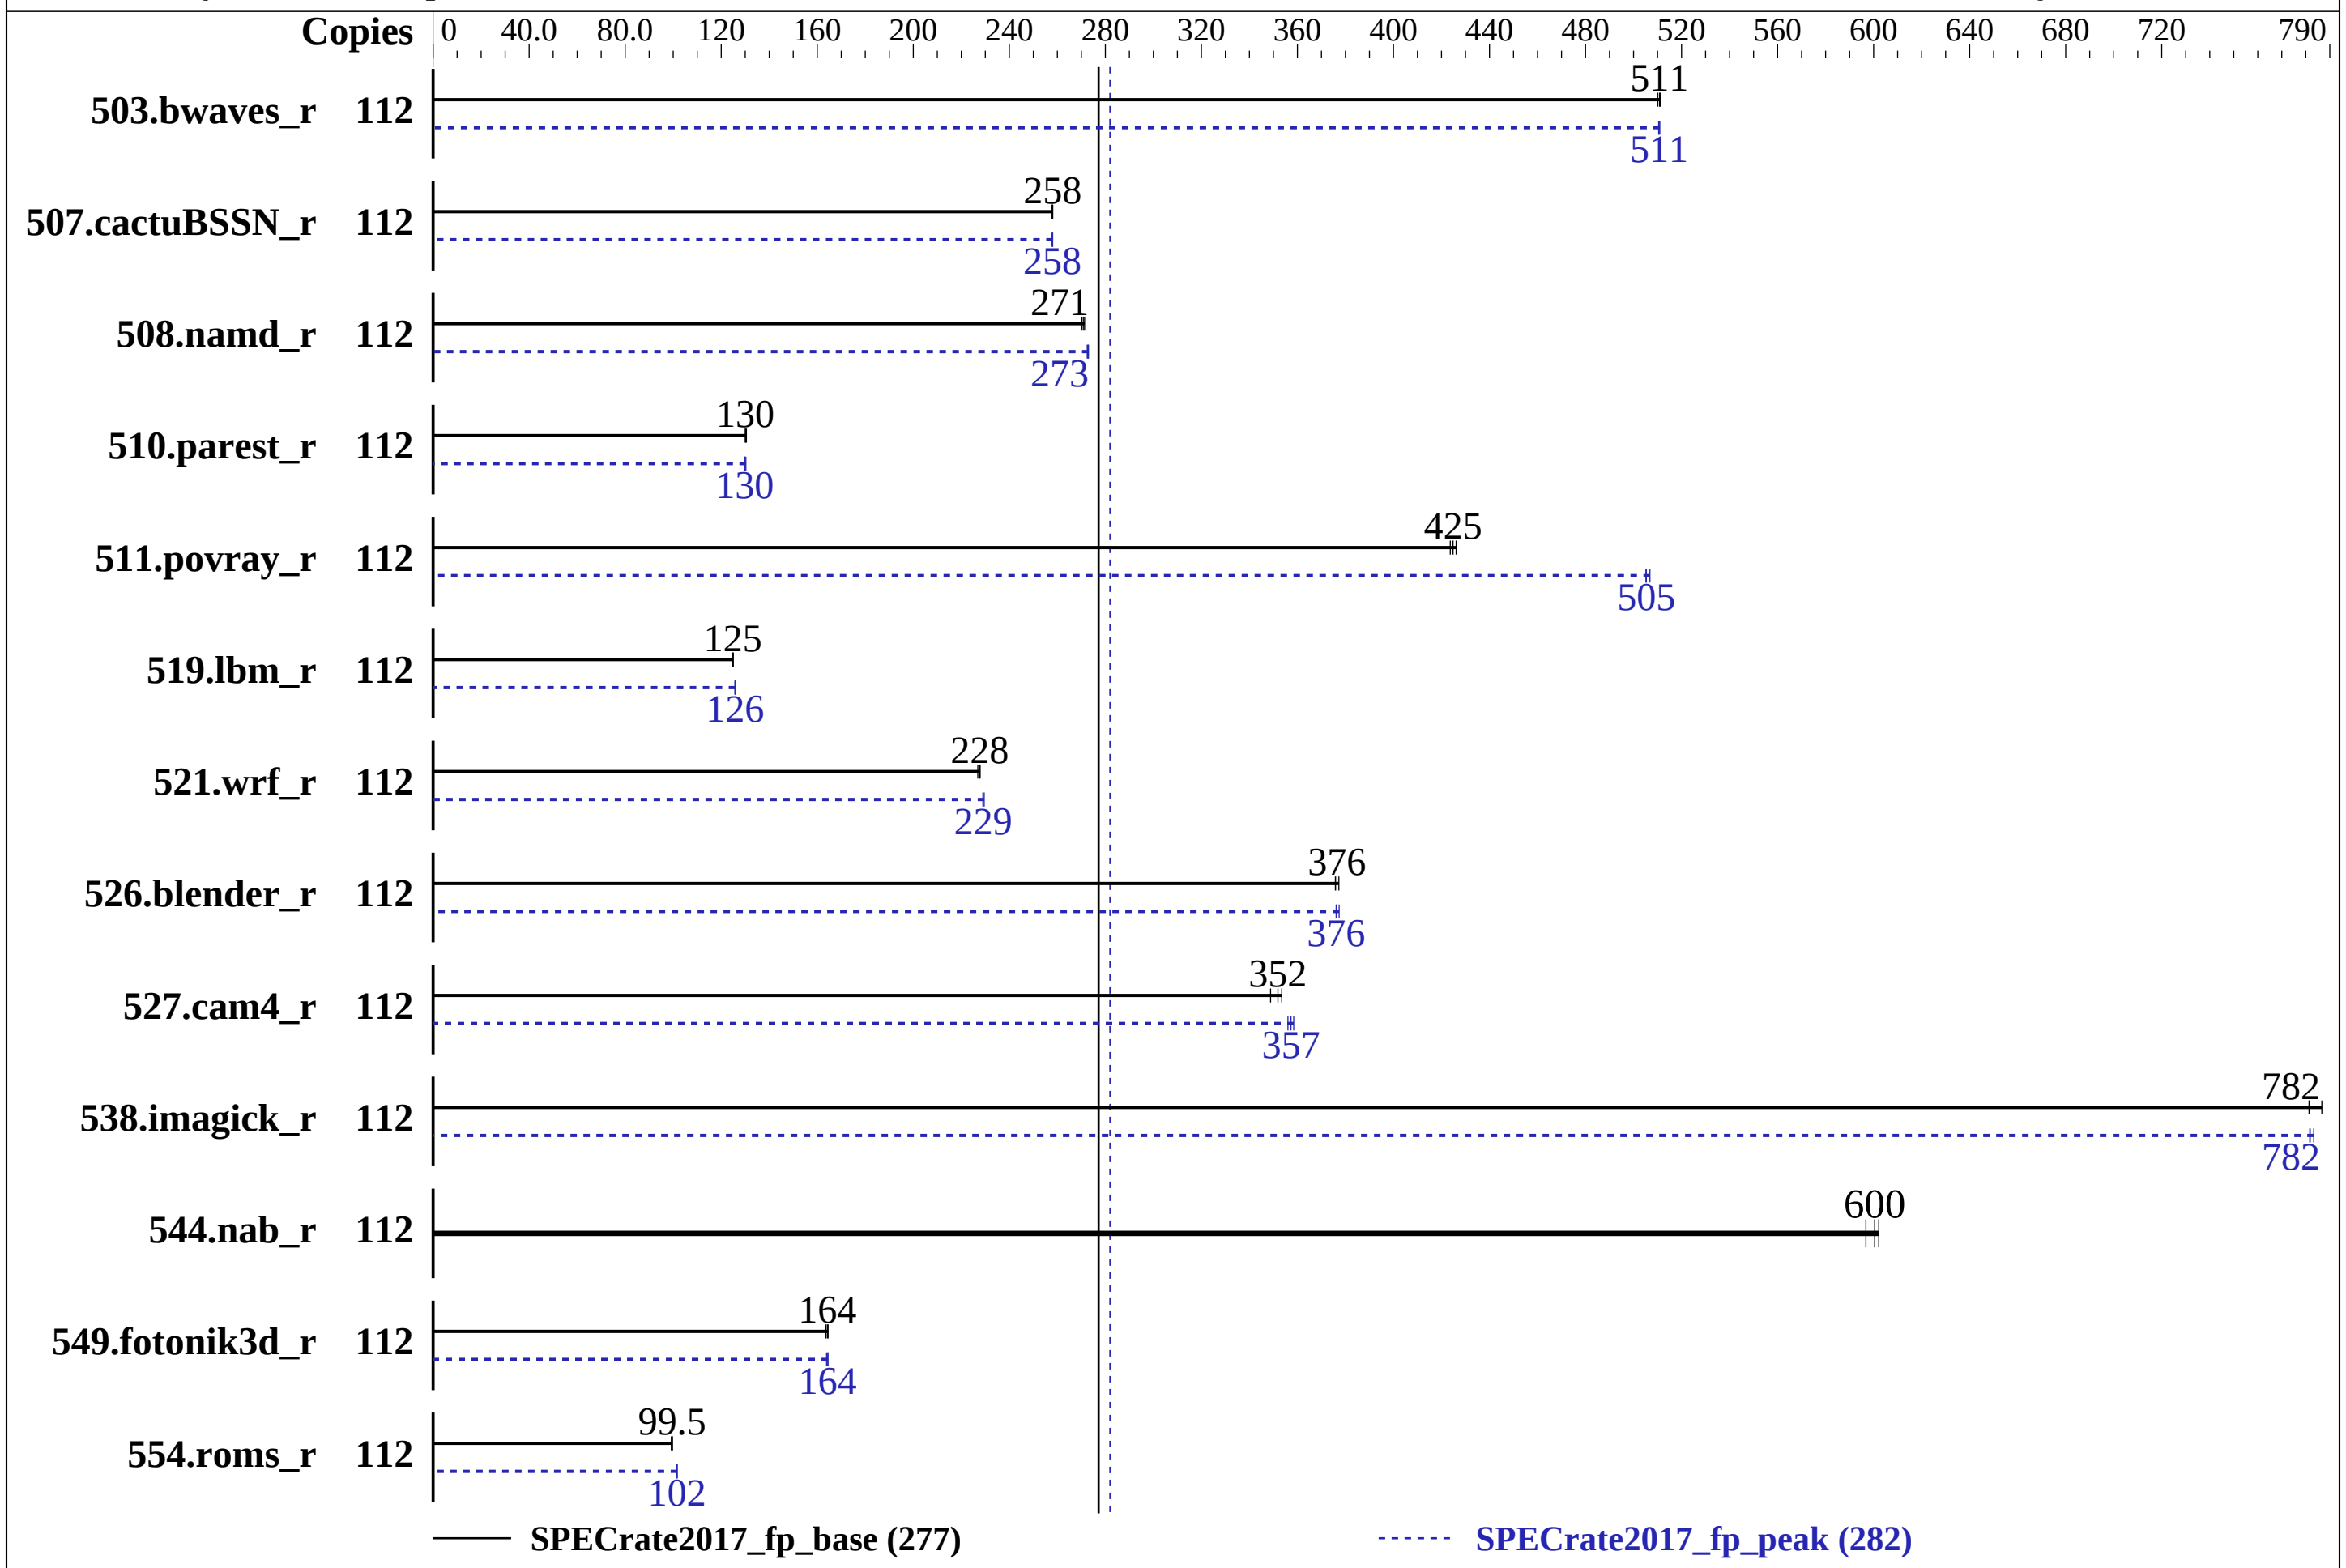

Hardware

CPU Name:	Intel Xeon Platinum 8280
Max MHz.:	4000
Nominal:	2700
Enabled:	56 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 2 TB SATA III HDD, 7200 RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 3.0c released Mar-2019
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 277

SPECrate2017_fp_peak = 282

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2197	511	**2199**	**511**	2202	510	112	2198	511	**2199**	**511**	2200	510
507.cactuBSSN_r	112	549	258	550	258	**550**	**258**	112	550	258	**550**	**258**	549	258
508.namd_r	112	394	270	392	271	**393**	**271**	112	391	272	390	273	**390**	**273**
510.parest_r	112	2253	130	2245	130	**2252**	**130**	112	2249	130	2257	130	**2257**	**130**
511.povray_r	112	614	426	**616**	**425**	617	424	112	516	507	**518**	**505**	518	505
519.lbm_r	112	946	125	**945**	**125**	945	125	112	**938**	**126**	939	126	938	126
521.wrf_r	112	**1102**	**228**	1106	227	1101	228	112	**1095**	**229**	1096	229	1093	230
526.blender_r	112	**453**	**376**	452	377	454	376	112	452	377	**453**	**376**	453	376
527.cam4_r	112	**557**	**352**	554	353	562	349	112	**548**	**357**	550	356	546	358
538.imagick_r	112	354	787	**356**	**782**	356	781	112	356	783	356	782	**356**	**782**
544.nab_r	112	**314**	**600**	316	597	313	602	112	**314**	**600**	316	597	313	602
549.fotonik3d_r	112	**2657**	**164**	2653	165	2667	164	112	**2655**	**164**	2663	164	2654	164
554.roms_r	112	1794	99.2	1786	99.7	**1788**	**99.5**	112	1756	101	**1751**	**102**	1751	102

SPECrate2017_fp_base = 277

SPECrate2017_fp_peak = 282

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Monitor/Mwait = Disable
LLC prefetch = Disable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
Hardware P-state = Out of Band Mode
SNC = Enable
XPT Prefetch = Disable
Stale AtoS = Disable
LLC dead line alloc = Enable
IMC Interleaving = 1-way Interleave
SDDC Plus One = Disable
ADDDC Sparing = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-1g5v Sat Apr 13 04:10:58 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
      2  "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu:
     Architecture:          x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU op-mode(s):         32-bit, 64-bit
      Byte Order:             Little Endian
      CPU(s):                 112
      On-line CPU(s) list:    0-111
      Thread(s) per core:     2
      Core(s) per socket:     28
      Socket(s):              2
      NUMA node(s):           4
      Vendor ID:              GenuineIntel
      CPU family:             6
      Model:                  85
      Model name:             Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
      Stepping:               7
      CPU MHz:                2700.000
      BogoMIPS:               5400.00
      Virtualization:         VT-x
      L1d cache:              32K
      L1i cache:              32K
      L2 cache:               1024K
      L3 cache:               39424K
      NUMA node0 CPU(s):      0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
      NUMA node1 CPU(s):      4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
      NUMA node2 CPU(s):      28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
      NUMA node3 CPU(s):      32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
      intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
      xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
      pts hwp_epp pku ospke avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 39424 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
   79
   node 0 size: 95228 MB
   node 0 free: 80891 MB
   node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
```

(Continued on next page)

Platform Notes (Continued)

```
    82 83
    node 1 size: 96752 MB
    node 1 free: 85166 MB
    node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
    101 105 106 107
    node 2 size: 96752 MB
    node 2 free: 85052 MB
    node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
    108 109 110 111
    node 3 size: 96563 MB
    node 3 free: 84754 MB
    node distances:
    node   0   1   2   3
      0:  10  11  21  21
      1:  11  10  21  21
      2:  21  21  10  11
      3:  21  21  11  10

  From /proc/meminfo
     MemTotal:       394544392 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP4

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 4
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP4"
        VERSION_ID="12.4"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp4"

  uname -a:
     Linux linux-1g5v 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:
```

(Continued on next page)

Platform Notes (Continued)

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Apr 12 19:39

SPEC is set to: /home/cpu2017
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda2      btrfs  1.6T   78G  1.5T   5% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS American Megatrends Inc. 3.0c 03/27/2019
  Memory:
   4x NO DIMM NO DIMM
   12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Peak Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

(Continued on next page)

Peak Optimization Flags (Continued)

526.blender_r: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revC.xml

Tested with SPEC CPU2017 v1.0.5 on 2019-04-12 16:10:58-0400.
Report generated on 2019-04-30 17:46:00 by CPU2017 PS formatter v6067.
Originally published on 2019-04-30.