SPEC® CPU2017 Floating Point Speed Result

Fujitsu

PRIMEQUEST 3800B2, Intel Xeon Platinum 8280L, 2.70GHz

SPECspeed2017_fp_base =	244
SPECspeed2017_fp_peak =	Not Run

CPU2017 License:	19	**Test Date:**	Apr-2019
Test Sponsor:	Fujitsu	**Hardware Availability:**	Apr-2019
Tested by:	Fujitsu	**Software Availability:**	Feb-2019

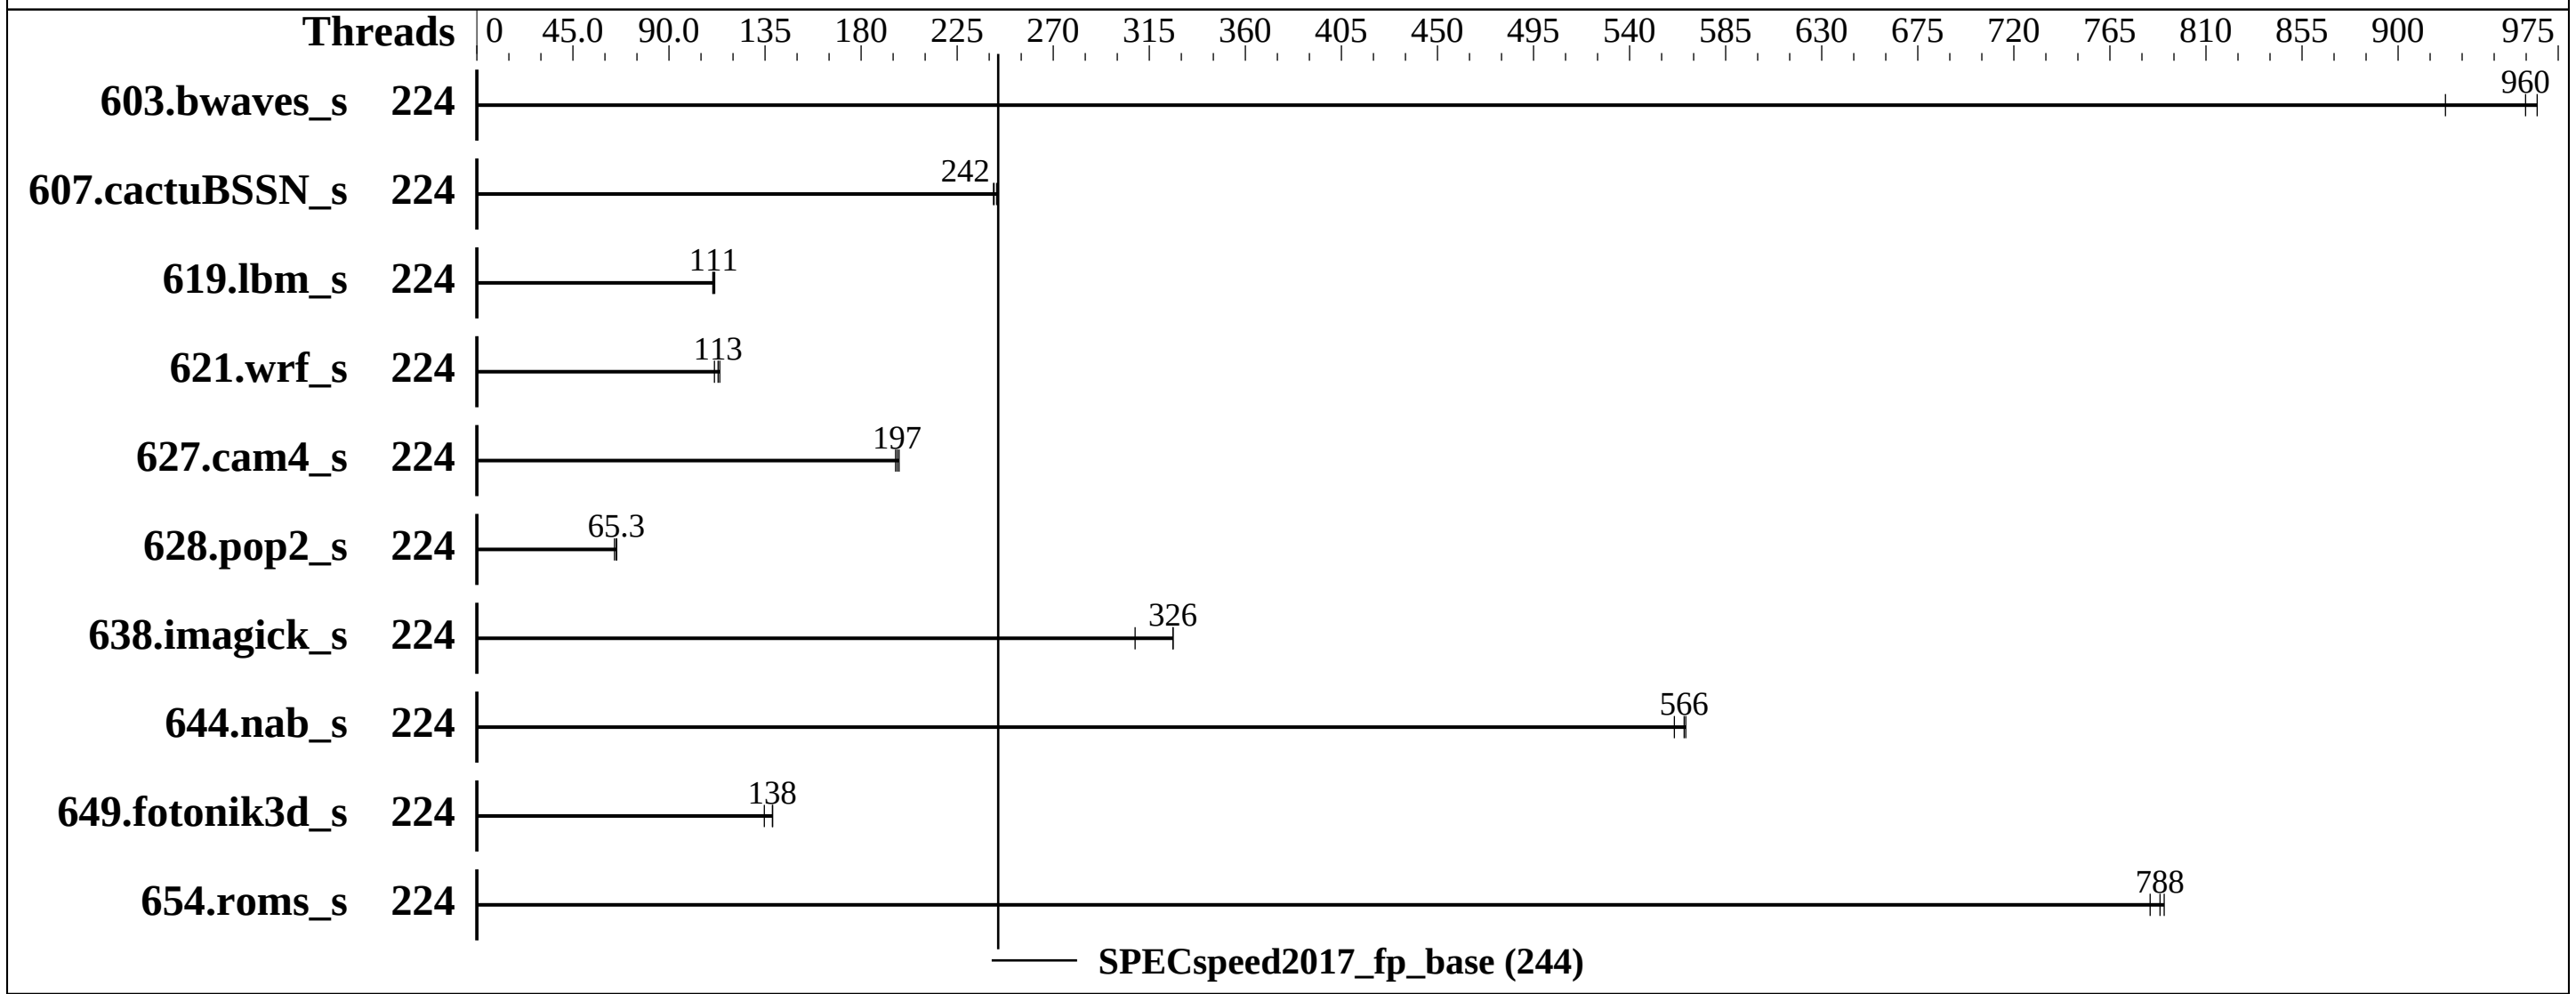

Hardware

CPU Name:	Intel Xeon Platinum 8280L
Max MHz.:	4000
Nominal:	2700
Enabled:	224 cores, 8 chips
Orderable:	2,4,6,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x SAS HDD, 900GB, 15K RPM, SAS HDD
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.6 (Maipo) 3.10.0-957.el7.x86_64
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Fujitsu BIOS Version V1.0.0.0 R1.21.0 for D3858-B1x. Released Jun-2019 tested as V1.0.0.0 R91.11.0 for D3858-B1x Mar-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Floating Point Speed Result

Fujitsu

PRIMEQUEST 3800B2, Intel Xeon Platinum 8280L, 2.70GHz

SPECspeed2017_fp_base = 244

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

	Base							Peak						
Benchmark	**Threads**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Threads**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
603.bwaves_s	224	64.0	922	61.1	965	**61.5**	**960**							
607.cactuBSSN_s	224	**68.8**	**242**	68.9	242	68.5	243							
619.lbm_s	224	47.4	111	47.0	111	**47.2**	**111**							
621.wrf_s	224	**117**	**113**	119	111	116	114							
627.cam4_s	224	44.8	198	45.2	196	**45.0**	**197**							
628.pop2_s	224	184	64.5	**182**	**65.3**	181	65.5							
638.imagick_s	224	44.2	326	46.8	308	**44.2**	**326**							
644.nab_s	224	31.1	561	30.9	566	**30.9**	**566**							
649.fotonik3d_s	224	67.7	135	65.8	139	**65.8**	**138**							
654.roms_s	224	**20.0**	**788**	20.1	784	19.9	790							

SPECspeed2017_fp_base = **244**

SPECspeed2017_fp_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-223
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017/lib/intel64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages disabled by default
 echo never > /sys/kernel/mm/transparent_hugepage/enabled
 echo never > /sys/kernel/mm/transparent_hugepage/defrag
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Adjacent Cache Line Prefetch = Disabled
Fan Control = Full
Hyper-Threading = Disabled
Intel Virtualization Technology = Disabled
P-State Coordination = SW_ANY
Stale AtoS = Enabled
Sub NUMA Clustering = Disabled
Uncore Frequency Scaling = Disabled
Sysinfo program /home/Benchmark/speccpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Sat Apr  6 10:32:11 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz
      8  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                224
```

(Continued on next page)

Platform Notes (Continued)

```
     On-line CPU(s) list:   0-223
     Thread(s) per core:    1
     Core(s) per socket:    28
     Socket(s):             8
     NUMA node(s):          8
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz
     Stepping:              6
     CPU MHz:               3999.902
     CPU max MHz:           4000.0000
     CPU min MHz:           1000.0000
     BogoMIPS:              5400.00
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              39424K
     NUMA node0 CPU(s):     0-27
     NUMA node1 CPU(s):     28-55
     NUMA node2 CPU(s):     56-83
     NUMA node3 CPU(s):     84-111
     NUMA node4 CPU(s):     112-139
     NUMA node5 CPU(s):     140-167
     NUMA node6 CPU(s):     168-195
     NUMA node7 CPU(s):     196-223
     Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
     aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
     fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
     xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
     intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
     vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
     avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
     xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
     pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni spec_ctrl
     intel_stibp flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 39424 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.

 From /proc/meminfo
```

(Continued on next page)

Platform Notes (Continued)

```
   MemTotal:       3169097232 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.6 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VARIANT="Server"
      VARIANT_ID="server"
      VERSION_ID="7.6"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
   redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS

run-level 3 Apr 6 05:06

SPEC is set to: /home/Benchmark/speccpu2017
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   783G  7.2G  776G   1% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS FUJITSU V1.0.0.0 R91.11.0 for D3858-B1x           03/15/2019
  Memory:
   80x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933
   16x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP`

Fortran benchmarks:
`-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs`

Benchmarks using both Fortran and C:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP`

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevC.2019-04-30.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevC.2019-04-30.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-05 21:32:10-0400.
Report generated on 2019-04-30 17:46:53 by CPU2017 PS formatter v6067.
Originally published on 2019-04-30.