SPEC® CPU2017 Floating Point Speed Result

Huawei

Huawei 5288 V5 (Intel Xeon Gold 6244)

SPECspeed2017_fp_base = 108

SPECspeed2017_fp_peak = Not Run

CPU2017 License:	3175	**Test Date:**	Feb-2019
Test Sponsor:	Huawei	**Hardware Availability:**	Apr-2019
Tested by:	Huawei	**Software Availability:**	Dec-2018

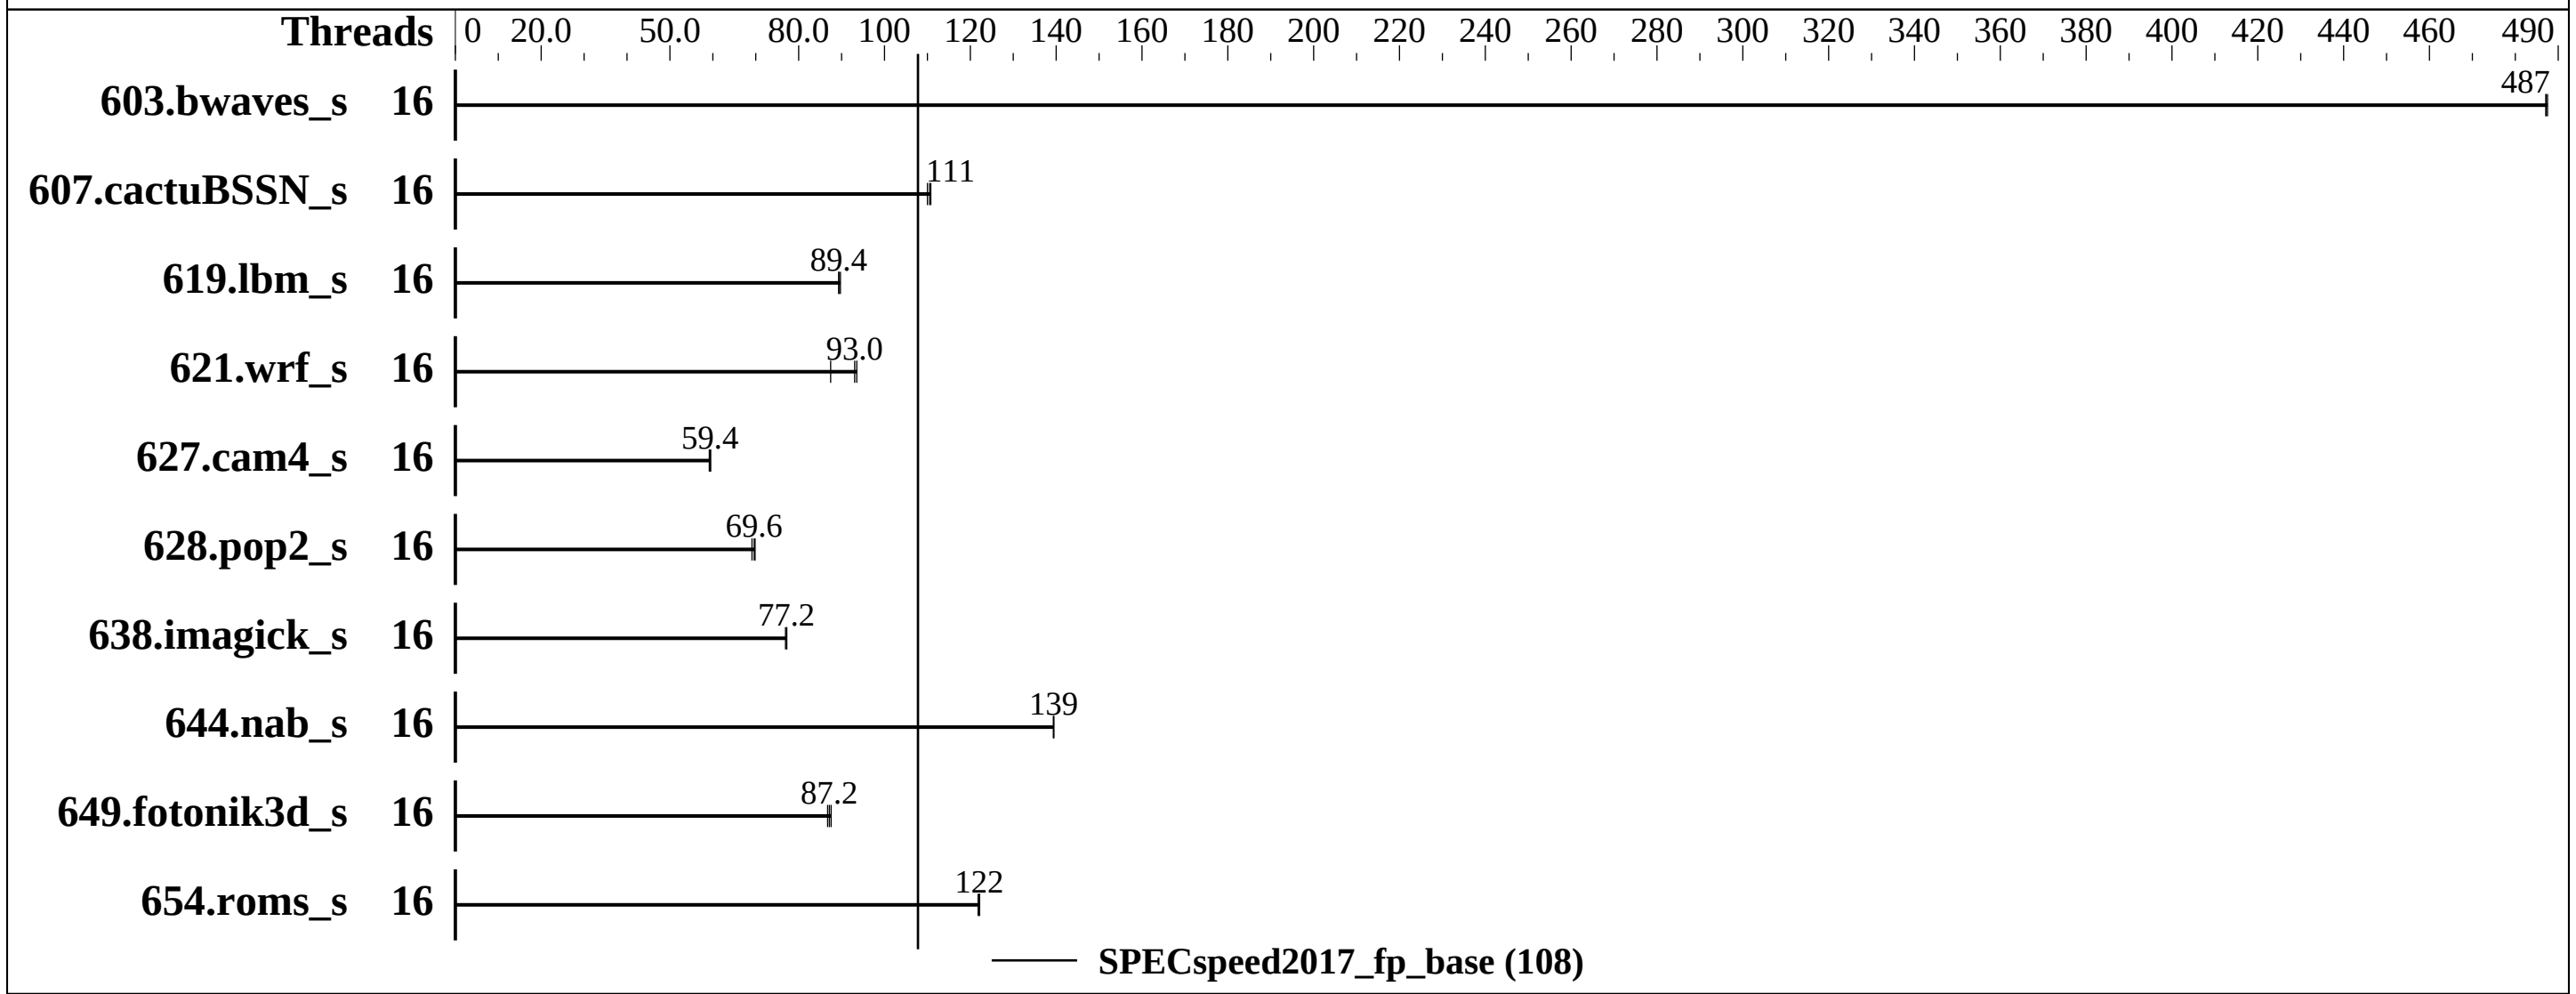

Hardware

CPU Name:	Intel Xeon Gold 6244
Max MHz.:	4400
Nominal:	3600
Enabled:	16 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	24.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 1200 GB SAS, 10000 RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	Yes
Firmware:	Version 6.36 Released Feb-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

Results Table

	Base							Peak						
Benchmark	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	**121**	**487**	121	488	121	487							
607.cactuBSSN_s	16	**151**	**111**	150	111	152	110							
619.lbm_s	16	**58.6**	**89.4**	58.4	89.7	58.6	89.3							
621.wrf_s	16	**142**	**93.0**	141	93.5	151	87.5							
627.cam4_s	16	149	59.5	**149**	**59.4**	150	59.2							
628.pop2_s	16	**171**	**69.6**	170	69.8	172	69.1							
638.imagick_s	16	188	76.9	**187**	**77.2**	187	77.2							
644.nab_s	16	**125**	**139**	125	139	125	139							
649.fotonik3d_s	16	105	86.7	**105**	**87.2**	104	87.6							
654.roms_s	16	129	122	**129**	**122**	129	122							

SPECspeed2017_fp_base = 108

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Power Policy Set to Load Balance
Hyper-Threading Set to Disable
```

(Continued on next page)

Platform Notes (Continued)

```
XPT Prefetch Set to Enabled
Sysinfo program /spec2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-xz5s Tue Dec  4 04:01:00 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
      2  "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 8
      siblings  : 8
      physical 0: cores 2 3 9 11 17 24 27
      physical 1: cores 4 8 17 18 19 24 25 27

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                16
     On-line CPU(s) list:   0-15
     Thread(s) per core:    1
     Core(s) per socket:    8
     Socket(s):             2
     NUMA node(s):          2
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
     Stepping:              6
     CPU MHz:               3600.000
     CPU max MHz:           4400.0000
     CPU min MHz:           1200.0000
     BogoMIPS:              7200.00
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              25344K
     NUMA node0 CPU(s):     0-7
     NUMA node1 CPU(s):     8-15
     Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

(Continued on next page)

Platform Notes (Continued)

```
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
      avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 25344 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0 1 2 3 4 5 6 7
   node 0 size: 385471 MB
   node 0 free: 382308 MB
   node 1 cpus: 8 9 10 11 12 13 14 15
   node 1 size: 386787 MB
   node 1 free: 380248 MB
   node distances:
   node   0   1
     0:  10  21
     1:  21  10

 From /proc/meminfo
    MemTotal:       790792768 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 4
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP4"
       VERSION_ID="12.4"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
       ID="sles"
       ANSI_COLOR="0;32"
```

(Continued on next page)

Platform Notes (Continued)

```
      CPE_NAME="cpe:/o:suse:sles:12:sp4"

 uname -a:
    Linux linux-xz5s 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Dec 3 19:29

 SPEC is set to: /spec2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      xfs   212G   73G  139G  35% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 6.36 02/15/2019
   Memory:
    24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-12-04 04:00:59-0500.
Report generated on 2019-05-15 13:25:12 by CPU2017 PS formatter v6067.
Originally published on 2019-05-14.