SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260L)

SPECrate2017_int_base = 1140

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

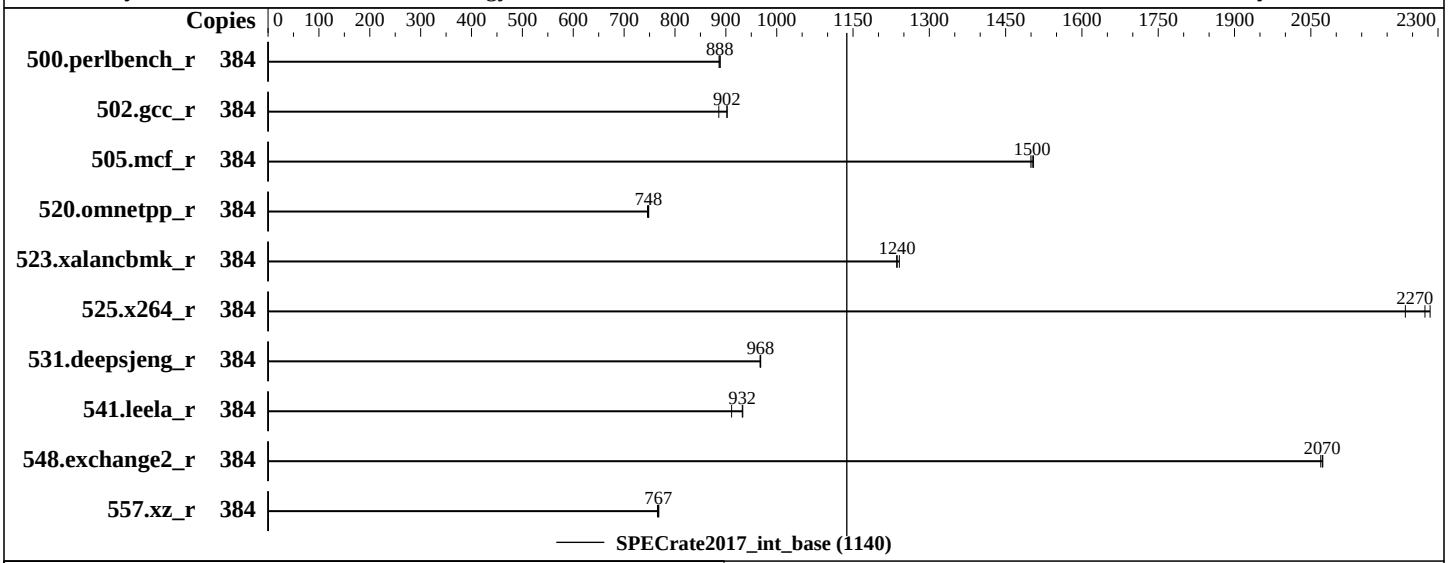

Hardware

CPU Name:	Intel Xeon Platinum 8260L
Max MHz.:	3900
Nominal:	2400
Enabled:	192 cores, 8 chips, 2 threads/core
Orderable:	2,3,4,6,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	960 GB tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version PSE121C 1.50 released Jan-2019
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260L)

SPECrate2017_int_base = 1140

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	689	887	688	889	**688**	**888**							
502.gcc_r	384	614	886	**603**	**902**	602	903							
505.mcf_r	384	**413**	**1500**	412	1500	414	1500							
520.omnetpp_r	384	675	746	**674**	**748**	673	748							
523.xalancbmk_r	384	327	1240	328	1240	**328**	**1240**							
525.x264_r	384	294	2280	**296**	**2270**	301	2240							
531.deepsjeng_r	384	455	967	**455**	**968**	454	968							
541.leela_r	384	**682**	**932**	698	911	681	933							
548.exchange2_r	384	485	2070	486	2070	**485**	**2070**							
557.xz_r	384	542	766	**540**	**767**	540	768							

SPECrate2017_int_base = 1140

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=960g tmpfs /home
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Trusted Execution Technology set to Enable
DCU Streamer Prefetcher set to Disable
SNC set to Enable
Patrol Scrub set to Disable
Stale AtoS set to Enable
 Sysinfo program /home/cpu2017-1.0.5-ic19.0u1/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on sles12sp4 Sun Apr 28 07:56:07 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8260L CPU @ 2.40GHz
       8  "physical id"s (chips)
       384 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
       physical 1: cores 0 1 2 3 4 5 6 8 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
       physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
       physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
       physical 6: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
       physical 7: cores 0 1 2 3 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 25 26 27 28 29

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
```

(Continued on next page)

Platform Notes (Continued)

```
CPU(s):                384
On-line CPU(s) list:   0-383
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):             8
NUMA node(s):          16
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8260L CPU @ 2.40GHz
Stepping:              6
CPU MHz:               2400.000
CPU max MHz:           3900.0000
CPU min MHz:           1000.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K
NUMA node0 CPU(s):     0-3,7-9,13-15,19,20,192-195,199-201,205-207,211,212
NUMA node1 CPU(s):     4-6,10-12,16-18,21-23,196-198,202-204,208-210,213-215
NUMA node2 CPU(s):     24-27,31,32,36-38,42-44,216-219,223,224,228-230,234-236
NUMA node3 CPU(s):     28-30,33-35,39-41,45-47,220-222,225-227,231-233,237-239
NUMA node4 CPU(s):     48-51,55-57,61-63,67,68,240-243,247-249,253-255,259,260
NUMA node5 CPU(s):     52-54,58-60,64-66,69-71,244-246,250-252,256-258,261-263
NUMA node6 CPU(s):     72-75,79-81,85-87,91,92,264-267,271-273,277-279,283,284
NUMA node7 CPU(s):     76-78,82-84,88-90,93-95,268-270,274-276,280-282,285-287
NUMA node8 CPU(s):     96-99,103-105,109-111,115,116,288-291,295-297,301-303,307,308
NUMA node9 CPU(s):
100-102,106-108,112-114,117-119,292-294,298-300,304-306,309-311
NUMA node10 CPU(s):
120-123,127-129,133-135,139,140,312-315,319-321,325-327,331,332
NUMA node11 CPU(s):
124-126,130-132,136-138,141-143,316-318,322-324,328-330,333-335
NUMA node12 CPU(s):
144-147,151,152,156-158,162-164,336-339,343,344,348-350,354-356
NUMA node13 CPU(s):
148-150,153-155,159-161,165-167,340-342,345-347,351-353,357-359
NUMA node14 CPU(s):
168-171,174-176,180-182,187,188,360-363,366-368,372-374,379,380
NUMA node15 CPU(s):
172,173,177-179,183-186,189-191,364,365,369-371,375-378,381-383
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
```

(Continued on next page)

Platform Notes (Continued)

```
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
      mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
      clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
      avx512_vnni flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 36608 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 192 193 194 195 199 200 201 205 206 207 211
    212
    node 0 size: 193120 MB
    node 0 free: 192297 MB
    node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 196 197 198 202 203 204 208 209 210 213
    214 215
    node 1 size: 193530 MB
    node 1 free: 192854 MB
    node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 216 217 218 219 223 224 228 229 230
    234 235 236
    node 2 size: 193530 MB
    node 2 free: 192894 MB
    node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 220 221 222 225 226 227 231 232 233
    237 238 239
    node 3 size: 193530 MB
    node 3 free: 192892 MB
    node 4 cpus: 48 49 50 51 55 56 57 61 62 63 67 68 240 241 242 243 247 248 249 253 254
    255 259 260
    node 4 size: 193530 MB
    node 4 free: 179914 MB
    node 5 cpus: 52 53 54 58 59 60 64 65 66 69 70 71 244 245 246 250 251 252 256 257 258
    261 262 263
    node 5 size: 193530 MB
    node 5 free: 192904 MB
    node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 264 265 266 267 271 272 273 277 278
    279 283 284
    node 6 size: 193530 MB
    node 6 free: 192902 MB
    node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 268 269 270 274 275 276 280 281 282
    285 286 287
    node 7 size: 193530 MB
    node 7 free: 192901 MB
    node 8 cpus: 96 97 98 99 103 104 105 109 110 111 115 116 288 289 290 291 295 296 297
```

(Continued on next page)

Platform Notes (Continued)

```
301 302 303 307 308
node 8 size: 193530 MB
node 8 free: 192894 MB
node 9 cpus: 100 101 102 106 107 108 112 113 114 117 118 119 292 293 294 298 299 300
304 305 306 309 310 311
node 9 size: 193530 MB
node 9 free: 192902 MB
node 10 cpus: 120 121 122 123 127 128 129 133 134 135 139 140 312 313 314 315 319 320
321 325 326 327 331 332
node 10 size: 193530 MB
node 10 free: 192898 MB
node 11 cpus: 124 125 126 130 131 132 136 137 138 141 142 143 316 317 318 322 323 324
328 329 330 333 334 335
node 11 size: 193530 MB
node 11 free: 192899 MB
node 12 cpus: 144 145 146 147 151 152 156 157 158 162 163 164 336 337 338 339 343 344
348 349 350 354 355 356
node 12 size: 193530 MB
node 12 free: 192891 MB
node 13 cpus: 148 149 150 153 154 155 159 160 161 165 166 167 340 341 342 345 346 347
351 352 353 357 358 359
node 13 size: 193530 MB
node 13 free: 192899 MB
node 14 cpus: 168 169 170 171 174 175 176 180 181 182 187 188 360 361 362 363 366 367
368 372 373 374 379 380
node 14 size: 193530 MB
node 14 free: 192896 MB
node 15 cpus: 172 173 177 178 179 183 184 185 186 189 190 191 364 365 369 370 371 375
376 377 378 381 382 383
node 15 size: 193499 MB
node 15 free: 192872 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  21  21  31  31  21  21  21  21  31  31  31  31  31  31
  1:  11  10  21  21  31  31  21  21  21  21  31  31  31  31  31  31
  2:  21  21  10  11  21  21  31  31  31  31  21  21  31  31  31  31
  3:  21  21  11  10  21  21  31  31  31  31  21  21  31  31  31  31
  4:  31  31  21  21  10  11  21  21  31  31  31  31  21  21  31  31
  5:  31  31  21  21  11  10  21  21  31  31  31  31  21  21  31  31
  6:  21  21  31  31  21  21  10  11  31  31  31  31  31  31  21  21
  7:  21  21  31  31  21  21  11  10  31  31  31  31  31  31  21  21
  8:  21  21  31  31  31  31  31  31  10  11  21  21  21  21  31  31
  9:  21  21  31  31  31  31  31  31  11  10  21  21  21  21  31  31
 10:  31  31  21  21  31  31  31  31  21  21  10  11  31  31  21  21
 11:  31  31  21  21  31  31  31  31  21  21  11  10  31  31  21  21
 12:  31  31  31  31  21  21  31  31  21  21  31  31  10  11  21  21
 13:  31  31  31  31  21  21  31  31  21  21  31  31  11  10  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
    14:  31  31  31  31  31  31  21  21  31  31  21  21  21  21  10  11
    15:  31  31  31  31  31  31  21  21  31  31  21  21  21  21  11  10

  From /proc/meminfo
     MemTotal:       3170352920 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 4
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP4"
        VERSION_ID="12.4"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp4"

  uname -a:
     Linux sles12sp4 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2017-5754 (Meltdown):          Not affected
  CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
  IBPB, IBRS_FW

  run-level 3 Apr 28 03:23

  SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1
     Filesystem     Type   Size  Used Avail Use% Mounted on
     tmpfs          tmpfs  960G  8.3G  952G   1% /home

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS Lenovo -[PSE121C-1.50]- 01/16/2019
    Memory:
```

(Continued on next page)

Platform Notes (Continued)

```
    96x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
      557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
```
icc -m64 -std=c11
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-27 19:56:07-0400.
Report generated on 2019-05-15 13:39:02 by CPU2017 PS formatter v6067.
Originally published on 2019-05-14.