



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_base = 993

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

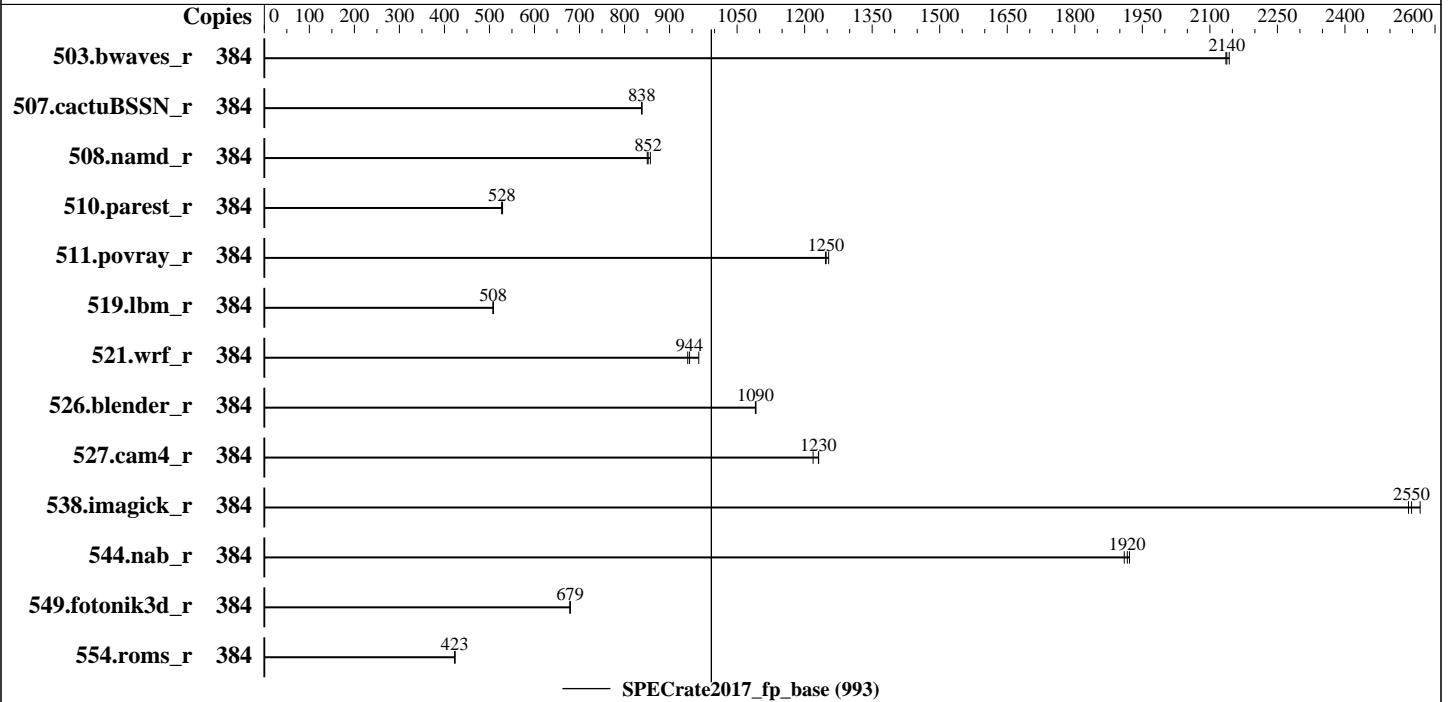

Hardware

CPU Name: Intel Xeon Platinum 8260Y
 Max MHz.: 3900
 Nominal: 2400
 Enabled: 192 cores, 8 chips, 2 threads/core
 Orderable: 2,3,4,6,8 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 960 GB tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.0.117 of Intel
 C/C++
 Compiler for Linux;
 Fortran: Version 19.0.0.117 of
 Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version PSE121C 1.50 released Jan-2019
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 993

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	1797	2140	<u>1801</u>	<u>2140</u>	1803	2140							
507.cactuBSSN_r	384	580	838	580	838	<u>580</u>	<u>838</u>							
508.namd_r	384	426	857	429	850	<u>428</u>	<u>852</u>							
510.parest_r	384	1898	529	1906	527	<u>1902</u>	<u>528</u>							
511.povray_r	384	715	1250	<u>719</u>	<u>1250</u>	719	1250							
519.lbm_r	384	796	508	<u>796</u>	<u>508</u>	796	508							
521.wrf_r	384	915	940	<u>911</u>	<u>944</u>	891	965							
526.blender_r	384	<u>536</u>	<u>1090</u>	536	1090	536	1090							
527.cam4_r	384	<u>546</u>	<u>1230</u>	551	1220	546	1230							
538.imagick_r	384	<u>375</u>	<u>2550</u>	372	2570	376	2540							
544.nab_r	384	338	1910	336	1920	<u>337</u>	<u>1920</u>							
549.fotonik3d_r	384	2203	679	<u>2203</u>	<u>679</u>	2204	679							
554.roms_r	384	1440	424	<u>1443</u>	<u>423</u>	1444	423							

SPECrate2017_fp_base = 993

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=960g tmpfs /home
Process tuning setting:
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 993

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

General Notes (Continued)

Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Choose Operating Mode set to Custom Mode

MONITOR/MWAIT set to Enable

SNC set to Enable

Patrol Scrub set to Disable

Stale AtoS set to Enable

LLC dead line alloc set to Disable

sysinfo program /home/cpu2017-1.0.5-ic19/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on sles12sp4 Thu Apr 18 04:41:25 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8260Y CPU @ 2.40GHz

8 "physical id"s (chips)

384 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 6 8 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 993

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

```

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 5: cores 0 1 2 3 4 5 6 8 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 6: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 384
On-line CPU(s) list:   0-383
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              8
NUMA node(s):          16
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8260Y CPU @ 2.40GHz
Stepping:               7
CPU MHz:                2400.000
CPU max MHz:            3900.0000
CPU min MHz:            1000.0000
BogoMIPS:               4800.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               36608K
NUMA node0 CPU(s):     0-3,7-9,13-15,19,20,192-195,199-201,205-207,211,212
NUMA node1 CPU(s):     4-6,10-12,16-18,21-23,196-198,202-204,208-210,213-215
NUMA node2 CPU(s):     24-27,31,32,36-38,42-44,216-219,223,224,228-230,234-236
NUMA node3 CPU(s):     28-30,33-35,39-41,45-47,220-222,225-227,231-233,237-239
NUMA node4 CPU(s):     48-51,55,56,60-62,66-68,240-243,247,248,252-254,258-260
NUMA node5 CPU(s):     52-54,57-59,63-65,69-71,244-246,249-251,255-257,261-263
NUMA node6 CPU(s):     72-75,79-81,85-87,91,92,264-267,271-273,277-279,283,284
NUMA node7 CPU(s):     76-78,82-84,88-90,93-95,268-270,274-276,280-282,285-287
NUMA node8 CPU(s):     96-99,103-105,109-111,115,116,288-291,295-297,301-303,307,308
NUMA node9 CPU(s):     100-102,106-108,112-114,117-119,292-294,298-300,304-306,309-311
NUMA node10 CPU(s):    120-123,127,128,132-134,138-140,312-315,319,320,324-326,330-332
NUMA node11 CPU(s):    124-126,129-131,135-137,141-143,316-318,321-323,327-329,333-335
NUMA node12 CPU(s):    144-147,151,152,156-158,162-164,336-339,343,344,348-350,354-356

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 993

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

NUMA node13 CPU(s):
148-150,153-155,159-161,165-167,340-342,345-347,351-353,357-359

NUMA node14 CPU(s):
168-171,175-177,181-183,187,188,360-363,367-369,373-375,379,380

NUMA node15 CPU(s):
172-174,178-180,184-186,189-191,364-366,370-372,376-378,381-383

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 192 193 194 195 199 200 201 205 206 207 211 212
node 0 size: 193119 MB
node 0 free: 175988 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 196 197 198 202 203 204 208 209 210 213 214 215
node 1 size: 193530 MB
node 1 free: 193285 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 216 217 218 219 223 224 228 229 230 234 235 236
node 2 size: 193530 MB
node 2 free: 193328 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 220 221 222 225 226 227 231 232 233 237 238 239
node 3 size: 193530 MB
node 3 free: 193330 MB
node 4 cpus: 48 49 50 51 55 56 60 61 62 66 67 68 240 241 242 243 247 248 252 253 254 258 259 260
node 4 size: 193530 MB
node 4 free: 193184 MB
node 5 cpus: 52 53 54 57 58 59 63 64 65 69 70 71 244 245 246 249 250 251 255 256 257 261 262 263
node 5 size: 193530 MB
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_base = 993

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Platform Notes (Continued)

```

node 5 free: 193287 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 264 265 266 267 271 272 273 277 278
279 283 284
node 6 size: 193530 MB
node 6 free: 193160 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 268 269 270 274 275 276 280 281 282
285 286 287
node 7 size: 193530 MB
node 7 free: 193270 MB
node 8 cpus: 96 97 98 99 103 104 105 109 110 111 115 116 288 289 290 291 295 296 297
301 302 303 307 308
node 8 size: 193530 MB
node 8 free: 193345 MB
node 9 cpus: 100 101 102 106 107 108 112 113 114 117 118 119 292 293 294 298 299 300
304 305 306 309 310 311
node 9 size: 193501 MB
node 9 free: 193334 MB
node 10 cpus: 120 121 122 123 127 128 132 133 134 138 139 140 312 313 314 315 319 320
324 325 326 330 331 332
node 10 size: 193530 MB
node 10 free: 193374 MB
node 11 cpus: 124 125 126 129 130 131 135 136 137 141 142 143 316 317 318 321 322 323
327 328 329 333 334 335
node 11 size: 193530 MB
node 11 free: 193371 MB
node 12 cpus: 144 145 146 147 151 152 156 157 158 162 163 164 336 337 338 339 343 344
348 349 350 354 355 356
node 12 size: 193530 MB
node 12 free: 193320 MB
node 13 cpus: 148 149 150 153 154 155 159 160 161 165 166 167 340 341 342 345 346 347
351 352 353 357 358 359
node 13 size: 193530 MB
node 13 free: 193335 MB
node 14 cpus: 168 169 170 171 175 176 177 181 182 183 187 188 360 361 362 363 367 368
369 373 374 375 379 380
node 14 size: 193530 MB
node 14 free: 193348 MB
node 15 cpus: 172 173 174 178 179 180 184 185 186 189 190 191 364 365 366 370 371 372
376 377 378 381 382 383
node 15 size: 193527 MB
node 15 free: 193332 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
0: 10 11 21 21 31 31 21 21 21 21 31 31 31 31 31 31
1: 11 10 21 21 31 31 21 21 21 21 31 31 31 31 31 31
2: 21 21 10 11 21 21 31 31 31 31 21 21 31 31 31 31
3: 21 21 11 10 21 21 31 31 31 31 21 21 31 31 31 31

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 993

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

```

4: 31 31 21 21 10 11 21 21 31 31 31 31 21 21 31 31
5: 31 31 21 21 11 10 21 21 31 31 31 31 21 21 31 31
6: 21 21 31 31 21 21 10 11 31 31 31 31 31 31 21 21
7: 21 21 31 31 21 21 11 10 31 31 31 31 31 31 21 21
8: 21 21 31 31 31 31 31 31 10 11 21 21 21 21 31 31
9: 21 21 31 31 31 31 31 31 11 10 21 21 21 21 31 31
10: 31 31 21 21 31 31 31 31 21 21 10 11 31 31 21 21
11: 31 31 21 21 31 31 31 31 21 21 11 10 31 31 21 21
12: 31 31 31 31 21 21 31 31 21 21 31 31 10 11 21 21
13: 31 31 31 31 21 21 31 31 21 21 31 31 11 10 21 21
14: 31 31 31 31 31 31 21 21 31 31 21 21 21 21 10 11
15: 31 31 31 31 31 31 21 21 31 31 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      3170352164 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

```

uname -a:

```

Linux sles12sp4 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

```

run-level 3 Apr 18 04:37

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 993

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.0.5-ic19

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	960G	11G	950G	2%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[PSE121C-1.50]- 01/16/2019

Memory:

96x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 993

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 993

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.40 GHz, Intel Xeon Platinum 8260Y)

SPECrate2017_fp_base = 993

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-17 16:41:24-0400.

Report generated on 2019-05-15 13:41:02 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.