



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

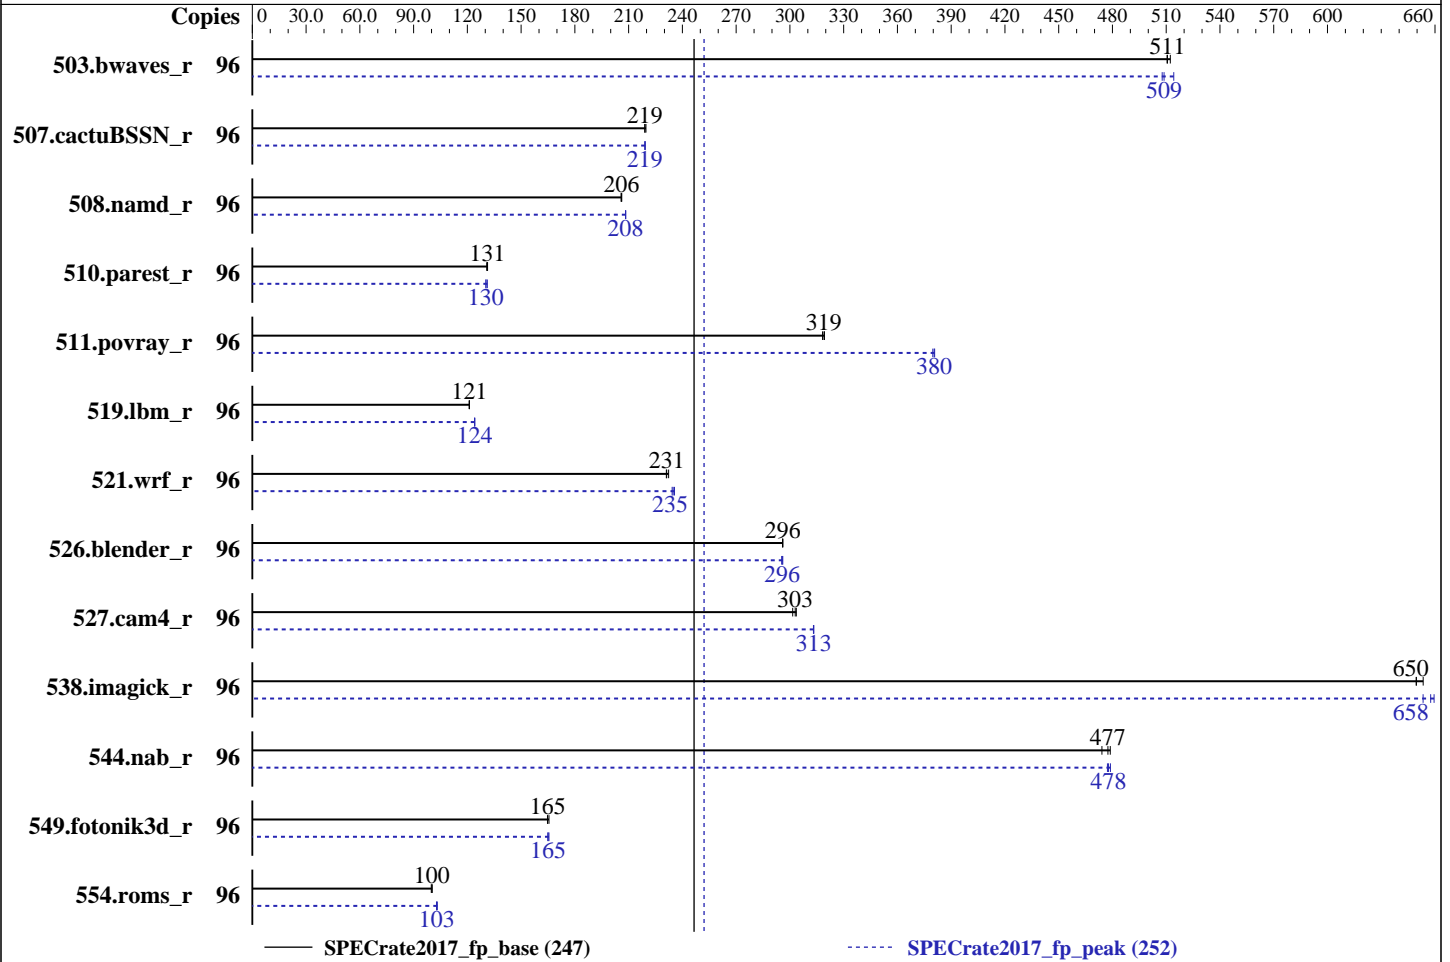

### Hardware

CPU Name: Intel Xeon Platinum 8260  
 Max MHz.: 3900  
 Nominal: 2400  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15.0-45-generic  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Version 2.1.6 released Mar-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1886	510	<b>1885</b>	<b>511</b>	1879	512	96	1872	514	<b>1892</b>	<b>509</b>	1896	508
507.cactuBSSN_r	96	553	220	<b>555</b>	<b>219</b>	555	219	96	<b>555</b>	<b>219</b>	554	219	555	219
508.namd_r	96	443	206	442	206	<b>443</b>	<b>206</b>	96	438	208	<b>438</b>	<b>208</b>	438	208
510.parest_r	96	<b>1913</b>	<b>131</b>	1913	131	1920	131	96	<b>1926</b>	<b>130</b>	1926	130	1915	131
511.povray_r	96	704	318	702	319	<b>703</b>	<b>319</b>	96	<b>589</b>	<b>380</b>	589	381	590	380
519.lbm_r	96	835	121	836	121	<b>835</b>	<b>121</b>	96	815	124	816	124	<b>815</b>	<b>124</b>
521.wrf_r	96	<b>930</b>	<b>231</b>	926	232	931	231	96	913	236	918	234	<b>916</b>	<b>235</b>
526.blender_r	96	494	296	<b>494</b>	<b>296</b>	494	296	96	495	295	<b>494</b>	<b>296</b>	494	296
527.cam4_r	96	557	302	<b>554</b>	<b>303</b>	553	304	96	<b>536</b>	<b>313</b>	536	313	536	313
538.imagick_r	96	<b>368</b>	<b>650</b>	365	653	368	650	96	362	659	<b>363</b>	<b>658</b>	365	653
544.nab_r	96	341	474	<b>338</b>	<b>477</b>	337	479	96	337	479	339	477	<b>338</b>	<b>478</b>
549.fotonik3d_r	96	2271	165	<b>2270</b>	<b>165</b>	2260	166	96	2269	165	<b>2266</b>	<b>165</b>	2260	166
554.roms_r	96	1520	100	1528	99.9	<b>1523</b>	<b>100</b>	96	<b>1481</b>	<b>103</b>	1484	103	1478	103

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS settings:  
ADDDC setting disabled  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
DCU Streamer Prefetcher enabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on intel-sut Tue Apr 2 06:40:24 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz  
2 "physical id"s (chips)  
96 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 24  
siblings : 48  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 96

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-95
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
Stepping: 6
CPU MHz: 2720.320
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s):
0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
NUMA node1 CPU(s):
1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
NUMA node2 CPU(s):
2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
NUMA node3 CPU(s):
3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx
smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku
ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92
node 0 size: 95166 MB
node 0 free: 94542 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

```

node 1 size: 96763 MB
node 1 free: 96187 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94
node 2 size: 96742 MB
node 2 free: 96228 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95
node 3 size: 96762 MB
node 3 free: 96063 MB
node distances:
node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10

```

```

From /proc/meminfo
MemTotal:          394684328 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

```

```

uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB

```

run-level 5 Apr 1 21:49

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	20G	398G	5%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.1.6 03/04/2019

Memory:

```

11x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
4x Not Specified Not Specified

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

```

```

=====
CC 519.lbm_r(peak)
-----

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

```

```

=====
CXXC 508.namd_r(base) 510.parest_r(base, peak)
-----

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

```

```

=====
CXXC 508.namd_r(peak)
-----

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Compiler Version Notes (Continued)

Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(base) 526.blender\_r(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

=====  
FC 554.roms\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Peak Optimization Flags (Continued)

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

510.parest\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

526.blender\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8260, 2.40GHz)

SPECrate2017\_fp\_base = 247

SPECrate2017\_fp\_peak = 252

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-02 02:40:23-0400.

Report generated on 2019-05-29 15:02:52 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-29.