SPEC® CPU2017 Floating Point Speed Result

Lenovo Global Technology

ThinkSystem SR850
(2.50 GHz, Intel Xeon Gold 5215M)

SPECspeed2017_fp_base = 130

SPECspeed2017_fp_peak = Not Run

CPU2017 License:	9017	**Test Date:**	May-2019
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Apr-2019
Tested by:	Lenovo Global Technology	**Software Availability:**	Dec-2018

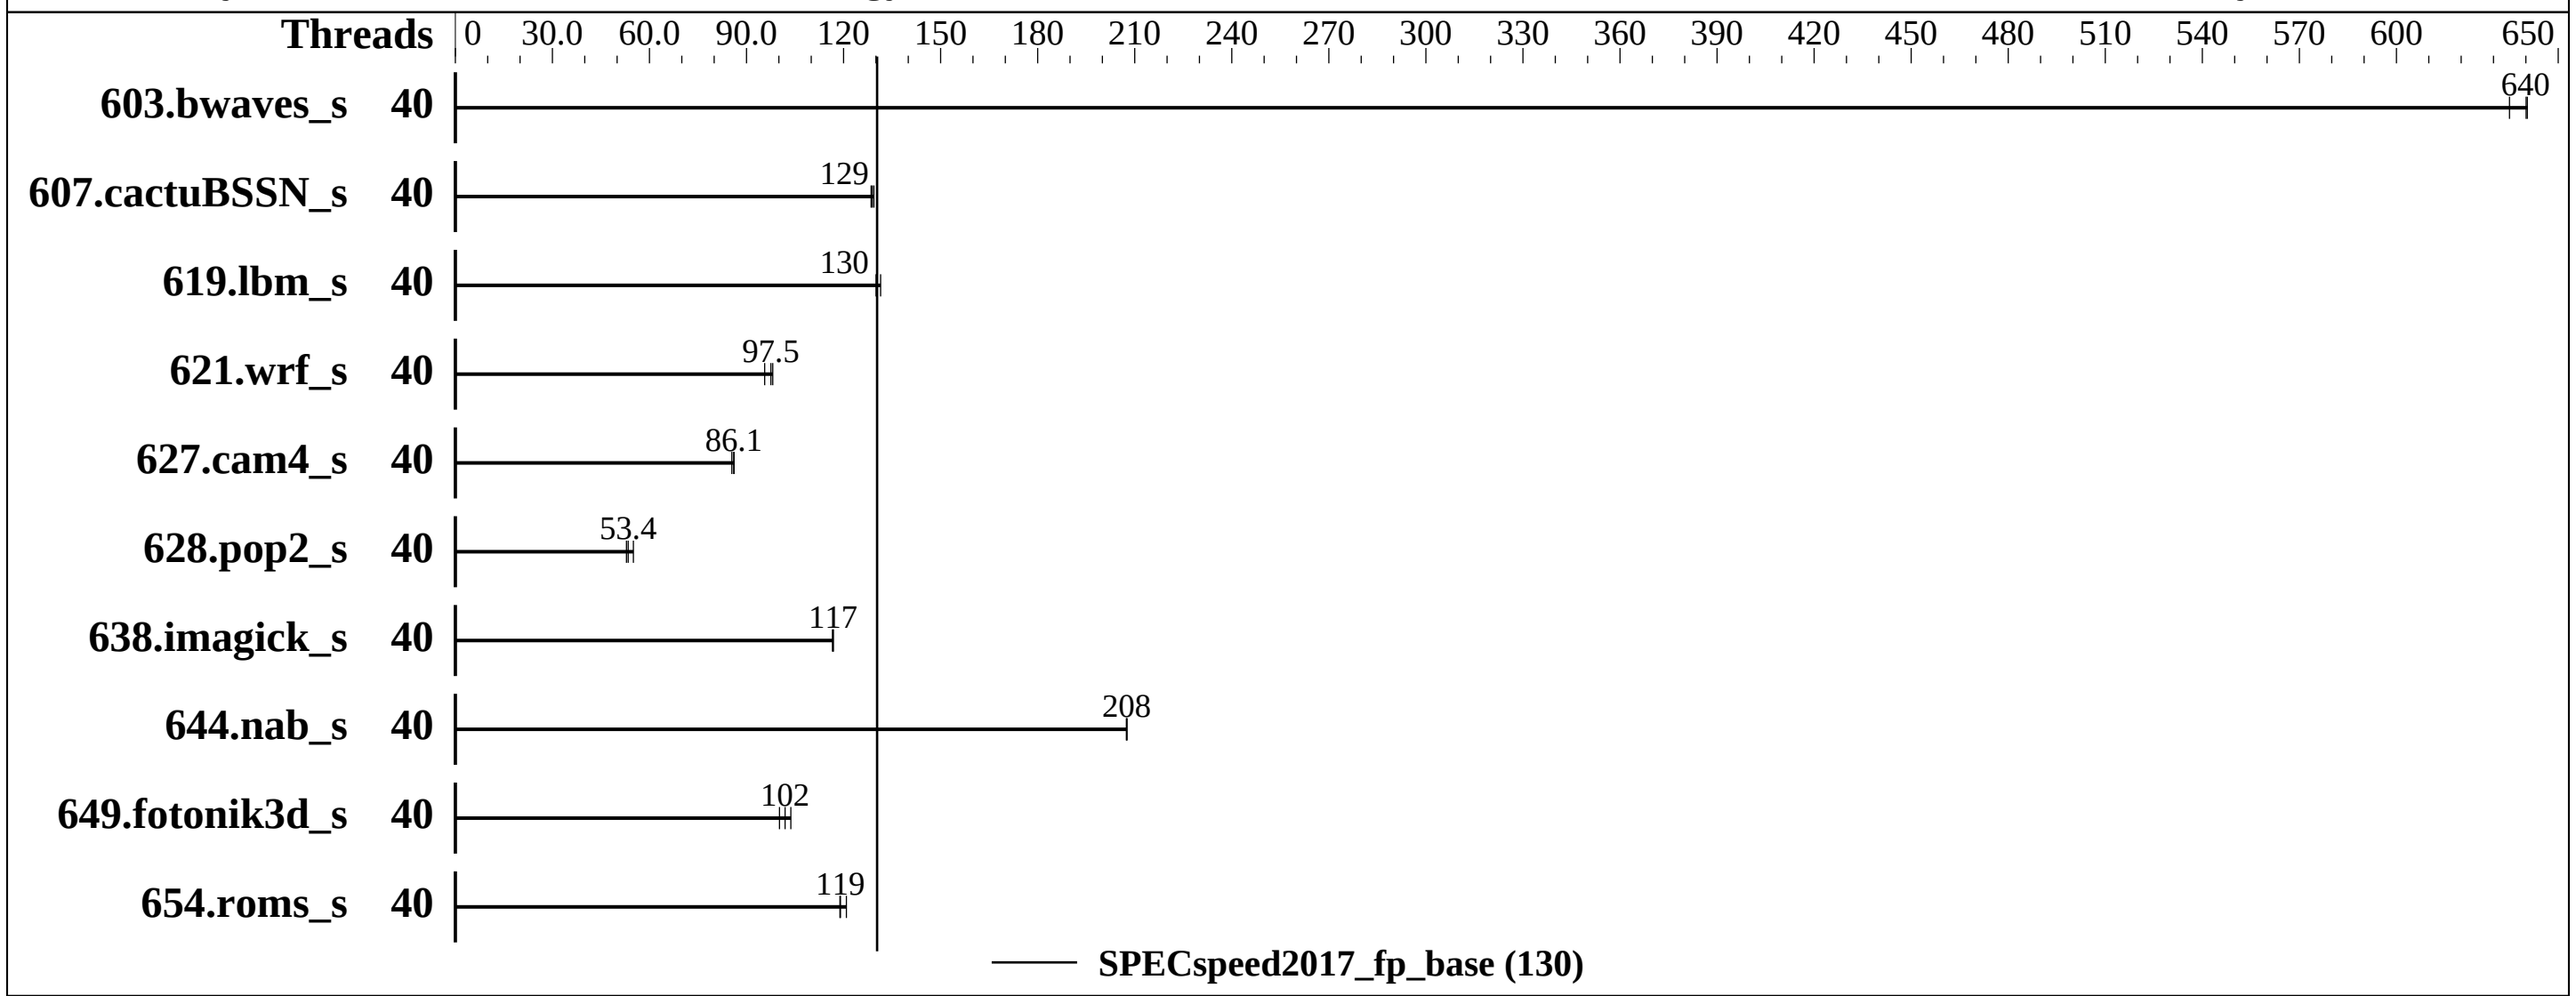

Hardware

CPU Name:	Intel Xeon Gold 5215M
Max MHz.:	3400
Nominal:	2500
Enabled:	40 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	13.75 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	800 GB tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	Yes
Firmware:	Lenovo BIOS Version TEE135T 2.10 released Mar-2019
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

Results Table

Benchmark	Base Threads	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Peak Threads	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio
603.bwaves_s	40	92.1	640	92.9	635	**92.2**	**640**							
607.cactuBSSN_s	40	**129**	**129**	129	129	130	129							
619.lbm_s	40	40.3	130	39.8	131	**40.2**	**130**							
621.wrf_s	40	135	98.1	**136**	**97.5**	138	95.6							
627.cam4_s	40	103	86.2	104	85.5	**103**	**86.1**							
628.pop2_s	40	224	52.9	**222**	**53.4**	216	55.0							
638.imagick_s	40	**124**	**117**	123	117	124	117							
644.nab_s	40	84.2	208	**84.2**	**208**	84.2	207							
649.fotonik3d_s	40	91.0	100	**89.4**	**102**	87.9	104							
654.roms_s	40	132	119	130	121	**132**	**119**							

SPECspeed2017_fp_base = **130**

SPECspeed2017_fp_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
 echo 50000     > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
 echo 240000000 > /proc/sys/kernel/sched_latency_ns
 echo 5000000   > /proc/sys/kernel/sched_migration_cost_ns
 echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
 echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
```


(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Choose Operating Mode set to Custom Mode
C-states set to Legacy
Trusted Execution Technology set to Enable
 Sysinfo program /home/cpu2017-1.0.5-ic19.0u1/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-hxhl Tue May  7 14:27:16 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5215M CPU @ 2.50GHz
       4  "physical id"s (chips)
       80 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 10
       siblings  : 20
       physical 0: cores 0 1 2 3 4 8 9 10 11 12
       physical 1: cores 0 1 2 3 4 8 9 10 11 12
       physical 2: cores 0 1 2 3 4 8 9 10 11 12
       physical 3: cores 0 1 2 3 4 8 9 10 11 12

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                80
      On-line CPU(s) list:   0-79
      Thread(s) per core:    2
      Core(s) per socket:    10
      Socket(s):             4
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5215M CPU @ 2.50GHz
      Stepping:              6
      CPU MHz:               2500.000
      CPU max MHz:           3400.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5000.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              14080K
      NUMA node0 CPU(s):     0-9,40-49
      NUMA node1 CPU(s):     10-19,50-59
      NUMA node2 CPU(s):     20-29,60-69
      NUMA node3 CPU(s):     30-39,70-79
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
      avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 14080 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 40 41 42 43 44 45 46 47 48 49
   node 0 size: 386666 MB
   node 0 free: 377043 MB
   node 1 cpus: 10 11 12 13 14 15 16 17 18 19 50 51 52 53 54 55 56 57 58 59
   node 1 size: 387057 MB
   node 1 free: 383748 MB
   node 2 cpus: 20 21 22 23 24 25 26 27 28 29 60 61 62 63 64 65 66 67 68 69
   node 2 size: 387028 MB
   node 2 free: 386125 MB
   node 3 cpus: 30 31 32 33 34 35 36 37 38 39 70 71 72 73 74 75 76 77 78 79
   node 3 size: 387055 MB
   node 3 free: 386858 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node distances:
  node   0   1   2   3
    0:  10  21  21  31
    1:  21  10  31  21
    2:  21  31  10  21
    3:  31  21  21  10

From /proc/meminfo
   MemTotal:       1584955332 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 4
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP4"
      VERSION_ID="12.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
   Linux linux-hxhl 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 May 7 11:29

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  800G  8.3G  792G   2% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
```

(Continued on next page)

Platform Notes (Continued)

```
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[TEE135T-2.10]- 03/21/2019
  Memory:
   48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP`

Fortran benchmarks:
`-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml

Tested with SPEC CPU2017 v1.0.5 on 2019-05-07 02:27:15-0400.
Report generated on 2019-05-29 16:22:48 by CPU2017 PS formatter v6067.
Originally published on 2019-05-29.