SPEC® CPU2017 Floating Point Speed Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML110 Gen10
(2.10 GHz, Intel Xeon Silver 4216)

SPECspeed2017_fp_base = 68.4

SPECspeed2017_fp_peak = Not Run

CPU2017 License:	3	**Test Date:**	May-2019
Test Sponsor:	HPE	**Hardware Availability:**	Apr-2019
Tested by:	HPE	**Software Availability:**	Feb-2019

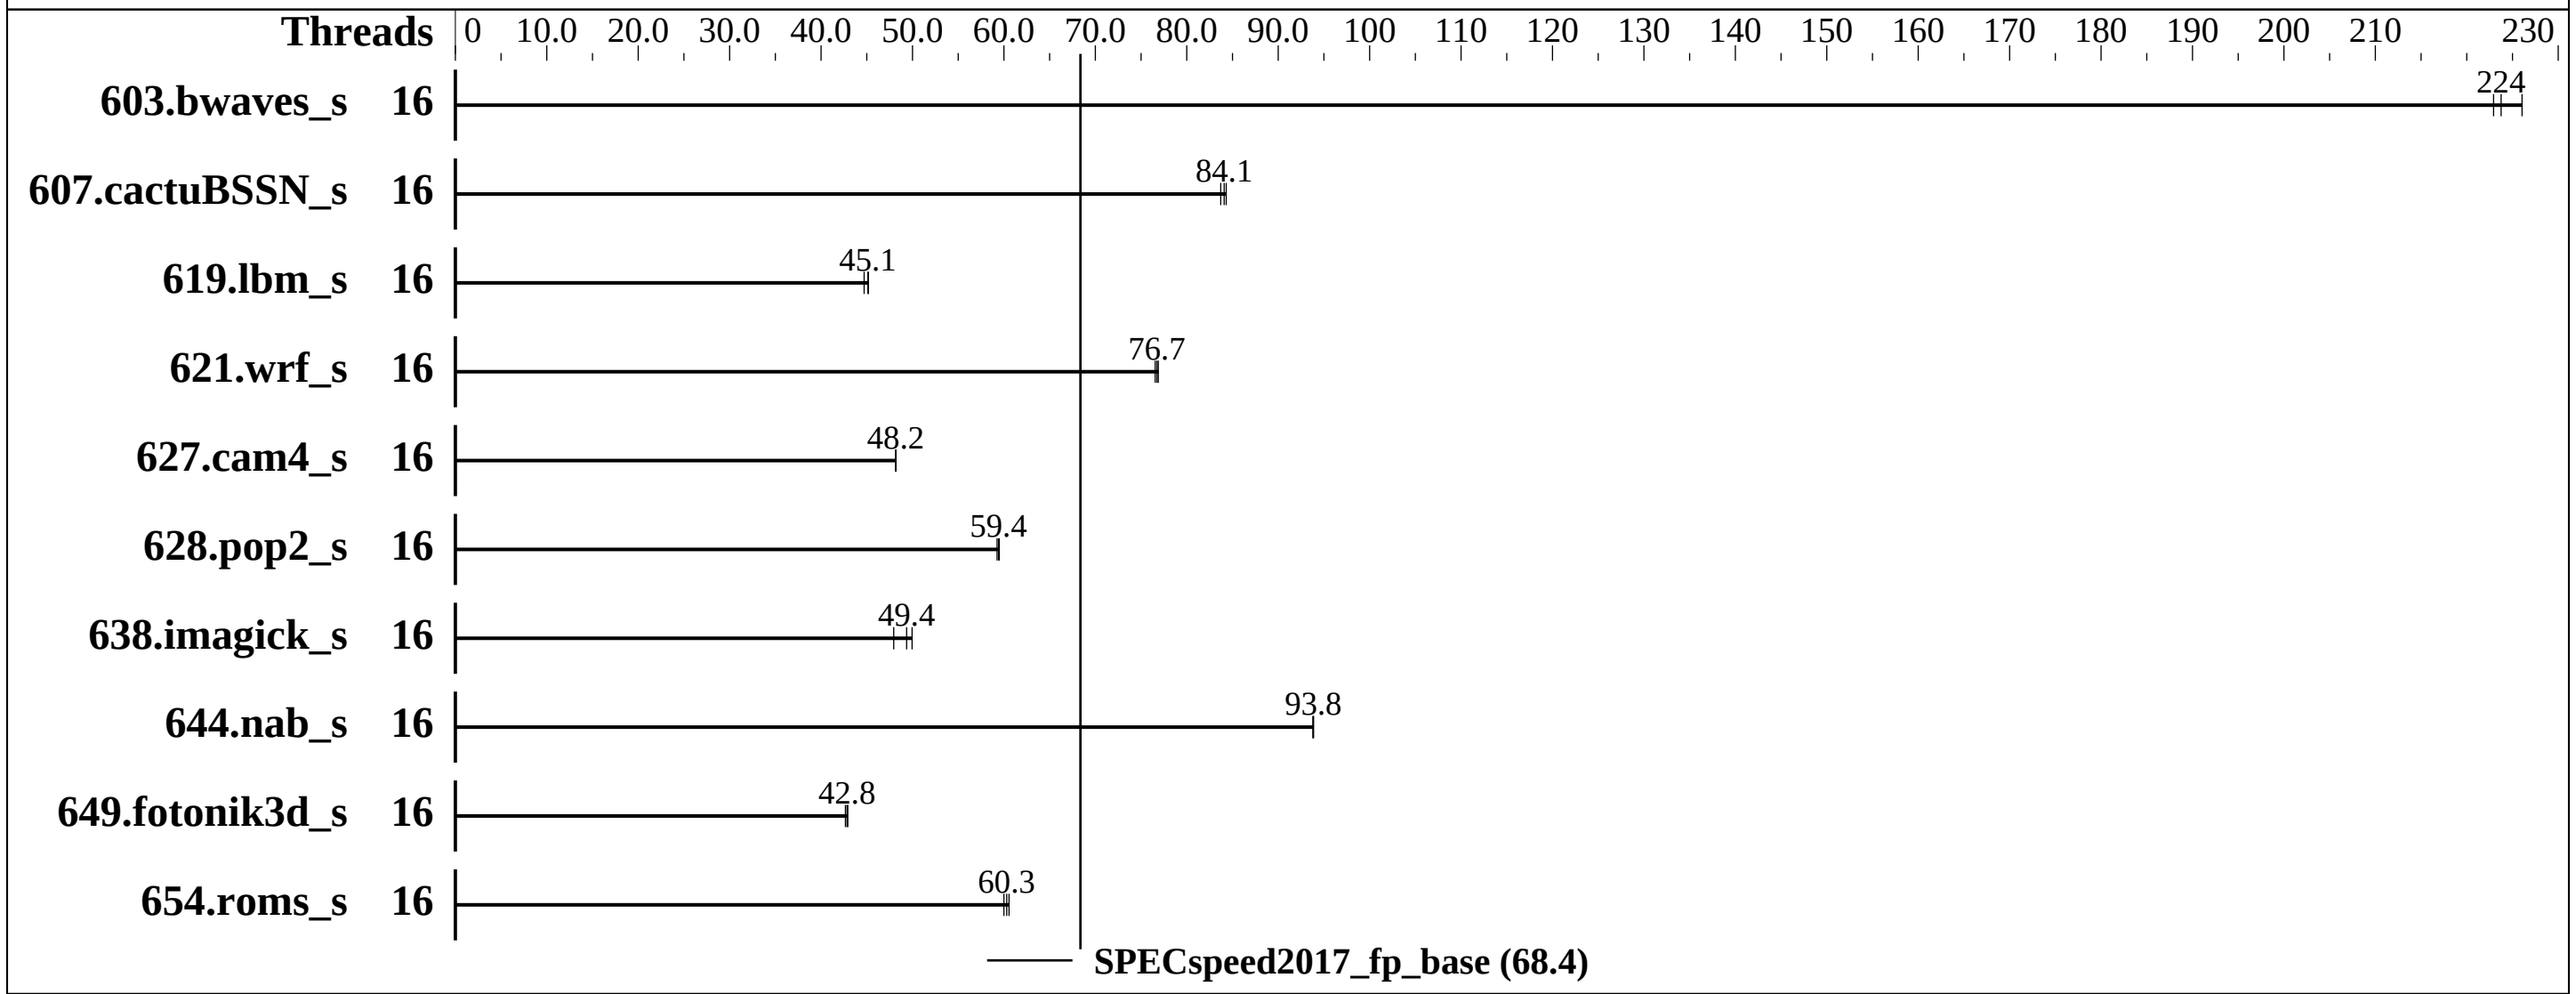

Hardware

CPU Name:	Intel Xeon Silver 4216
Max MHz.:	3200
Nominal:	2100
Enabled:	16 cores, 1 chip
Orderable:	1 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	96 GB (6 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
Storage:	1 x 400 GB SAS SSD, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 (x86_64) Kernel 4.12.14-23-default
Compiler:	C/C++: Version 19.0.2.187 of Intel C/C++ Compiler Build 20190117 for Linux; Fortran: Version 19.0.2.187 of Intel Fortran Compiler Build 20190117 for Linux
Parallel:	Yes
Firmware:	HPE BIOS Version U33 02/02/2019 released Apr-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	261	226	**264**	**224**	265	223							
607.cactuBSSN_s	16	198	84.3	**198**	**84.1**	199	83.7							
619.lbm_s	16	117	44.7	**116**	**45.1**	116	45.2							
621.wrf_s	16	**172**	**76.7**	172	76.9	173	76.5							
627.cam4_s	16	184	48.2	184	48.2	**184**	**48.2**							
628.pop2_s	16	200	59.5	**200**	**59.4**	200	59.3							
638.imagick_s	16	**292**	**49.4**	301	47.9	289	50.0							
644.nab_s	16	186	93.9	186	93.8	**186**	**93.8**							
649.fotonik3d_s	16	214	42.7	212	42.9	**213**	**42.8**							
654.roms_s	16	262	60.0	**261**	**60.3**	260	60.6							

SPECspeed2017_fp_base = 68.4

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017_u2/lib/ia32:/home/cpu2017_u2/lib/intel64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration:
 Hyper-Threading set to Disabled
 Thermal Configuration set to Maximum Cooling
```

(Continued on next page)

Platform Notes (Continued)

```
Memory Patrol Scrubbing set to Disabled
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Workload Profile set to General Peak Frequency Compute
 Energy/Performance Bias set to Balanced Power
Workload Profile set to Custom
 Numa Group Size Optimization set to Flat
Sysinfo program /home/cpu2017_u2/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on ml110-sles15 Wed May  1 17:31:52 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Silver 4216 CPU @ 2.10GHz
      1  "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 16
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              16
     On-line CPU(s) list: 0-15
     Thread(s) per core:  1
     Core(s) per socket:  16
     Socket(s):           1
     NUMA node(s):        1
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               85
     Model name:          Intel(R) Xeon(R) Silver 4216 CPU @ 2.10GHz
     Stepping:            6
     CPU MHz:             2100.000
     BogoMIPS:            4200.00
     Virtualization:      VT-x
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            1024K
     L3 cache:            22528K
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node0 CPU(s):   0-15
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
      sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

 /proc/cpuinfo cache data
    cache size : 22528 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
   node 0 size: 96324 MB
   node 0 free: 95812 MB
   node distances:
   node   0
     0:  10

 From /proc/meminfo
    MemTotal:       98636204 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15"
       VERSION_ID="15"
       PRETTY_NAME="SUSE Linux Enterprise Server 15"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15"

 uname -a:
    Linux ml110-sles15 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:
```

(Continued on next page)

Platform Notes (Continued)

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 May 1 17:28

SPEC is set to: /home/cpu2017_u2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   313G   41G  272G  14% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE U33 02/02/2019
  Memory:
   6x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range

Fortran benchmarks:
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revA.html
http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revA.xml
http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-01 08:01:51-0400.
Report generated on 2019-06-11 17:12:40 by CPU2017 PS formatter v6067.
Originally published on 2019-06-11.