



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

**SPECrate2017\_fp\_base = 524**  
**SPECrate2017\_fp\_peak = 577**

CPU2017 License: 9082


Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

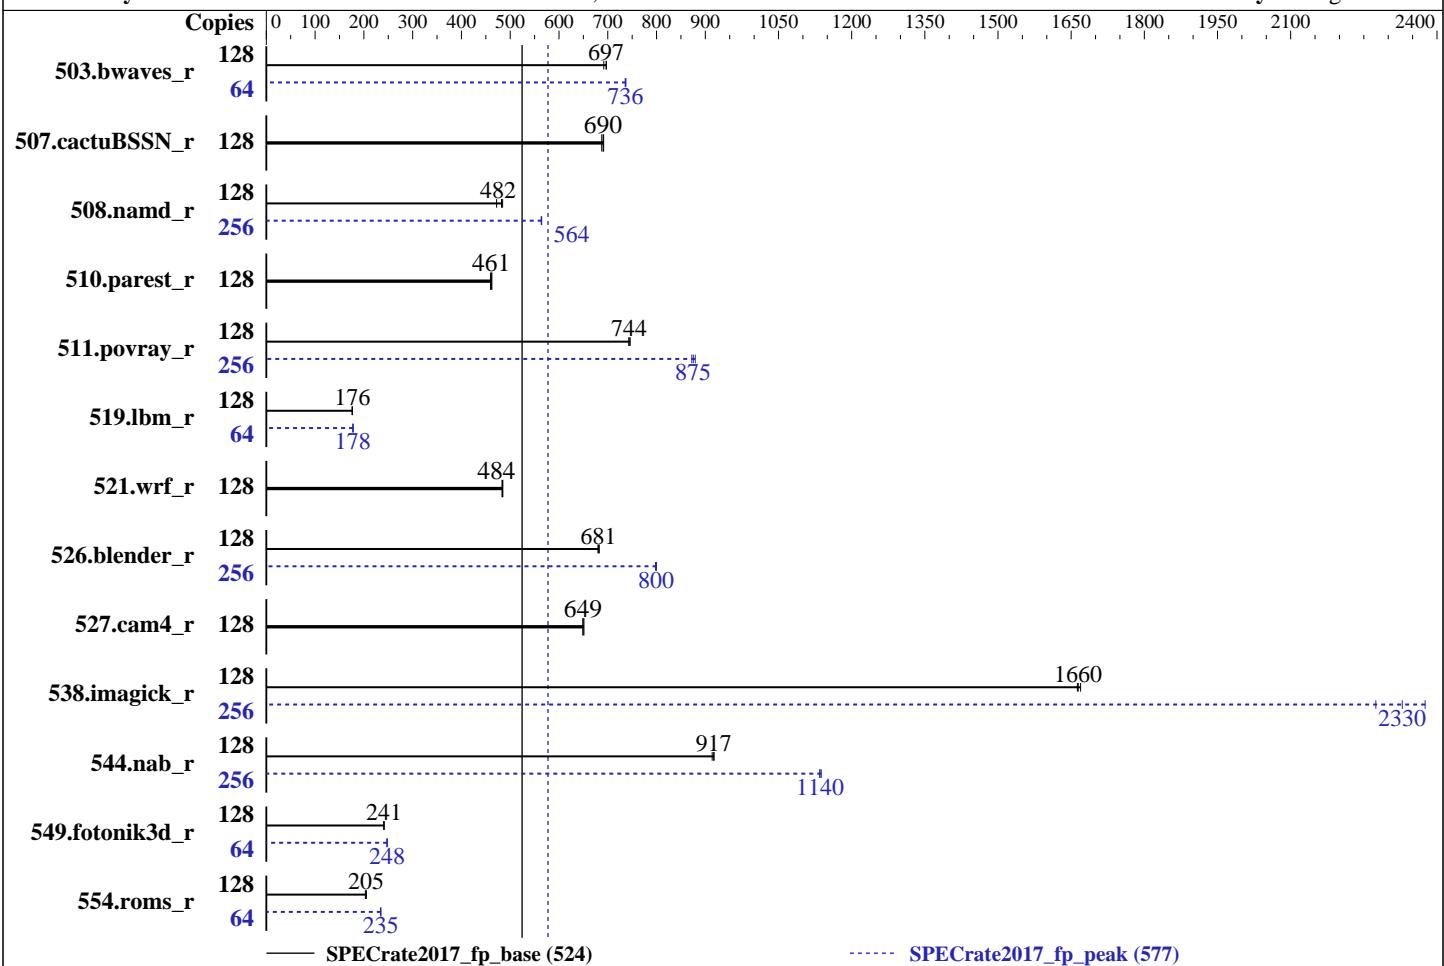

— SPECrate2017\_fp\_base (524)

----- SPECrate2017\_fp\_peak (577)

## Hardware

CPU Name: AMD EPYC 7742  
Max MHz.: 3400  
Nominal: 2250  
Enabled: 128 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 4DRx4 PC4-3200AA-L)  
Storage: 1 x 1.92 TB SATA SSD  
Other: None

## Software

OS: Ubuntu 19.04 (x86\_64)  
Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
Parallel: No  
Firmware: Version D13 released Jul-2019  
File System: ext4  
System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc: jemalloc memory allocator library V5.2.0;



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

**SPECrate2017\_fp\_base = 524**  
**SPECrate2017\_fp\_peak = 577**

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1855	692	1841	697	<b>1842</b>	<b>697</b>	64	<b>872</b>	<b>736</b>	871	737	872	736
507.cactusBSSN_r	128	236	688	234	691	<b>235</b>	<b>690</b>	128	236	688	234	691	<b>235</b>	<b>690</b>
508.namd_r	128	258	472	<b>252</b>	<b>482</b>	251	484	256	431	565	<b>431</b>	<b>564</b>	432	564
510.parest_r	128	729	459	724	462	<b>726</b>	<b>461</b>	128	729	459	724	462	<b>726</b>	<b>461</b>
511.povray_r	128	402	743	401	746	<b>402</b>	<b>744</b>	256	680	879	685	872	<b>683</b>	<b>875</b>
519.lbm_r	128	767	176	765	176	<b>765</b>	<b>176</b>	64	379	178	380	178	<b>380</b>	<b>178</b>
521.wrf_r	128	593	483	<b>592</b>	<b>484</b>	591	485	128	593	483	<b>592</b>	<b>484</b>	591	485
526.blender_r	128	287	680	286	683	<b>286</b>	<b>681</b>	256	489	798	<b>488</b>	<b>800</b>	487	800
527.cam4_r	128	<b>345</b>	<b>649</b>	345	649	344	651	128	<b>345</b>	<b>649</b>	345	649	344	651
538.imagick_r	128	191	1660	<b>191</b>	<b>1660</b>	191	1670	256	<b>273</b>	<b>2330</b>	280	2270	268	2380
544.nab_r	128	<b>235</b>	<b>917</b>	236	914	235	918	256	<b>380</b>	<b>1140</b>	380	1130	379	1140
549.fotonik3d_r	128	2066	241	<b>2066</b>	<b>241</b>	2073	241	64	<b>1008</b>	<b>248</b>	1008	247	1007	248
554.roms_r	128	992	205	<b>994</b>	<b>205</b>	1002	203	64	434	234	<b>433</b>	<b>235</b>	433	235

**SPECrate2017\_fp\_base = 524**

**SPECrate2017\_fp\_peak = 577**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2017/amd\_rate\_aocc200\_rome\_A\_lib/64;/root/cpu2017/amd\_rate\_aocc200\_rome\_A\_lib/32;"  
MALLOC\_CONF = "retain:true"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/amd-aocc/>

jemalloc: configured and built with GCC 9.1.0 in Ubuntu 19.04

with flags: -O3 -march=znver2 -lto. jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:

cTDP = 240

Determinism Slider set to Power

SMT set to auto

IOMMU set to enable

Package Power Limit set to 240

NUMA nodes per socket set to NPS4

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on test Thu Jul 18 18:08:07 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7742 64-Core Processor

2 "physical id"s (chips)

256 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 128

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 256
On-line CPU(s) list: 0-255
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7742 64-Core Processor
Stepping: 0
CPU MHz: 3399.162
CPU max MHz: 2250.0000
CPU min MHz: 1500.0000
BogoMIPS: 4500.13
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmpfperf pnpi
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524

SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
vmmcall fsgsbase bmi1 avx2 smep bmi2 cqmq rdt_a rdseed adx smap clflushopt clwb  
sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total  
cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrrip_save  
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic  
v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data  
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 128 129 130 131 132 133 134 135 136  
137 138 139 140 141 142 143  
node 0 size: 128885 MB  
node 0 free: 128250 MB  
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 144 145 146 147 148 149  
150 151 152 153 154 155 156 157 158 159  
node 1 size: 129015 MB  
node 1 free: 128500 MB  
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 160 161 162 163 164 165  
166 167 168 169 170 171 172 173 174 175  
node 2 size: 129015 MB  
node 2 free: 128505 MB  
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 176 177 178 179 180 181  
182 183 184 185 186 187 188 189 190 191  
node 3 size: 129003 MB  
node 3 free: 128347 MB  
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 192 193 194 195 196 197  
198 199 200 201 202 203 204 205 206 207  
node 4 size: 129015 MB  
node 4 free: 128500 MB  
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 208 209 210 211 212 213  
214 215 216 217 218 219 220 221 222 223  
node 5 size: 129015 MB  
node 5 free: 128482 MB  
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 224 225 226  
227 228 229 230 231 232 233 234 235 236 237 238 239  
node 6 size: 129015 MB  
node 6 free: 128368 MB  
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 240 241  
242 243 244 245 246 247 248 249 250 251 252 253 254 255  
node 7 size: 128991 MB  
node 7 free: 128428 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 12 12 12 32 32 32 32
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

From /proc/meminfo

```
MemTotal: 1056726660 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 19.04
```

From /etc/\*release\* /etc/\*version\*

```
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="19.04 (Disco Dingo)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 19.04"
  VERSION_ID="19.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux test 5.0.0-16-generic #17-Ubuntu SMP Wed May 15 10:52:21 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling
```

run-level 5 Jul 18 23:56

```
SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  1.8T  29G  1.7T   2%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS GIGABYTE D13 07/13/2019

Memory:

16x Samsung M386A8K40DM2-CWE 64 kB 4 rank 3200  
16x Unknown Unknown

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
    AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
-----

=====
CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
    AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
-----

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
    peak)
-----
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
    AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
-----

=====
CC 511.povray_r(base, peak) 521.wrf_r(base, peak) 526.blender_r(base, peak)
    527.cam4_r(base, peak)
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019\_06\_12)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019\_06\_12)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

-----

=====  
FC 507.cactubSSN\_r(base, peak)

AOCC.LLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019\_06\_12)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019\_06\_12)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019\_06\_12)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B179.2019\_06\_12 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019\_06\_12)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-fno-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc  
-lflang

C++ benchmarks:

-std=c++98 -fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -fno-function-specialization

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524

SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2  
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs  
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs  
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only  
-lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using both C and C++:

```
clang++ clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2  
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
508.namd_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -fiv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

```
510.parest_r: basepeak = yes
```

Fortran benchmarks:

```
503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

```
549.fotonik3d_r: Same as 503.bwaves_r
```

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: basepeak = yes
```

```
527.cam4_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

```
526.blender_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Rome-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Rome-B.xml>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7742, 2.25GHz)

SPECrate2017\_fp\_base = 524  
SPECrate2017\_fp\_peak = 577

CPU2017 License: 9082

Test Date: Jul-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-18 06:08:06-0400.

Report generated on 2019-08-08 11:13:21 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-08.