SPEC CPU®2017 Integer Rate Result

ASUSTeK Computer Inc.

ASUS RS100-E10(P11C-M/4L) Server System
(3.60 GHz, Intel Xeon E-2144G)

SPECrate®2017_int_base = 34.5

SPECrate®2017_int_peak = 35.9

CPU2017 License:	9016	**Test Date:**	Aug-2019
Test Sponsor:	ASUSTeK Computer Inc.	**Hardware Availability:**	Jun-2019
Tested by:	ASUSTeK Computer Inc.	**Software Availability:**	May-2019

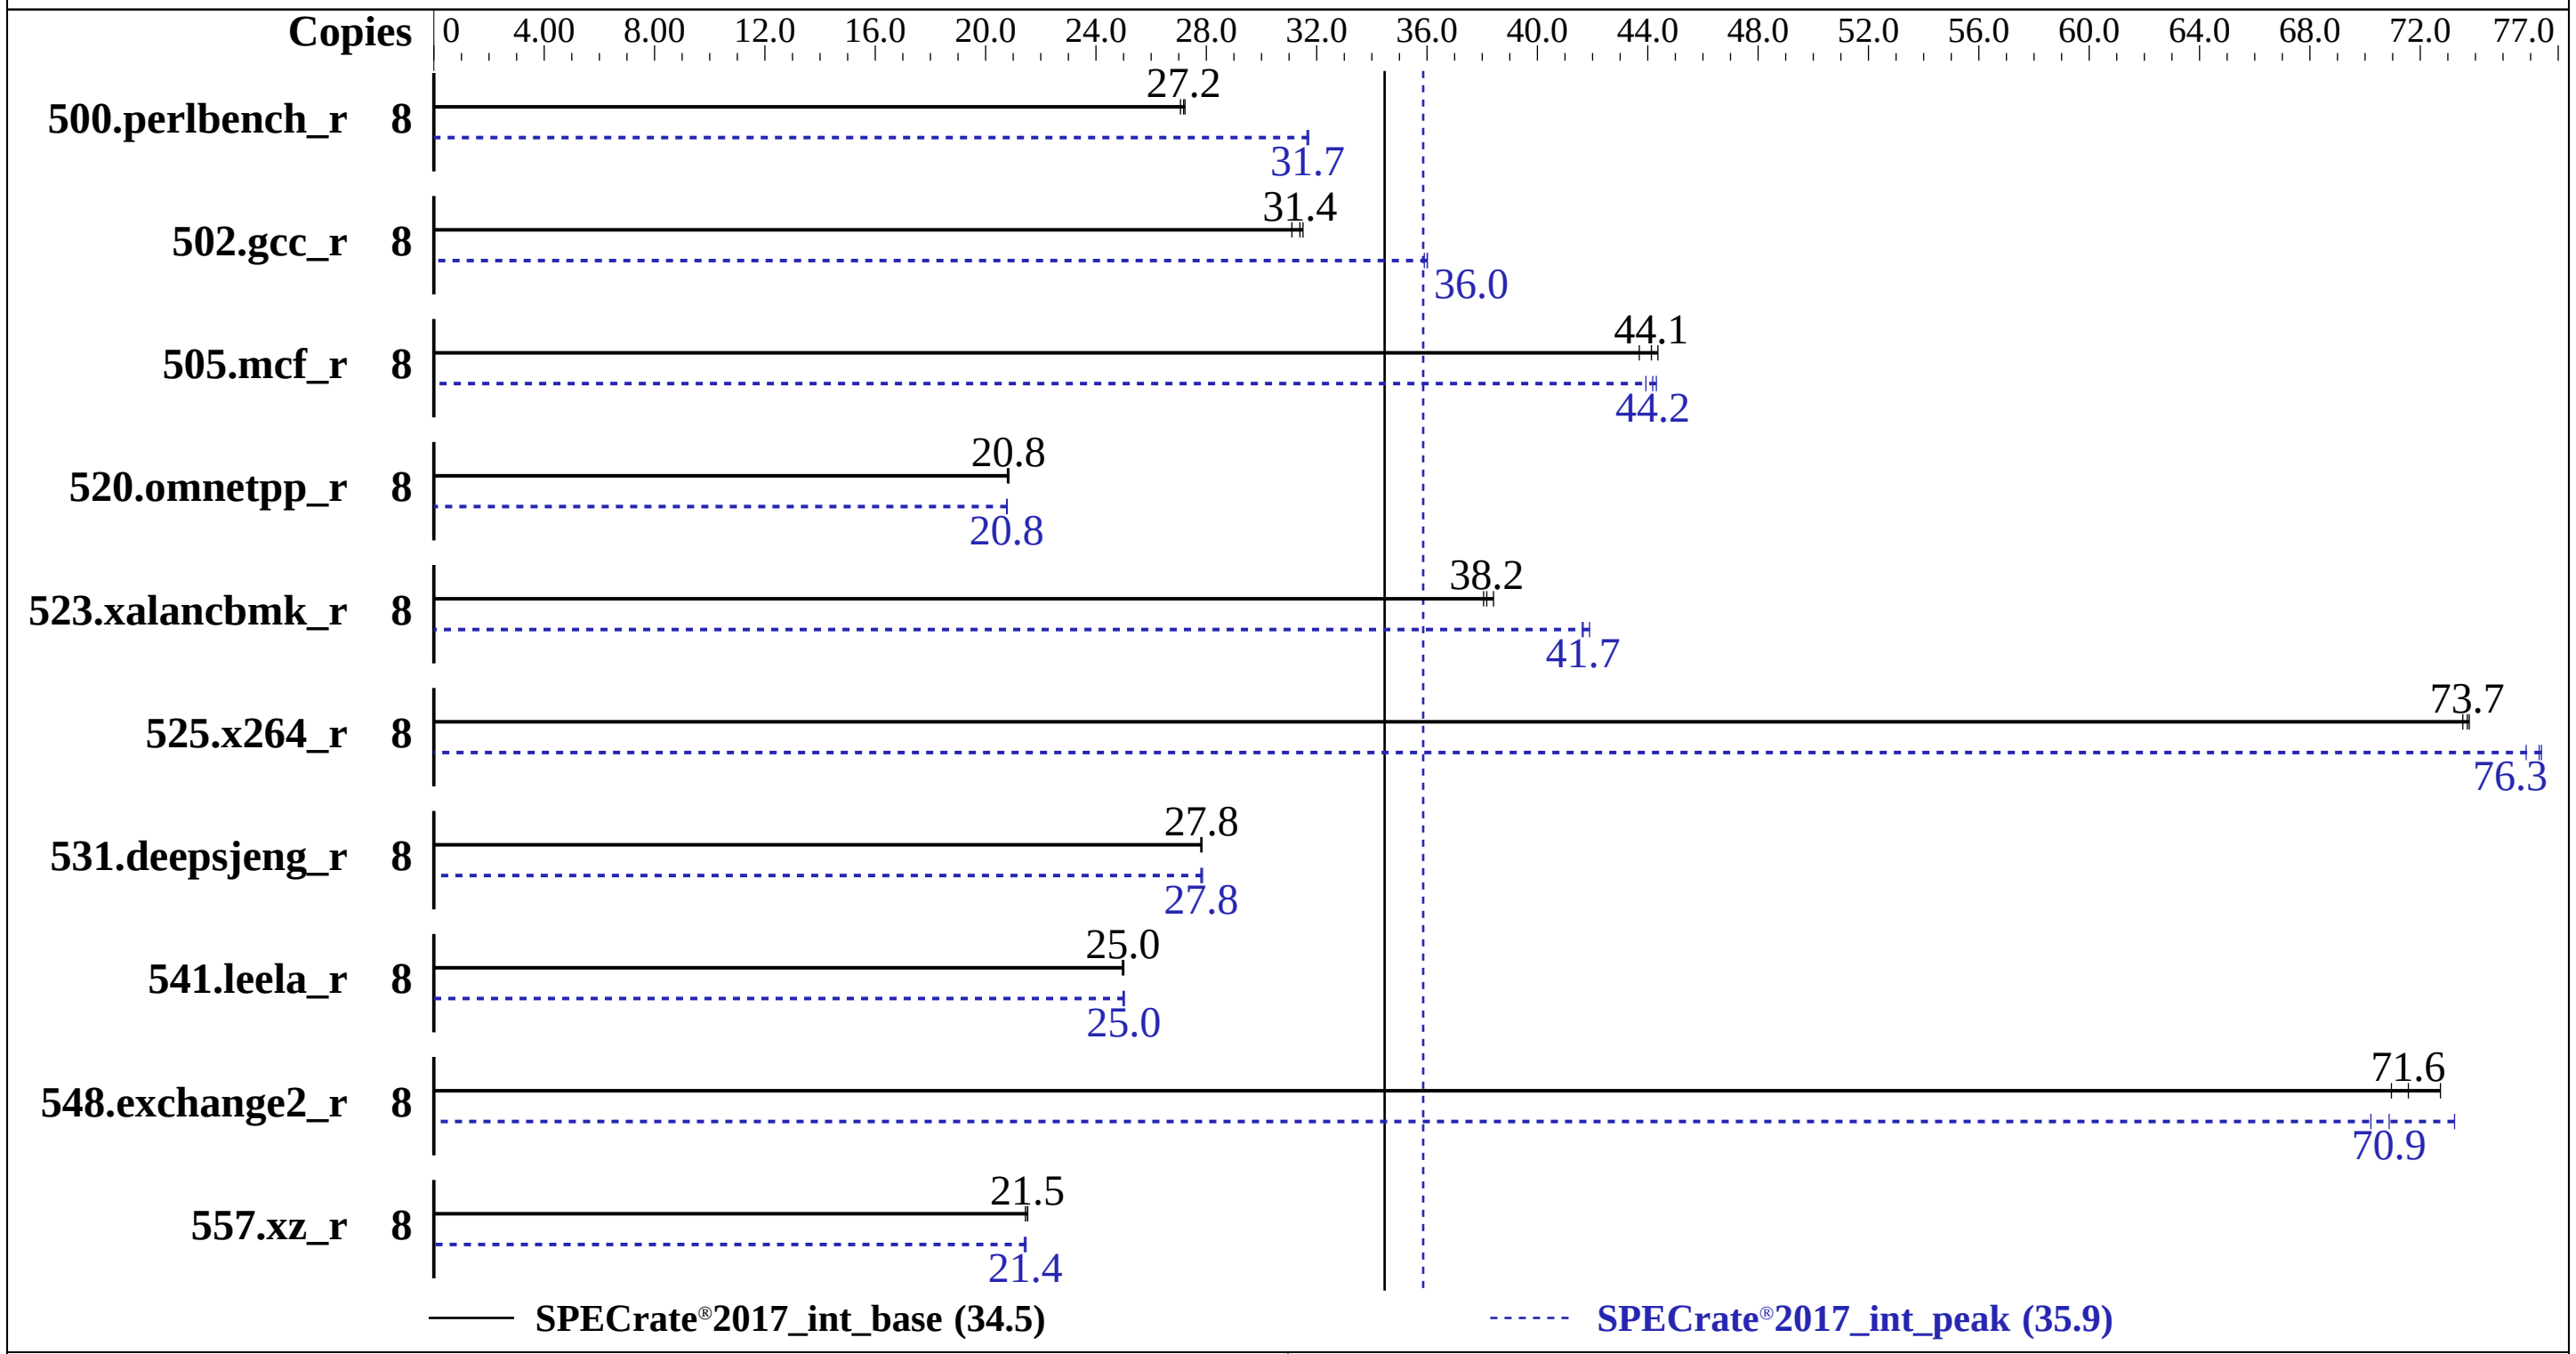

Hardware

CPU Name:	Intel Xeon E-2144G
Max MHz:	4500
Nominal:	3600
Enabled:	4 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	8 MB I+D on chip per chip
Other:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
Storage:	1 x 500 GB SATA HDD, 7200RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 Kernel 4.12.14-150.17-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	Version 0703 released Jun-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library V5.0.1
Power Management:	--

ASUSTeK Computer Inc.

ASUS RS100-E10(P11C-M/4L) Server System
(3.60 GHz, Intel Xeon E-2144G)

SPECrate®2017_int_base = 34.5

SPECrate®2017_int_peak = 35.9

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.
Test Date: Aug-2019
Hardware Availability: Jun-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	8	**469**	**27.2**	471	27.1	468	27.2	8	402	31.7	402	31.7	**402**	**31.7**
502.gcc_r	8	364	31.1	**361**	**31.4**	360	31.5	8	316	35.9	315	36.0	**315**	**36.0**
505.mcf_r	8	296	43.7	**293**	**44.1**	291	44.4	8	292	44.3	**293**	**44.2**	294	43.9
520.omnetpp_r	8	**504**	**20.8**	505	20.8	504	20.8	8	506	20.8	505	20.8	**505**	**20.8**
523.xalancbmk_r	8	**221**	**38.2**	222	38.1	220	38.4	8	202	41.9	203	41.6	**203**	**41.7**
525.x264_r	8	190	73.8	**190**	**73.7**	190	73.5	8	**184**	**76.3**	185	75.8	183	76.4
531.deepsjeng_r	8	329	27.8	**329**	**27.8**	330	27.8	8	**330**	**27.8**	330	27.8	329	27.9
541.leela_r	8	530	25.0	**530**	**25.0**	531	25.0	8	530	25.0	**530**	**25.0**	529	25.0
548.exchange2_r	8	295	71.0	**293**	**71.6**	288	72.7	8	286	73.2	299	70.2	**296**	**70.9**
557.xz_r	8	401	21.5	403	21.4	**401**	**21.5**	8	404	21.4	**403**	**21.4**	403	21.5

SPECrate®2017_int_base = 34.5

SPECrate®2017_int_peak = 35.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017_19u4/lib/intel64:/spec2017_19u4/lib/ia32:
/spec2017_19u4/je5.0.1-32"
 Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration:
VT-d = Disabled
AES = Disabled
Hardware Prefetcher = Disabled
Adjacent Cache Line Prefetch = Disabled
Race to Halt (RTH) = Disabled
 Sysinfo program /spec2017_19u4/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-ngvl Mon Aug  5 10:47:49 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) E-2144G CPU @ 3.60GHz
       1  "physical id"s (chips)
       8 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 4
       siblings  : 8
       physical 0: cores 0 1 2 3

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              8
      On-line CPU(s) list: 0-7
      Thread(s) per core:  2
      Core(s) per socket:  4
      Socket(s):           1
      NUMA node(s):        1
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               158
      Model name:          Intel(R) Xeon(R) E-2144G CPU @ 3.60GHz
```

(Continued on next page)

Platform Notes (Continued)

```
      Stepping:              10
      CPU MHz:               3600.000
      CPU max MHz:           4500.0000
      CPU min MHz:           800.0000
      BogoMIPS:              7200.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              256K
      L3 cache:              8192K
      NUMA node0 CPU(s):     0-7
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
      sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single pti
      ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt
      xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
      flush_l1d

 /proc/cpuinfo cache data
    cache size : 8192 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3 4 5 6 7
   node 0 size: 64322 MB
   node 0 free: 63807 MB
   node distances:
   node   0
     0:  10

 From /proc/meminfo
    MemTotal:       65865912 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15"
       VERSION_ID="15"
       PRETTY_NAME="SUSE Linux Enterprise Server 15"
       ID="sles"
```

(Continued on next page)

Platform Notes (Continued)

```
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15"

 uname -a:
    Linux linux-ngvl 4.12.14-150.17-default #1 SMP Thu May 2 15:15:46 UTC 2019 (bf13fb8)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Mitigation: PTI
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full generic retpoline, IBPB: conditional,
 IBRS_FW, STIBP: conditional, RSB filling

 run-level 3 Aug 5 10:16

 SPEC is set to: /spec2017_19u4
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   442G   23G  419G   6% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 0703 06/13/2019
   Memory:
    4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667, configured at 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

ASUSTeK Computer Inc.

ASUS RS100-E10(P11C-M/4L) Server System
(3.60 GHz, Intel Xeon E-2144G)

SPECrate®2017_int_base = 34.5

SPECrate®2017_int_peak = 35.9

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.
Test Date: Aug-2019
Hardware Availability: Jun-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

```
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4`
`-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64`
`-lqkmalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4`
`-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64`
`-lqkmalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte`
`-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64`
`-lqkmalloc`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64 -std=c11`

502.gcc_r: `icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):
`icpc -m64`

523.xalancbmk_r: `icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin`

Fortran benchmarks:
`ifort -m64`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-D_FILE_OFFSET_BITS=64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`

(Continued on next page)

Peak Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

(Continued on next page)

Peak Optimization Flags (Continued)

541.leela_r: `Same as 520.omnetpp_r`

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revB.html
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revB.xml
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-04 22:47:48-0400.
Report generated on 2019-09-17 16:04:10 by CPU2017 PS formatter v6255.
Originally published on 2019-09-17.