SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF8480M5 (Intel Xeon Gold 5120)

SPECrate®2017_int_base = 269

SPECrate®2017_int_peak = 288

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Aug-2019
Hardware Availability: Oct-2017
Software Availability: Dec-2018

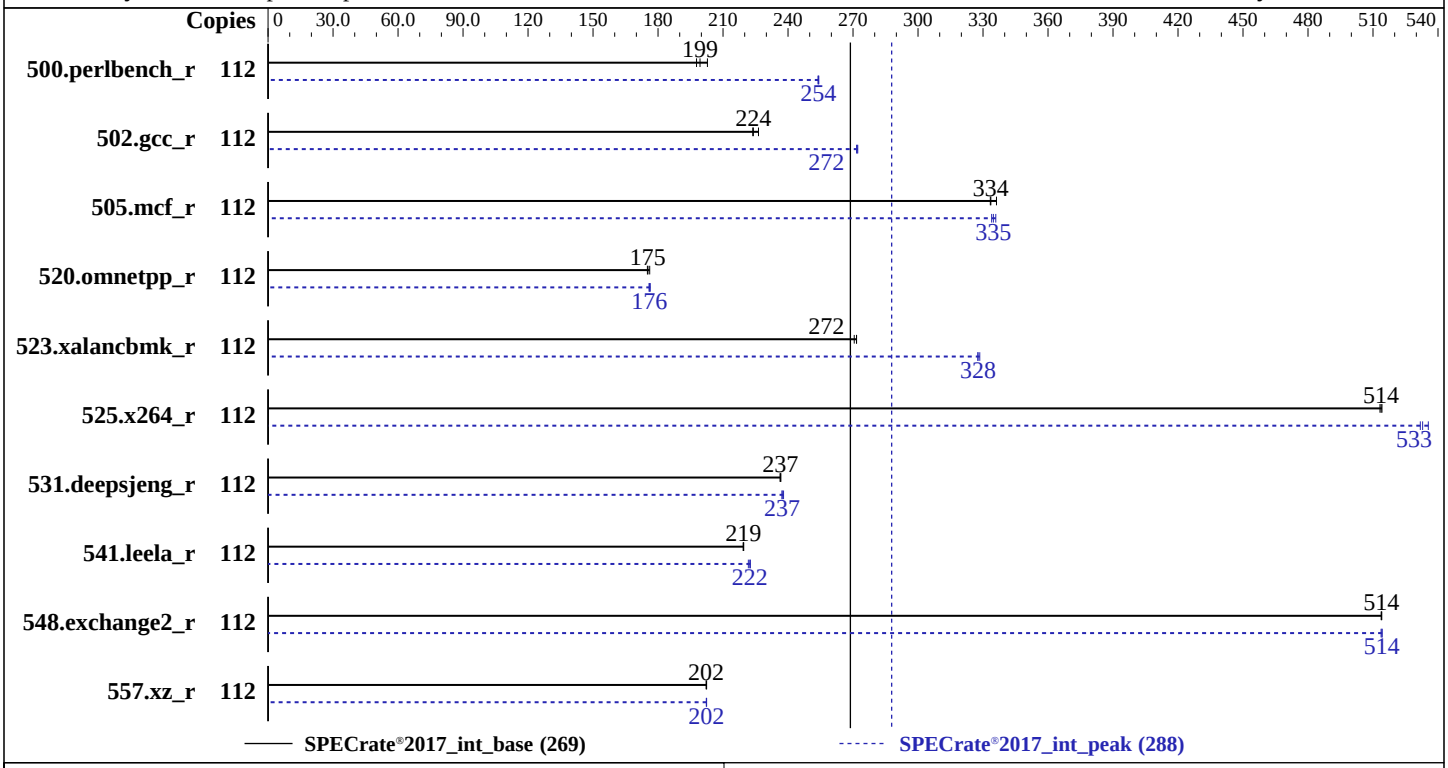

Hardware

CPU Name:	Intel Xeon Gold 5120
Max MHz:	3200
Nominal:	2200
Enabled:	56 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	19.25 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage:	1 x 4 TB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 4.1.06 released Jul-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library V5.0.1
Power Management:	--

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF8480M5 (Intel Xeon Gold 5120)

SPECrate®2017_int_base = 269

SPECrate®2017_int_peak = 288

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Aug-2019
Hardware Availability: Oct-2017
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	879	203	902	198	**894**	**199**	112	702	254	**702**	**254**	701	254
502.gcc_r	112	701	226	**708**	**224**	709	224	112	583	272	**583**	**272**	584	272
505.mcf_r	112	**543**	**334**	543	333	538	336	112	542	334	**541**	**335**	539	336
520.omnetpp_r	112	834	176	839	175	**838**	**175**	112	836	176	833	176	**835**	**176**
523.xalancbmk_r	112	437	271	**435**	**272**	435	272	112	361	328	**361**	**328**	360	329
525.x264_r	112	**382**	**514**	382	513	381	514	112	**368**	**533**	366	536	369	532
531.deepsjeng_r	112	542	237	**543**	**237**	543	236	112	539	238	**541**	**237**	541	237
541.leela_r	112	**845**	**219**	846	219	845	220	112	**834**	**222**	837	222	833	223
548.exchange2_r	112	571	514	**571**	**514**	571	514	112	**571**	**514**	571	514	571	514
557.xz_r	112	**598**	**202**	598	202	598	202	112	598	202	**598**	**202**	598	202

SPECrate®2017_int_base = 269

SPECrate®2017_int_peak = 288

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/ia32:/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-32:/home/CPU2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
 BIOS and OS configuration:
 SCALING_GOVERNOR set to Performance
 Hardware Prefetch set to Disable
 VT Support set to Disable
 C1E Support set to Disable
 IMC (Integrated memory controller) Interleaving set to 1-way
 Sub NUMA Cluster (SNC) set to Enable
 Sysinfo program /home/CPU2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-rtlm Mon Nov 12 13:39:51 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
       4  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 14
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                112
      On-line CPU(s) list:   0-111
```

(Continued on next page)

Platform Notes (Continued)

```
      Thread(s) per core:    2
      Core(s) per socket:    14
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
      Stepping:              4
      CPU MHz:               2200.000
      CPU max MHz:           3200.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              19712K
      NUMA node0 CPU(s):     0-3,7-9,56-59,63-65
      NUMA node1 CPU(s):     4-6,10-13,60-62,66-69
      NUMA node2 CPU(s):     14-17,21-23,70-73,77-79
      NUMA node3 CPU(s):     18-20,24-27,74-76,80-83
      NUMA node4 CPU(s):     28-31,35-37,84-87,91-93
      NUMA node5 CPU(s):     32-34,38-41,88-90,94-97
      NUMA node6 CPU(s):     42-45,49-51,98-101,105-107
      NUMA node7 CPU(s):     46-48,52-55,102-104,108-111
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single pti intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority
      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke flush_l1d

  /proc/cpuinfo cache data
     cache size : 19712 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 7 8 9 56 57 58 59 63 64 65
    node 0 size: 192065 MB
    node 0 free: 191754 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 1 cpus: 4 5 6 10 11 12 13 60 61 62 66 67 68 69
   node 1 size: 193528 MB
   node 1 free: 193259 MB
   node 2 cpus: 14 15 16 17 21 22 23 70 71 72 73 77 78 79
   node 2 size: 193528 MB
   node 2 free: 193305 MB
   node 3 cpus: 18 19 20 24 25 26 27 74 75 76 80 81 82 83
   node 3 size: 193528 MB
   node 3 free: 193347 MB
   node 4 cpus: 28 29 30 31 35 36 37 84 85 86 87 91 92 93
   node 4 size: 193528 MB
   node 4 free: 193329 MB
   node 5 cpus: 32 33 34 38 39 40 41 88 89 90 94 95 96 97
   node 5 size: 193499 MB
   node 5 free: 193315 MB
   node 6 cpus: 42 43 44 45 49 50 51 98 99 100 101 105 106 107
   node 6 size: 193528 MB
   node 6 free: 193155 MB
   node 7 cpus: 46 47 48 52 53 54 55 102 103 104 108 109 110 111
   node 7 size: 193309 MB
   node 7 free: 193120 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  21  21  31  31  21  21
     1:  11  10  21  21  31  31  21  21
     2:  21  21  10  11  21  21  31  31
     3:  21  21  11  10  21  21  31  31
     4:  31  31  21  21  10  11  21  21
     5:  31  31  21  21  11  10  21  21
     6:  21  21  31  31  21  21  10  11
     7:  21  21  31  31  21  21  11  10

 From /proc/meminfo
    MemTotal:       1583630252 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP4

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 4
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
```


(Continued on next page)

Platform Notes (Continued)

```
    os-release:
       NAME="SLES"
       VERSION="12-SP4"
       VERSION_ID="12.4"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp4"

  uname -a:
     Linux linux-rtlm 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2017-5754 (Meltdown):          Mitigation: PTI
  CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
  IBPB, IBRS_FW

  run-level 3 Nov 12 13:38 last=5

  SPEC is set to: /home/CPU2017
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/nvme0n1p4 xfs   3.6T   68G  3.6T   2% /home

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS Inspur 4.1.06 07/02/2019
    Memory:
     48x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base,
        | peak) 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64 -std=c11

502.gcc_r: icc -m32 -std=c11 -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

C++ benchmarks (except as noted below):
icpc -m64

523.xalancbmk_r: icpc -m32 -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

Fortran benchmarks:
ifort -m64

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-strict-overflow -L/usr/local/je5.0.1-64/lib -ljemalloc`

502.gcc_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

505.mcf_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

525.x264_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc`

557.xz_r: `Same as 505.mcf_r`

C++ benchmarks:

520.omnetpp_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

523.xalancbmk_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

531.deepsjeng_r: `Same as 520.omnetpp_r`

541.leela_r: `Same as 520.omnetpp_r`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.3-SKL.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.3-SKL.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2018-11-12 13:39:50-0500.
Report generated on 2019-09-17 16:08:38 by CPU2017 PS formatter v6255.
Originally published on 2019-09-17.