SPEC CPU®2017 Floating Point Speed Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10
(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017_fp_base = 91.5

SPECspeed®2017_fp_peak = Not Run

CPU2017 License:	3	**Test Date:**	Aug-2019
Test Sponsor:	HPE	**Hardware Availability:**	Aug-2019
Tested by:	HPE	**Software Availability:**	Jun-2019

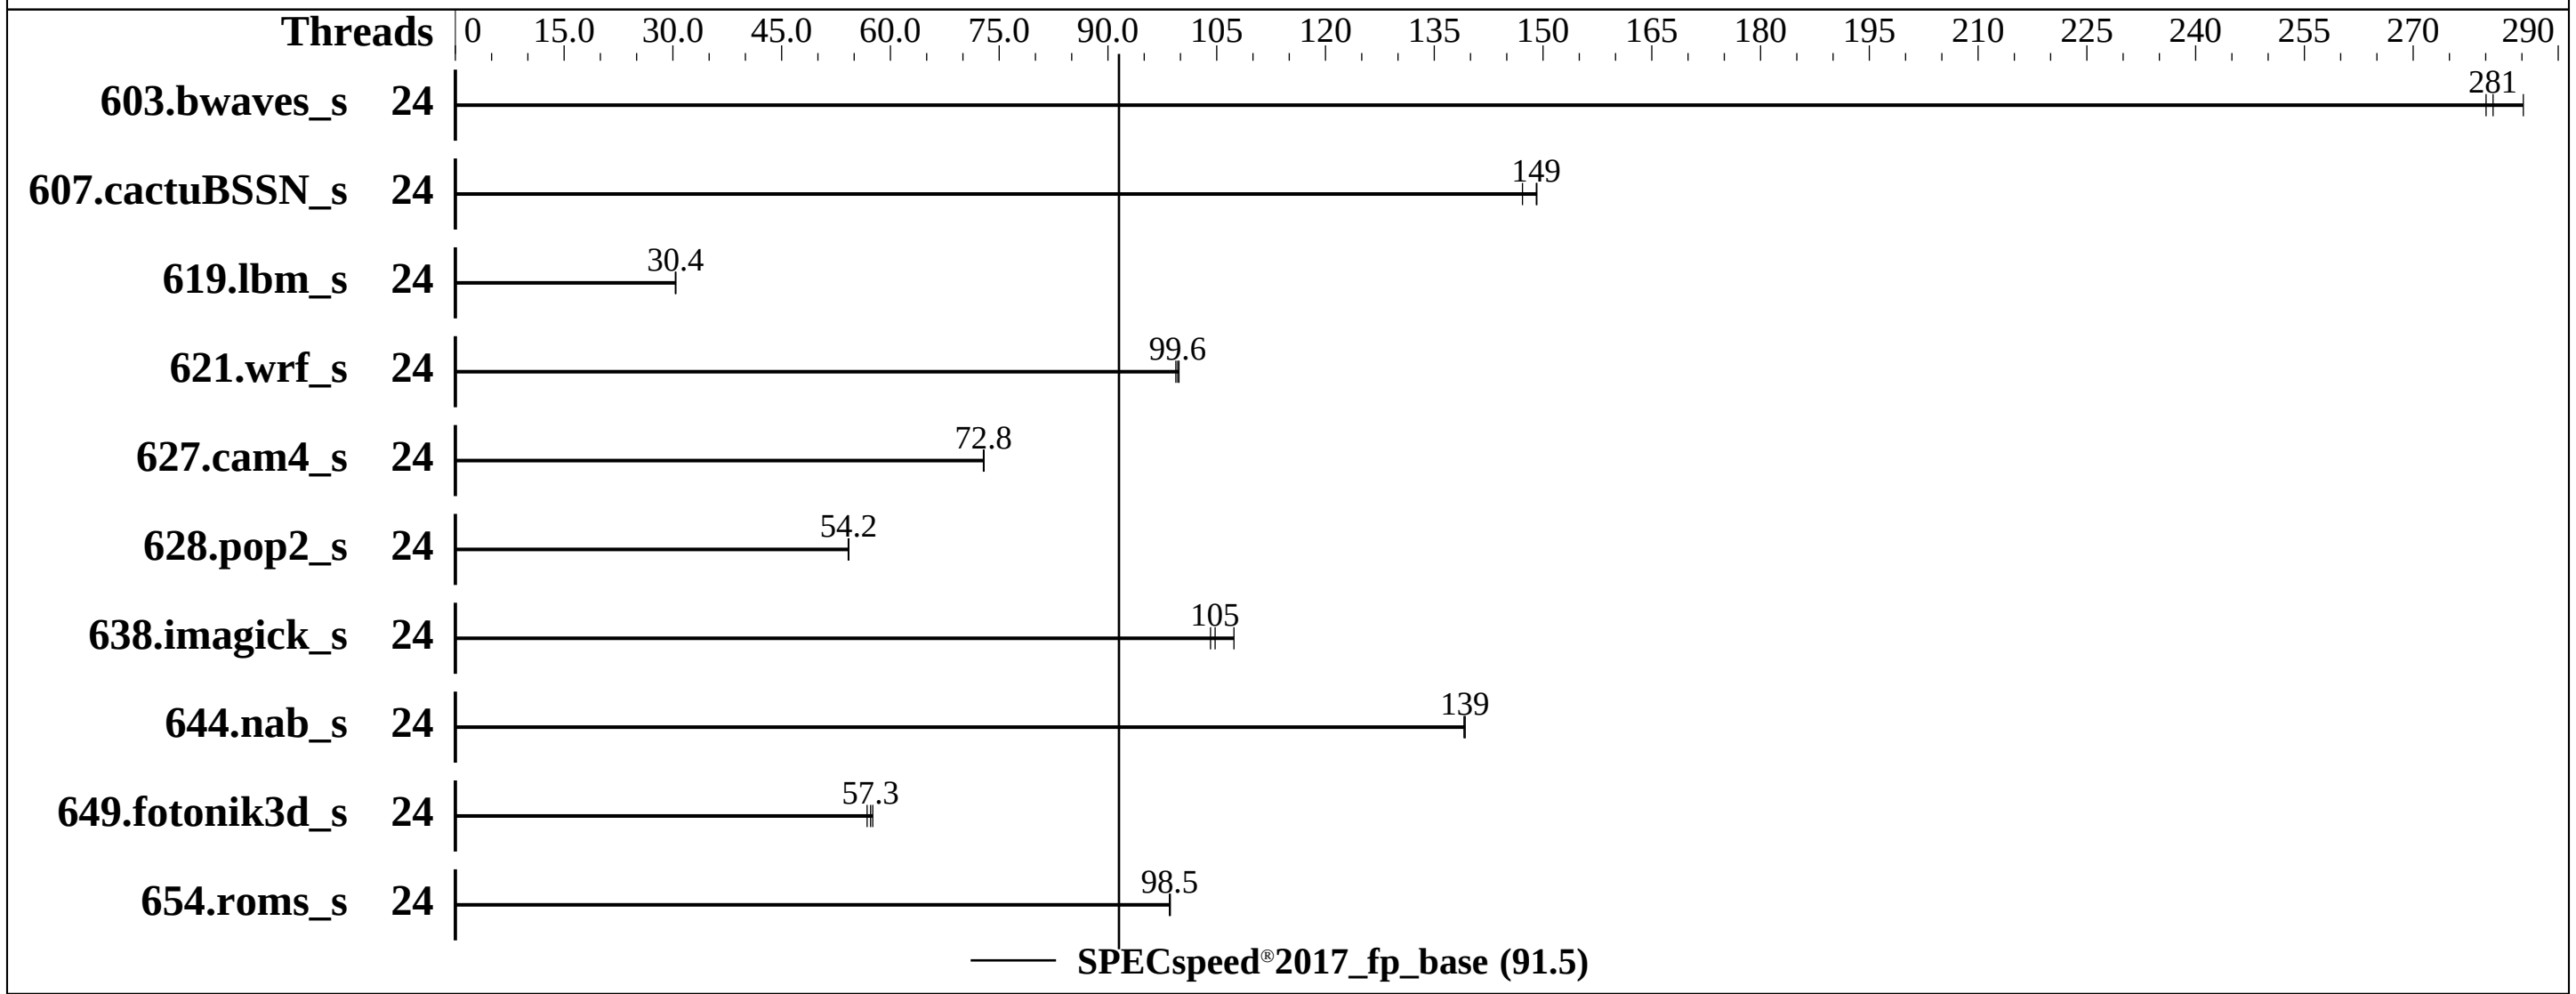

Hardware

CPU Name:	AMD EPYC 7402P
Max MHz:	3350
Nominal:	2800
Enabled:	24 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 16 MB shared / 3 cores
Other:	None
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 400 GB NVMe SSD, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 (x86_64) SP1 Kernel 4.12.14-195-default
Compiler:	C/C++: Version 1.3.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	Yes
Firmware:	HPE BIOS Version A41 07/20/2019 released Aug-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc: jemalloc memory allocator library v5.1.0;
Power Management:	--

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL325 Gen10
(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017_fp_base = 91.5
SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE
Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Jun-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	207	285	211	280	**210**	**281**							
607.cactuBSSN_s	24	**112**	**149**	112	149	113	147							
619.lbm_s	24	172	30.4	173	30.4	**172**	**30.4**							
621.wrf_s	24	**133**	**99.6**	133	99.8	133	99.4							
627.cam4_s	24	**122**	**72.8**	122	72.9	122	72.8							
628.pop2_s	24	**219**	**54.2**	219	54.3	219	54.2							
638.imagick_s	24	**138**	**105**	134	107	139	104							
644.nab_s	24	**125**	**139**	126	139	125	139							
649.fotonik3d_s	24	158	57.6	**159**	**57.3**	161	56.8							
654.roms_s	24	160	98.6	160	98.5	**160**	**98.5**							

SPECspeed®2017_fp_base = 91.5

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
```

(Continued on next page)

Operating System Notes (Continued)

```
dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc130_naples_A_lib/64;
/home/cpu2017/amd_speed_aocc130_naples_A_lib/32:"
OMP_DYNAMIC = "false"
OMP_PLACES = "cores"
OMP_PROC_BIND = "close"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "192M"
OMP_WAIT_POLICY = "active"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
BIOS Configuration
 Thermal Configuration set to Maximum Cooling
 SMT Mode set to Disabled
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Minimum Processor Idle Power core C-State set to C6 State
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Peak Frequency Compute
 NUMA memory domains per socket set to Four memory domains per socket
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-20xx Thu Feb 14 11:31:08 2019
```

(Continued on next page)

Platform Notes (Continued)

```
SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7402P 24-Core Processor
      1  "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 24
      physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     Address sizes:       48 bits physical, 48 bits virtual
     CPU(s):              24
     On-line CPU(s) list: 0-23
     Thread(s) per core:  1
     Core(s) per socket:  24
     Socket(s):           1
     NUMA node(s):        4
     Vendor ID:           AuthenticAMD
     CPU family:          23
     Model:               49
     Model name:          AMD EPYC 7402P 24-Core Processor
     Stepping:            0
     CPU MHz:             2800.000
     CPU max MHz:         2800.0000
     CPU min MHz:         1500.0000
     BogoMIPS:            5589.75
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
     L3 cache:            16384K
     NUMA node0 CPU(s):   0-5
     NUMA node1 CPU(s):   6-11
     NUMA node2 CPU(s):   12-17
     NUMA node3 CPU(s):   18-23
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
```

(Continued on next page)

Platform Notes (Continued)

```
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
      cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
      cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5
   node 0 size: 64292 MB
   node 0 free: 64062 MB
   node 1 cpus: 6 7 8 9 10 11
   node 1 size: 64510 MB
   node 1 free: 64327 MB
   node 2 cpus: 12 13 14 15 16 17
   node 2 size: 64510 MB
   node 2 free: 64365 MB
   node 3 cpus: 18 19 20 21 22 23
   node 3 size: 64468 MB
   node 3 free: 64370 MB
   node distances:
   node   0   1   2   3
     0:  10  12  12  12
     1:  12  10  12  12
     2:  12  12  10  12
     3:  12  12  12  10

 From /proc/meminfo
    MemTotal:       263968224 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15-SP1"
       VERSION_ID="15.1"
       PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
       ID="sles"
       ID_LIKE="suse"
```

(Continued on next page)

Platform Notes (Continued)

```
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:
   Linux linux-20xx 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: disabled, RSB filling

run-level 3 Feb 14 08:21

SPEC is set to: /home/cpu2017
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/nvme0n1p1 btrfs  373G   34G  338G   9% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE A41 07/20/2019
  Memory:
   8x UNKNOWN NOT AVAILABLE
   8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`clang gfortran`

Benchmarks using both Fortran and C:
`clang gfortran`

Benchmarks using Fortran, C, and C++:
`clang++ clang gfortran`

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm  -enable-gvn-hoist
-mllvm -function-specialize -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -ljemalloc
-lamdlibm
```

Fortran benchmarks:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -mavx -madx
```

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
```
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-DSPEC_OPENMP -DUSE_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc -lamdlibm -lgfortran
```

Benchmarks using both Fortran and C:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm  -enable-gvn-hoist
-mllvm -function-specialize -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-DSPEC_OPENMP -DUSE_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc -lamdlibm -lgfortran
```

Benchmarks using Fortran, C, and C++:
```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm  -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compares=false -mavx
-madx -funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc -lamdlibm
```

Base Other Flags

C benchmarks:
```
-Wno-return-type
```

Fortran benchmarks:
```
-Wno-return-type
```

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
-Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc130-flags-revA2-HPE.html
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc130-flags-revA2-HPE.xml
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-02-14 12:31:07-0500.
Report generated on 2019-10-02 12:03:57 by CPU2017 PS formatter v6255.
Originally published on 2019-10-01.