SPEC CPU®2017 Integer Rate Result

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8276L, 2.20GHz

SPECrate®2017_int_base = 584

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

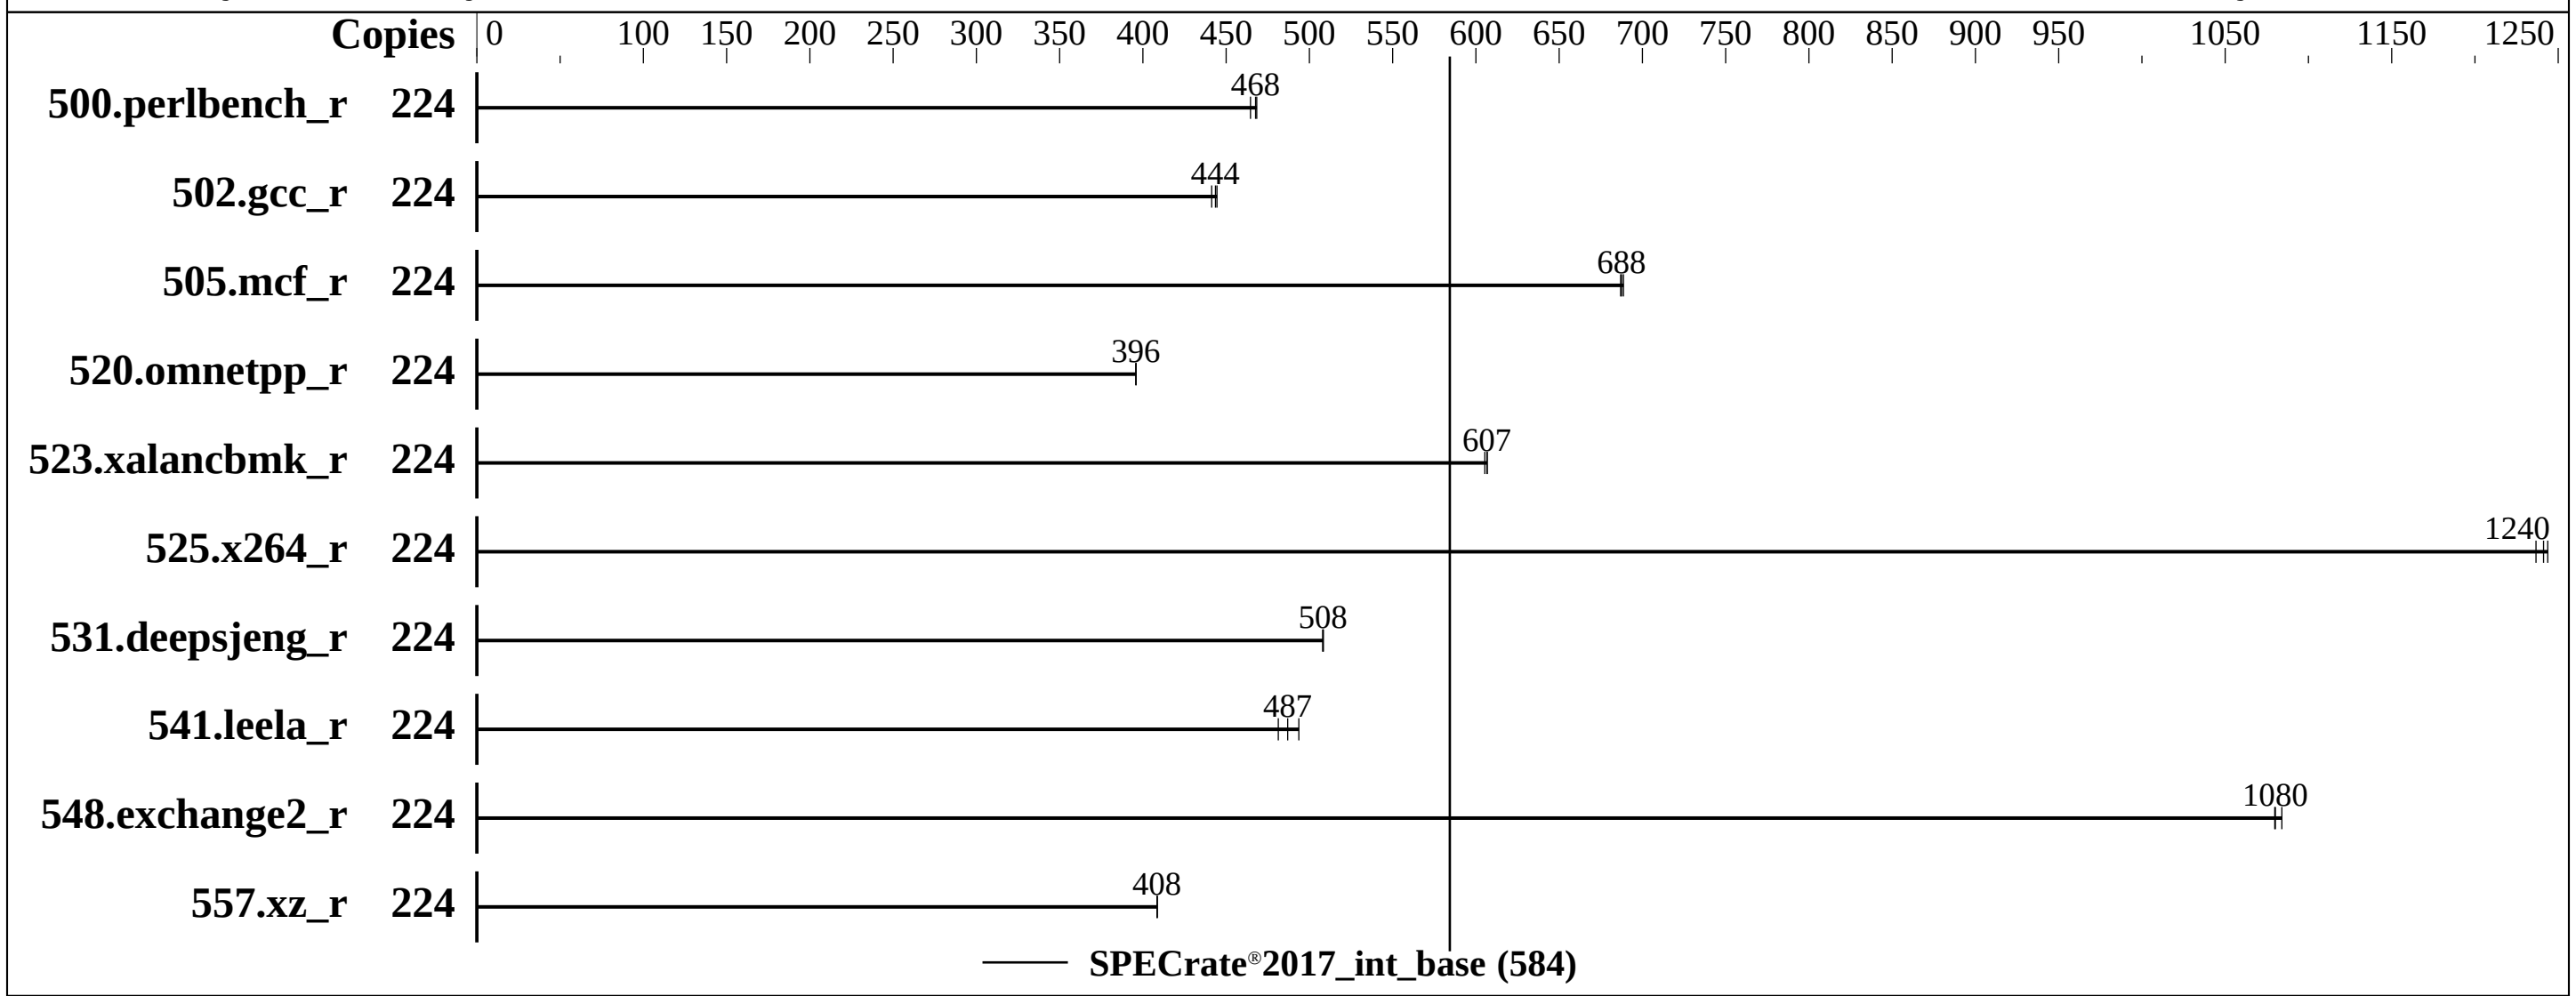

Hardware

CPU Name:	Intel Xeon Platinum 8276L
Max MHz:	4000
Nominal:	2200
Enabled:	112 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x SATA M.2 SSD, 480 GB
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 4.12.14-25.28-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3753-C1x. Released Jun-2019 tested as V5.0.0.14 R1.3.0 for D3753-C1x Mar-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	--

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8276L, 2.20GHz

SPECrate®2017_int_base = 584

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	761	468	**763**	**468**	768	465							
502.gcc_r	224	**715**	**444**	714	444	719	441							
505.mcf_r	224	**526**	**688**	526	689	527	687							
520.omnetpp_r	224	**742**	**396**	743	396	742	396							
523.xalancbmk_r	224	390	607	**390**	**607**	391	605							
525.x264_r	224	315	1240	**316**	**1240**	317	1240							
531.deepsjeng_r	224	505	508	505	508	**505**	**508**							
541.leela_r	224	751	494	771	481	**762**	**487**							
548.exchange2_r	224	**543**	**1080**	544	1080	541	1080							
557.xz_r	224	592	409	592	408	**592**	**408**							

SPECrate®2017_int_base = 584

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-223
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-int/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
DCU Streamer Prefetcher = Disabled
Fan Control = Full
Energy Performance = Performance
Hardware Prefetcher= Disabled
HWPM = Native Mode with no legacy
Override OS Energy Performance = Enable
Patrol Scrub  = Disabled
WR CRC feature Control = Disabled
XPT Prefetch = Enable
Sysinfo program /home/Benchmark/speccpu2017-int/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on RX4770M5 Sun Jun  2 18:22:55 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
      4  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU(s):               224
      On-line CPU(s) list: 0-223
      Thread(s) per core:  2
      Core(s) per socket:  28
      Socket(s):           4
      NUMA node(s):        8
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
      Stepping:            6
      CPU MHz:             2200.000
      CPU max MHz:         4000.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            4400.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            39424K
      NUMA node0 CPU(s):   0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
      NUMA node1 CPU(s):   4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
      NUMA node2 CPU(s):   28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
      NUMA node3 CPU(s):   32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
      NUMA node4 CPU(s):   56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
      NUMA node5 CPU(s):   60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
      NUMA node6 CPU(s):   84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
      NUMA node7 CPU(s):   88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
      flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 39424 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
```

(Continued on next page)

Platform Notes (Continued)

```
  node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
  129 133 134 135
  node 0 size: 191959 MB
  node 0 free: 184946 MB
  node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
  132 136 137 138 139
  node 1 size: 193530 MB
  node 1 free: 193135 MB
  node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
  155 156 157 161 162 163
  node 2 size: 193530 MB
  node 2 free: 193283 MB
  node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
  159 160 164 165 166 167
  node 3 size: 193501 MB
  node 3 free: 193225 MB
  node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
  183 184 185 189 190 191
  node 4 size: 193530 MB
  node 4 free: 193189 MB
  node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
  187 188 192 193 194 195
  node 5 size: 193530 MB
  node 5 free: 193180 MB
  node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
  210 211 212 213 217 218 219
  node 6 size: 193530 MB
  node 6 free: 193252 MB
  node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
  209 214 215 216 220 221 222 223
  node 7 size: 193357 MB
  node 7 free: 193109 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  21  21  21  21  21  21
    1:  11  10  21  21  21  21  21  21
    2:  21  21  10  11  21  21  21  21
    3:  21  21  11  10  21  21  21  21
    4:  21  21  21  21  10  11  21  21
    5:  21  21  21  21  11  10  21  21
    6:  21  21  21  21  21  21  10  11
    7:  21  21  21  21  21  21  11  10

From /proc/meminfo
   MemTotal:       1583586320 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB
```

(Continued on next page)

Platform Notes (Continued)

```
 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15"
       VERSION_ID="15"
       PRETTY_NAME="SUSE Linux Enterprise Server 15"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15"

 uname -a:
    Linux RX4770M5 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
 filling

 run-level 3 Jun 2 18:21

 SPEC is set to: /home/Benchmark/speccpu2017-int
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda5      xfs   343G   30G  314G   9% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.3.0 for D3753-C1x
       03/15/2019
   Memory:
    48x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-06-02 05:22:54-0400.
Report generated on 2019-10-01 14:30:59 by CPU2017 PS formatter v6255.
Originally published on 2019-10-01.