SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2288G, 3.70 GHz

SPECrate®2017_int_base =	59.6
SPECrate®2017_int_energy_base =	435
SPECrate®2017_int_peak =	Not Run
SPECrate®2017_int_energy_peak =	Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2019
Hardware Availability: Oct-2019
Software Availability: May-2019

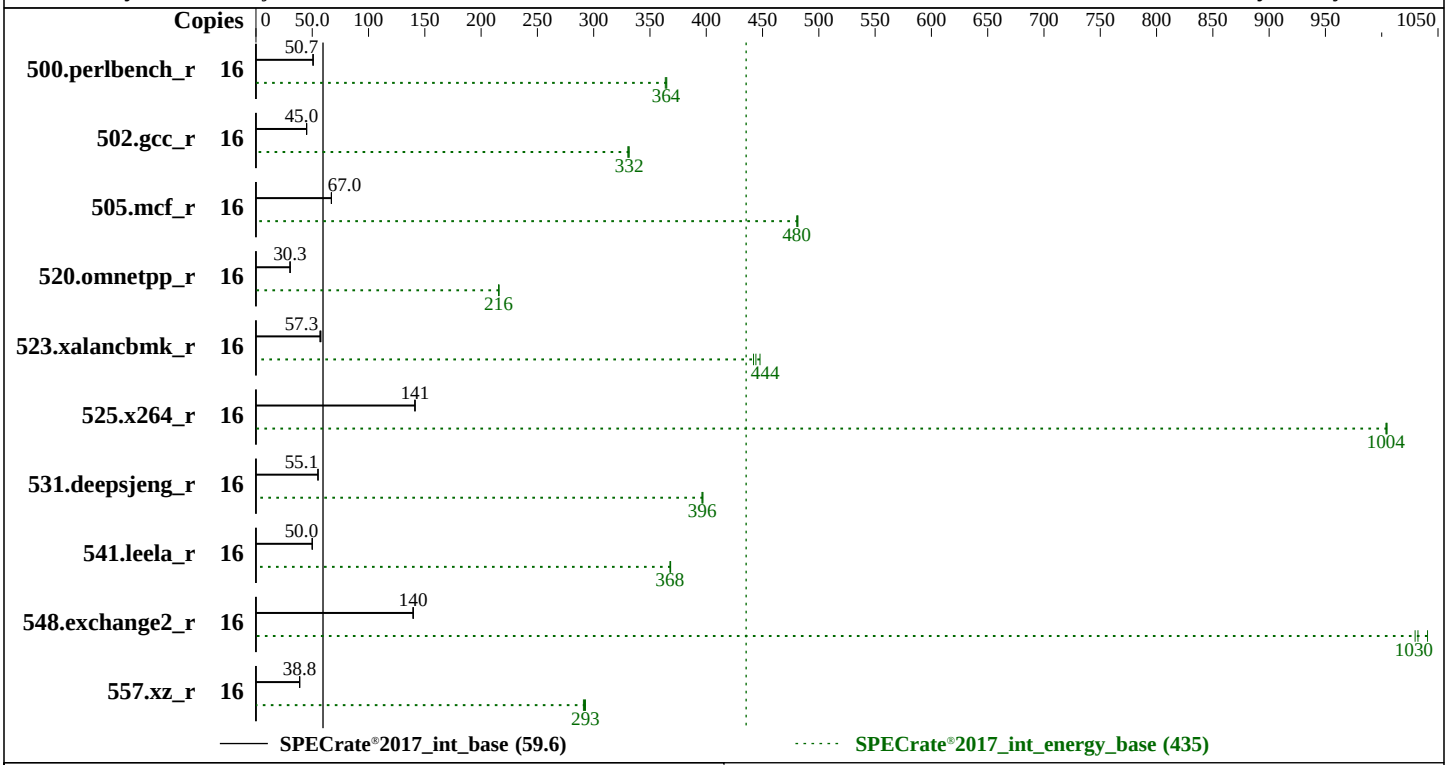

Hardware

CPU Name:	Intel Xeon E-2288G
Max MHz:	5000
Nominal:	3700
Enabled:	8 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	16 MB I+D on chip per chip
Other:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
Storage:	1 x SATA M.2 SSD, 480 GB
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 4.12.14-25.28-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Fujitsu BIOS Version V5.0.0.13 R1.12.0 for D3673-A1x. Released Sep-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	Enabled

Power

Max. Power (W):	194.27
Idle Power (W):	24.11
Min. Temperature (C):	20.50
Elevation (m):	11
Line Standard:	200 V / 50 Hz / 1 phase / 2 wires

(Continued on next page)

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2288G, 3.70 GHz

SPECrate®2017_int_base =	59.6
SPECrate®2017_int_energy_base =	435
SPECrate®2017_int_peak =	Not Run
SPECrate®2017_int_energy_peak =	Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2019
Hardware Availability: Oct-2019
Software Availability: May-2019

Power (Continued)

Provisioning: Line-powered

Power Settings

Management FW: Version 1.60h for D3673-A1x of Fujitsu BMC Firmware
Memory Mode: Normal

Power-Relevant Hardware

Power Supply:	1 x 450 W (non-redundant)
Details:	Standard power supply part of base unit S26361-K1639-V101
Backplane:	4 x 2.5inch HDD back plane
Other Storage:	Embedded SATA Controller
Storage Model #s:	S26361-F5706
NICs Installed:	2 x Intel I210 Springville @ 1 Gb
NICs Enabled (FW/OS):	2 / 2
NICs Connected/Speed:	1 @ 1 Gb
Other HW Model #s:	None

Power Analyzer

Power Analyzer:	10.26.120.153:8888
Hardware Vendor:	Hioki
Model:	Hioki PW3336:1-Channel
Serial Number:	170134584
Input Connection:	USB via USB-Serial CH340
Metrology Institute:	NICT
Calibration By:	HIOKI E.E. CORPORATION
Calibration Label:	H06400087-1901T
Calibration Date:	1-Jan-2019
PTDaemon™ Version:	1.9.1 (a2d19f26; 2019-07-17)
Setup Description:	Connected to PSU 1
Current Ranges Used:	1A
Voltage Range Used:	300V

Temperature Meter

Temperature Meter:	10.26.120.153:8889
Hardware Vendor:	Digi International Inc.
Model:	DigiWATCHPORT_H
Serial Number:	W 640 45112
Input Connection:	USB
PTDaemon Version:	1.9.1 (a2d19f26; 2019-07-17)
Setup Description:	5 mm in front of SUT main air intake

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	16	501	50.8	75.7	365	151	176	503	50.7	76.0	364	151	162	**502**	**50.7**	**75.8**	**364**	**151**	**161**
502.gcc_r	16	504	44.9	74.5	330	148	191	503	45.1	74.4	331	148	189	**503**	**45.0**	**74.2**	**332**	**147**	**191**
505.mcf_r	16	386	67.0	58.8	481	152	193	385	67.1	58.8	481	152	194	**386**	**67.0**	**58.9**	**480**	**153**	**193**
520.omnetpp_r	16	**692**	**30.3**	**105**	**216**	**152**	**159**	691	30.4	105	216	152	159	693	30.3	105	216	152	158
523.xalancbmk_r	16	298	56.8	41.4	442	139	188	**295**	**57.3**	**41.2**	**444**	**140**	**182**	293	57.7	40.9	448	140	189
525.x264_r	16	198	141	30.2	1000	153	182	**198**	**141**	**30.3**	**1000**	**153**	**164**	199	141	30.2	1000	152	183
531.deepsjeng_r	16	**333**	**55.1**	**50.3**	**396**	**151**	**171**	333	55.1	50.2	397	151	170	333	55.1	50.3	396	151	171
541.leela_r	16	530	50.0	77.9	368	147	161	530	50.0	77.8	368	147	161	**530**	**50.0**	**78.0**	**368**	**147**	**161**
548.exchange2_r	16	301	139	44.0	1030	146	169	**300**	**140**	**44.1**	**1030**	**147**	**168**	300	140	43.7	1040	146	169
557.xz_r	16	445	38.9	64.4	292	145	164	**445**	**38.8**	**64.2**	**293**	**144**	**161**	445	38.8	64.6	291	145	168

SPECrate®2017_int_base = 59.6

SPECrate®2017_int_energy_base = 435

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-15
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu2017-1.1.0/lib/intel64:/home/Benchmark/speccpu20
     17-1.1.0/lib/ia32:/home/Benchmark/speccpu2017-1.1.0/je5.0.1-32"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017/lib/intel64"
 Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS configuration:
 Adjacent Cache Line Prefetch = Disabled
 C states = Disabled
 Fan Control = Auto
 Hardware Prefetcher = Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
Intel Virtualization Technology = Disabled
Intel Speed Shift Technology = Disabled

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on TX1320M4 Mon Oct 14 09:44:58 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) E-2288G CPU @ 3.70GHz
      1  "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              16
     On-line CPU(s) list: 0-15
     Thread(s) per core:  2
     Core(s) per socket:  8
     Socket(s):           1
     NUMA node(s):        1
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               158
     Model name:          Intel(R) Xeon(R) E-2288G CPU @ 3.70GHz
     Stepping:            13
     CPU MHz:             3700.000
     CPU max MHz:         5000.0000
     CPU min MHz:         800.0000
     BogoMIPS:            7392.00
     Virtualization:      VT-x
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            256K
     L3 cache:            16384K
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node0 CPU(s):   0-15
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
      sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
      aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
      ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt
      intel_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify
      hwp_act_window hwp_epp flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 16384 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 1 nodes (0)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    node 0 size: 63885 MB
    node 0 free: 63384 MB
    node distances:
    node   0
      0:  10

  From /proc/meminfo
     MemTotal:       65418524 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15"
        VERSION_ID="15"
        PRETTY_NAME="SUSE Linux Enterprise Server 15"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15"

  uname -a:
     Linux TX1320M4 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
     x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)

Platform Notes (Continued)

```
Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:         No status reported
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
                                          RSB filling

run-level 3 Oct 14 02:15

SPEC is set to: /home/Benchmark/speccpu2017-1.1.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sdb4      xfs   191G   79G  113G  42% /home

From /sys/devices/virtual/dmi/id
    BIOS:    FUJITSU // American Megatrends Inc. V5.0.0.13 R1.12.0 for D3673-A1x
              09/06/2019
    Vendor:  FUJITSU
    Product: PRIMERGY TX1320 M4
    Product Family: SERVER
    Serial:  YMJKXXXXXX

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667

(End of data from sysinfo program)
```

Power Settings Notes

PTDaemon to measure power and temperature was run on a PRIMERGY RX2530 M5 as a controller with 2x Intel Xeon Platinum 8280 CPU and 768 GB of memory using Windows Server 2012 R2.
Power management in the BIOS was default except for any settings mentioned in BIOS Configuration.
No power management settings were set in the management firmware.
The optional optical drive was not installed.
The run was started and observed through the management firmware.

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`

(Continued on next page)

Base Portability Flags (Continued)

502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.2019-11-01.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.2019-11-01.xml

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2288G, 3.70 GHz

SPECrate®2017_int_base =	59.6
SPECrate®2017_int_energy_base =	435
SPECrate®2017_int_peak =	Not Run
SPECrate®2017_int_energy_peak =	Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2019
Hardware Availability: Oct-2019
Software Availability: May-2019

PTDaemon, SPEC CPU, and SPECrate are trademarks or registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-13 20:44:57-0400.
Report generated on 2019-11-01 10:43:31 by CPU2017 PS formatter v6255.
Originally published on 2019-11-01.