SPEC CPU®2017 Integer Rate Result

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6234, 3.30 GHz

SPECrate®2017_int_base = 125

SPECrate®2017_int_peak = Not Run

CPU2017 License:	19	**Test Date:**	Nov-2019
Test Sponsor:	Fujitsu	**Hardware Availability:**	May-2019
Tested by:	Fujitsu	**Software Availability:**	May-2019

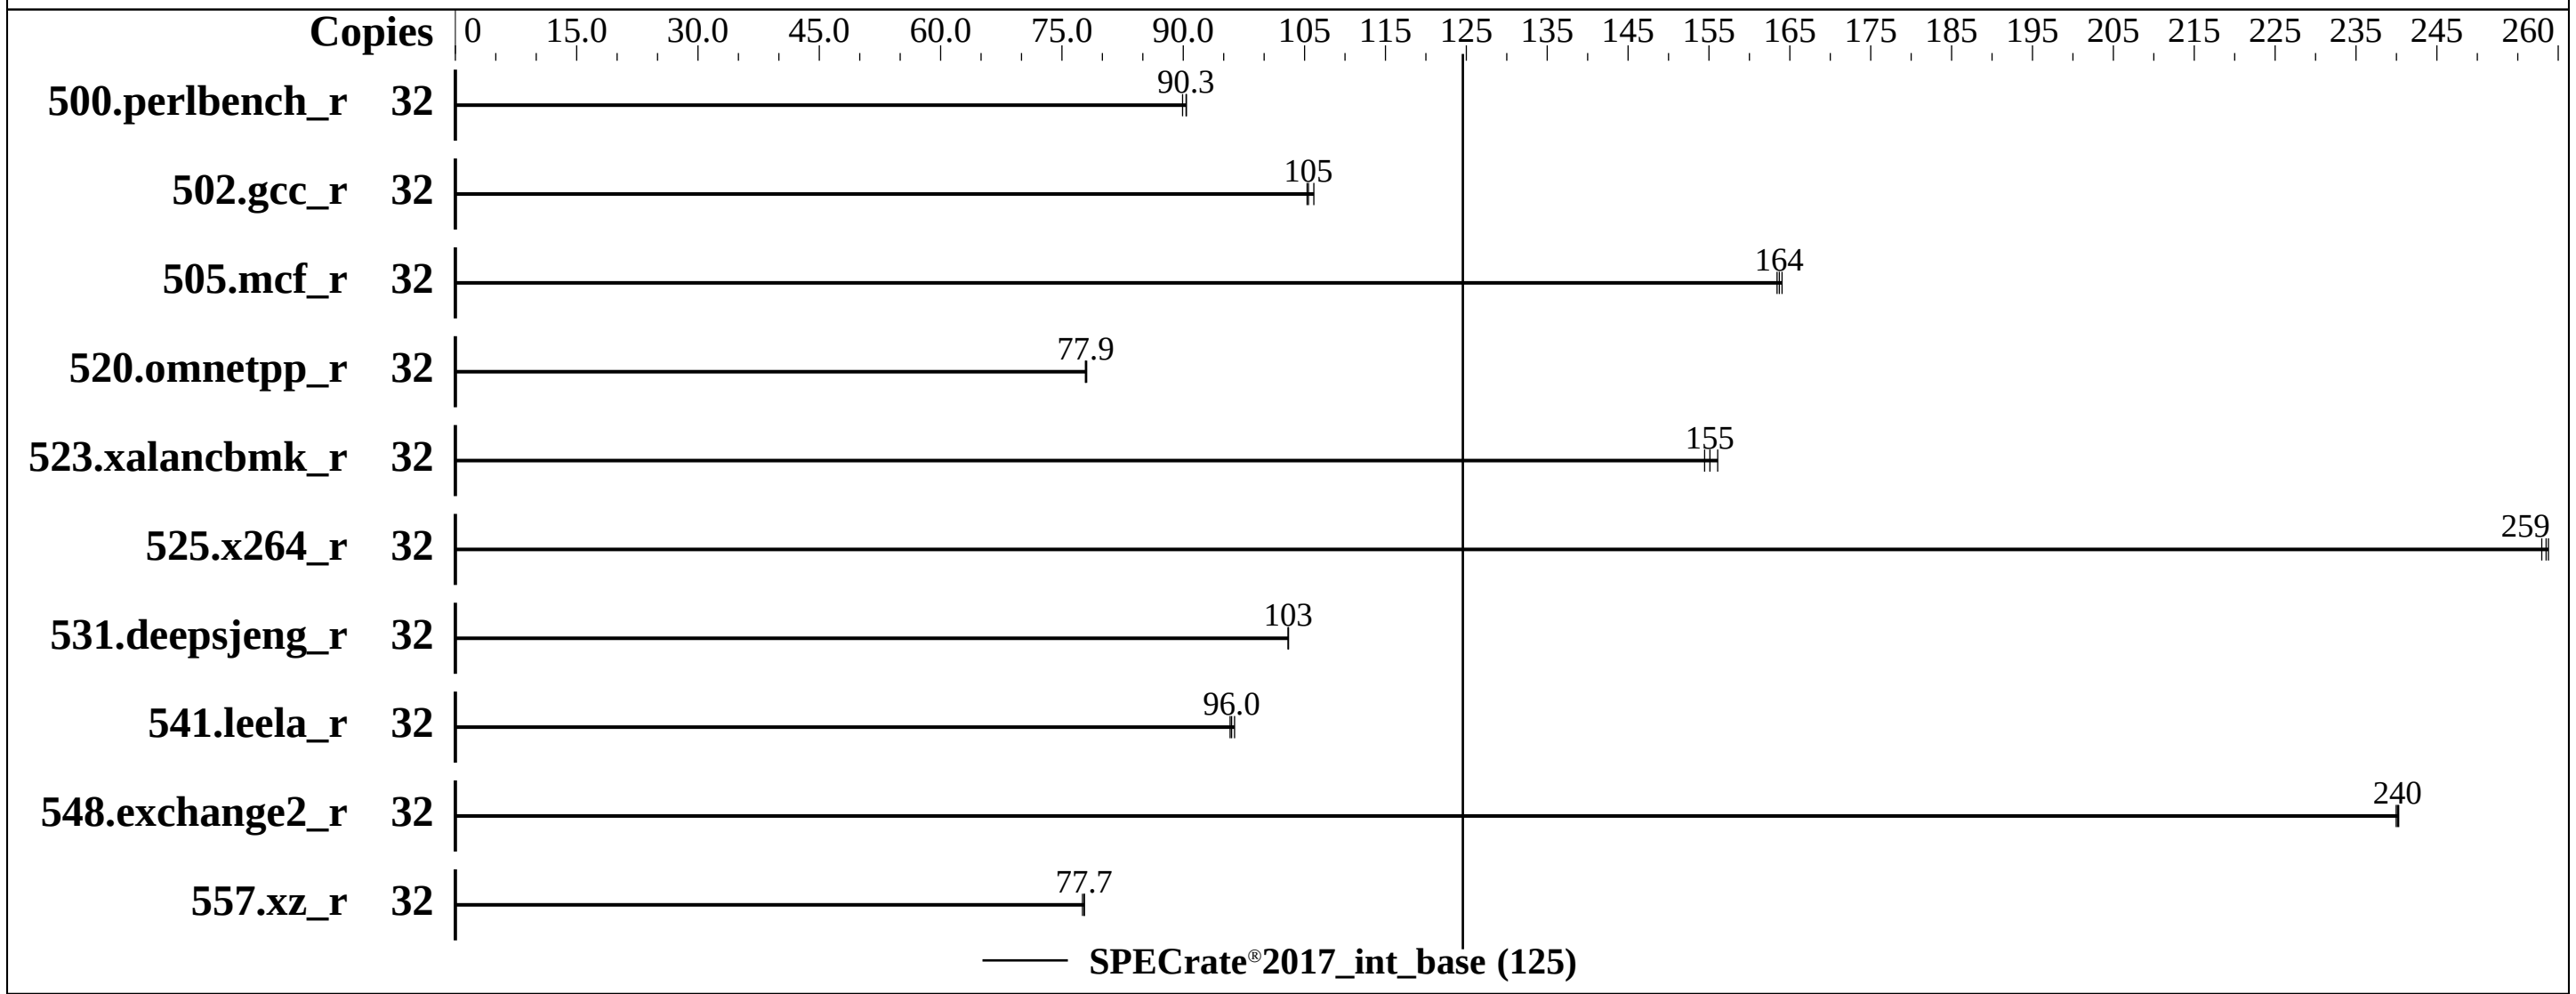

Hardware

CPU Name:	Intel Xeon Gold 6234
Max MHz:	4000
Nominal:	3300
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	24.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x SATA M.2 SSD, 150 GB
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 4.12.14-25.28-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	Fujitsu BIOS Version V5.0.0.14 R1.15.0 for D3384-B1x, released Oct-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Fujitsu
PRIMERGY RX2540 M5, Intel Xeon Gold 6234, 3.30 GHz

SPECrate®2017_int_base = 125
SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Nov-2019
Hardware Availability: May-2019
Software Availability: May-2019

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
500.perlbench_r	32	567	89.9	564	90.4	**564**	**90.3**							
502.gcc_r	32	**430**	**105**	427	106	430	105							
505.mcf_r	32	315	164	**316**	**164**	316	163							
520.omnetpp_r	32	539	77.9	**539**	**77.9**	538	78.1							
523.xalancbmk_r	32	**218**	**155**	219	154	217	156							
525.x264_r	32	217	259	**217**	**259**	217	258							
531.deepsjeng_r	32	**356**	**103**	356	103	356	103							
541.leela_r	32	553	95.8	550	96.3	**552**	**96.0**							
548.exchange2_r	32	**349**	**240**	349	240	349	240							
557.xz_r	32	**445**	**77.7**	446	77.5	444	77.8							

SPECrate®2017_int_base = 125
SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-31
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/Benchmark/SPECCPU2017-1.1.0/lib/intel64:/home/Benchmark/SPECCPU20
     17-1.1.0/lib/ia32:/home/Benchmark/SPECCPU2017-1.1.0/je5.0.1-32"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/SPECCPU2017-1.1.0/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS configuration:
 Intel Virtualization Technology = Disabled
 VT-d = Disabled
 CPU C1E Support = Disabled
 LLC Dead Line Alloc = Disabled
 LLC prefetch = Enabled
 Patrol Scrub = Disabled
 WR CRC feature Control = Disabled
 Fan Control = Full

 Sysinfo program /home/Benchmark/SPECCPU2017-1.1.0/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-871b Thu Nov 21 05:49:52 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6234 CPU @ 3.30GHz
       2  "physical id"s (chips)
       32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 2 3 17 24 25 26 27
       physical 1: cores 1 2 4 9 20 25 26 27

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
```


(Continued on next page)

Platform Notes (Continued)

```
      CPU(s):                32
      On-line CPU(s) list:   0-31
      Thread(s) per core:    2
      Core(s) per socket:    8
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6234 CPU @ 3.30GHz
      Stepping:              7
      CPU MHz:               3300.000
      CPU max MHz:           4000.0000
      CPU min MHz:           1200.0000
      BogoMIPS:              6600.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              25344K
      NUMA node0 CPU(s):     0,3-5,16,19-21
      NUMA node1 CPU(s):     1,2,6,7,17,18,22,23
      NUMA node2 CPU(s):     8,9,11,13,24,25,27,29
      NUMA node3 CPU(s):     10,12,14,15,26,28,30,31
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
      ospke avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 25344 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 3 4 5 16 19 20 21
   node 0 size: 192041 MB
   node 0 free: 191724 MB
   node 1 cpus: 1 2 6 7 17 18 22 23
```

(Continued on next page)

Platform Notes (Continued)

```
    node 1 size: 193534 MB
    node 1 free: 193278 MB
    node 2 cpus: 8 9 11 13 24 25 27 29
    node 2 size: 193504 MB
    node 2 free: 193313 MB
    node 3 cpus: 10 12 14 15 26 28 30 31
    node 3 size: 193533 MB
    node 3 free: 193334 MB
    node distances:
    node   0   1   2   3
      0:  10  11  21  21
      1:  11  10  21  21
      2:  21  21  10  11
      3:  21  21  11  10

  From /proc/meminfo
     MemTotal:       791157536 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15"
        VERSION_ID="15"
        PRETTY_NAME="SUSE Linux Enterprise Server 15"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15"

  uname -a:
     Linux linux-871b 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):         Not affected
  Microarchitectural Data Sampling:          No status reported
  CVE-2017-5754 (Meltdown):                  Not affected
  CVE-2018-3639 (Speculative Store Bypass): Vulnerable
  CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
                                             RSB filling

  run-level 3 Nov 21 05:46
```

(Continued on next page)

Platform Notes (Continued)

```
 SPEC is set to: /home/Benchmark/SPECCPU2017-1.1.0
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      xfs   140G   19G  122G  13% /

 From /sys/devices/virtual/dmi/id
     BIOS:    FUJITSU // American Megatrends Inc. V5.0.0.14 R1.15.0 for D3384-B1x
               10/17/2019
     Vendor:  FUJITSU
     Product: PRIMERGY RX2540 M5
     Product Family: SERVER
     Serial:  YMSQXXXXXX

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
```

(Continued on next page)

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-20 15:49:51-0500.
Report generated on 2019-12-10 14:58:11 by CPU2017 PS formatter v6255.
Originally published on 2019-12-10.