



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016


Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

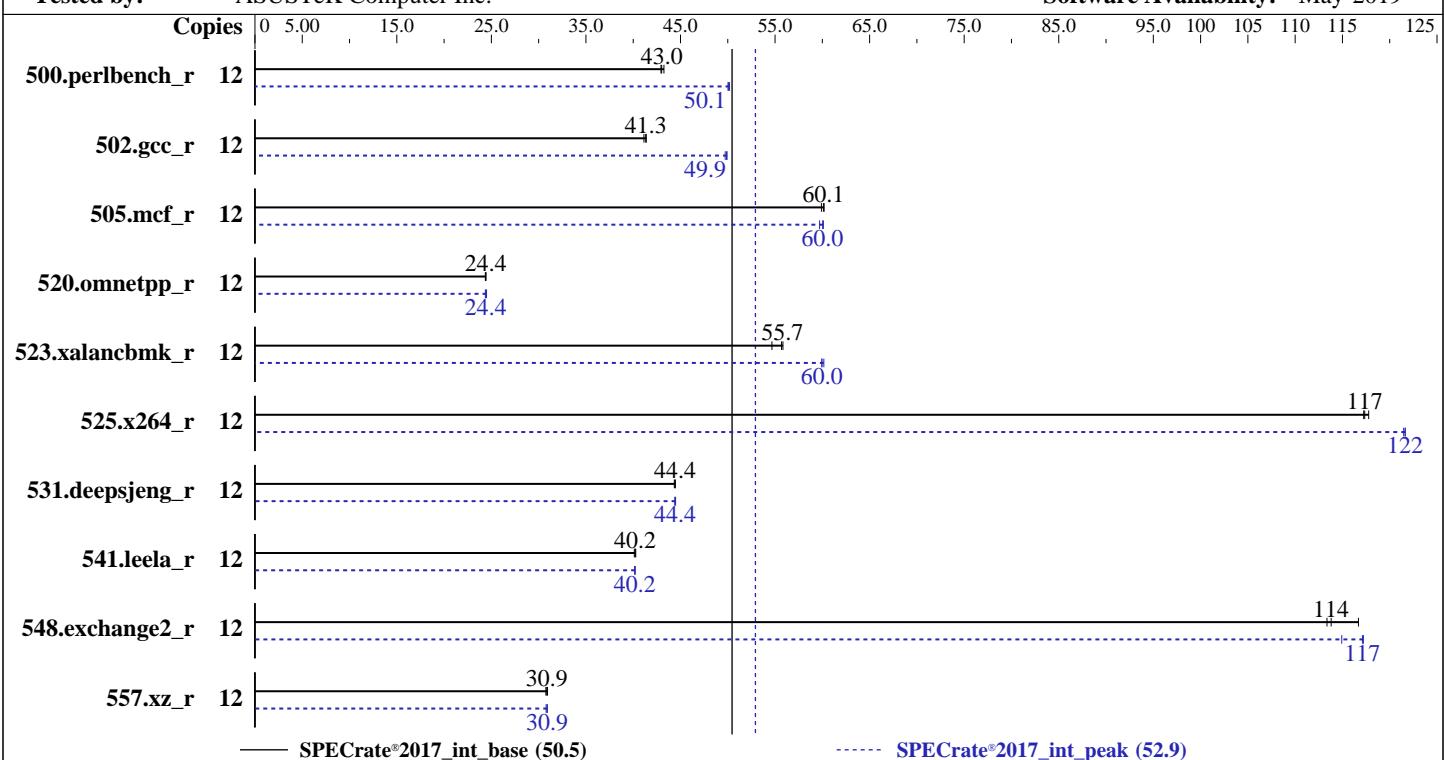

Hardware		Software	
CPU Name:	Intel Xeon E-2236	OS:	SUSE Linux Enterprise Server 15
Max MHz:	4800	Compiler:	Kernel 4.12.14-150.17-default
Nominal:	3400	Parallel:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Enabled:	6 cores, 1 chip, 2 threads/core	Firmware:	Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Orderable:	1 chip	File System:	No
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	Version 3102 released Oct-2019
L2:	256 KB I+D on chip per core	Base Pointers:	xfs
L3:	12 MB I+D on chip per chip	Peak Pointers:	Run level 3 (multi-user)
Other:	None	Other:	64-bit
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)	Power Management:	32/64-bit
Storage:	1 x 1 TB SATA SSD		jemalloc: jemalloc memory allocator library V5.0.1
Other:	None		Prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	442	43.2	444	43.0	445	42.9	12	382	50.1	381	50.2	382	50.0
502.gcc_r	12	411	41.3	411	41.4	413	41.1	12	341	49.9	340	49.9	342	49.7
505.mcf_r	12	324	59.9	322	60.2	323	60.1	12	323	60.0	323	60.1	325	59.7
520.omnetpp_r	12	646	24.4	645	24.4	645	24.4	12	643	24.5	645	24.4	646	24.4
523.xalancbmk_r	12	232	54.7	228	55.7	227	55.8	12	211	60.2	211	59.9	211	60.0
525.x264_r	12	178	118	179	117	179	117	12	173	121	173	122	173	122
531.deepsjeng_r	12	309	44.4	310	44.4	310	44.3	12	309	44.5	309	44.4	310	44.4
541.leela_r	12	494	40.2	493	40.3	495	40.1	12	495	40.2	494	40.2	495	40.2
548.exchange2_r	12	277	113	269	117	276	114	12	268	117	274	115	268	117
557.xz_r	12	419	30.9	420	30.9	421	30.8	12	419	30.9	421	30.8	419	30.9

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/spec2017_110/lib/intel64:/spec2017_110/lib/ia32:/spec2017_110/jet5.0.1-
  32"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

General Notes (Continued)

32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

VT-d = Disabled

Race to Halt (RTH) = Disabled

AES = Disabled

Hardware Prefetcher = Disabled

Adjacent Cache Line Prefetch = Disabled

```
Sysinfo program /spec2017_110/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux-zeo2 Wed Dec 18 13:59:20 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2236 CPU @ 3.40GHz
  1 "physical id"s (chips)
  12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 6
  siblings   : 12
  physical 0: cores 0 1 2 3 4 5
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                12
On-line CPU(s) list:  0-11
Thread(s) per core:   2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

Platform Notes (Continued)

Core(s) per socket: 6
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 158
Model name: Intel(R) Xeon(R) E-2236 CPU @ 3.40GHz
Stepping: 10
CPU MHz: 3400.000
CPU max MHz: 4800.0000
CPU min MHz: 800.0000
BogoMIPS: 6816.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 12288K
NUMA node0 CPU(s): 0-11
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single ptis ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp md_clear flush_lll

/proc/cpuinfo cache data
cache size : 12288 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 64043 MB
node 0 free: 62680 MB
node distances:
node 0
0: 10

From /proc/meminfo
MemTotal: 65580900 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

Platform Notes (Continued)

From /etc/*release* /etc/*version*

os-release:

```
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-zeo2 4.12.14-150.17-default #1 SMP Thu May 2 15:15:46 UTC 2019 (bf13fb8)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):

Mitigation: PTE Inversion; VMX: conditional cache flushes, SMT vulnerable

Microarchitectural Data Sampling:

Mitigation: Clear CPU buffers; SMT vulnerable

CVE-2017-5754 (Meltdown):

Mitigation: PTI

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full generic retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Dec 17 18:43

SPEC is set to: /spec2017_110

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	929G	26G	904G	3%	/

From /sys/devices/virtual/dmi/id

```
BIOS: American Megatrends Inc. 3102 10/04/2019
Vendor: ASUSTeK COMPUTER INC.
Product: P11C-C Series
Product Family: Server
Serial: System Serial Number
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667, configured at 2666
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C      | 502.gcc_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C++    | 523.xalancbmk_r(peak)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 523.xalancbmk_r(peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 548.exchange2_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2019

Hardware Availability: Oct-2019

Software Availability: May-2019

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

Peak Compiler Invocation (Continued)

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/jet.5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.40 GHz, Intel Xeon E-2236)

SPECrate®2017_int_base = 50.5

SPECrate®2017_int_peak = 52.9

CPU2017 License: 9016

Test Date: Dec-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

Peak Optimization Flags (Continued)

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revD.html>
<http://www.spec.org/cpu2017/flags/Intel-ic19.Oul-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revD.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic19.Oul-official-linux64.2019-07-09.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-18 00:59:20-0500.

Report generated on 2020-01-23 11:35:58 by CPU2017 PDF formatter v6255.

Originally published on 2020-01-22.