



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2020

Hardware Availability: Oct-2019

Software Availability: May-2019

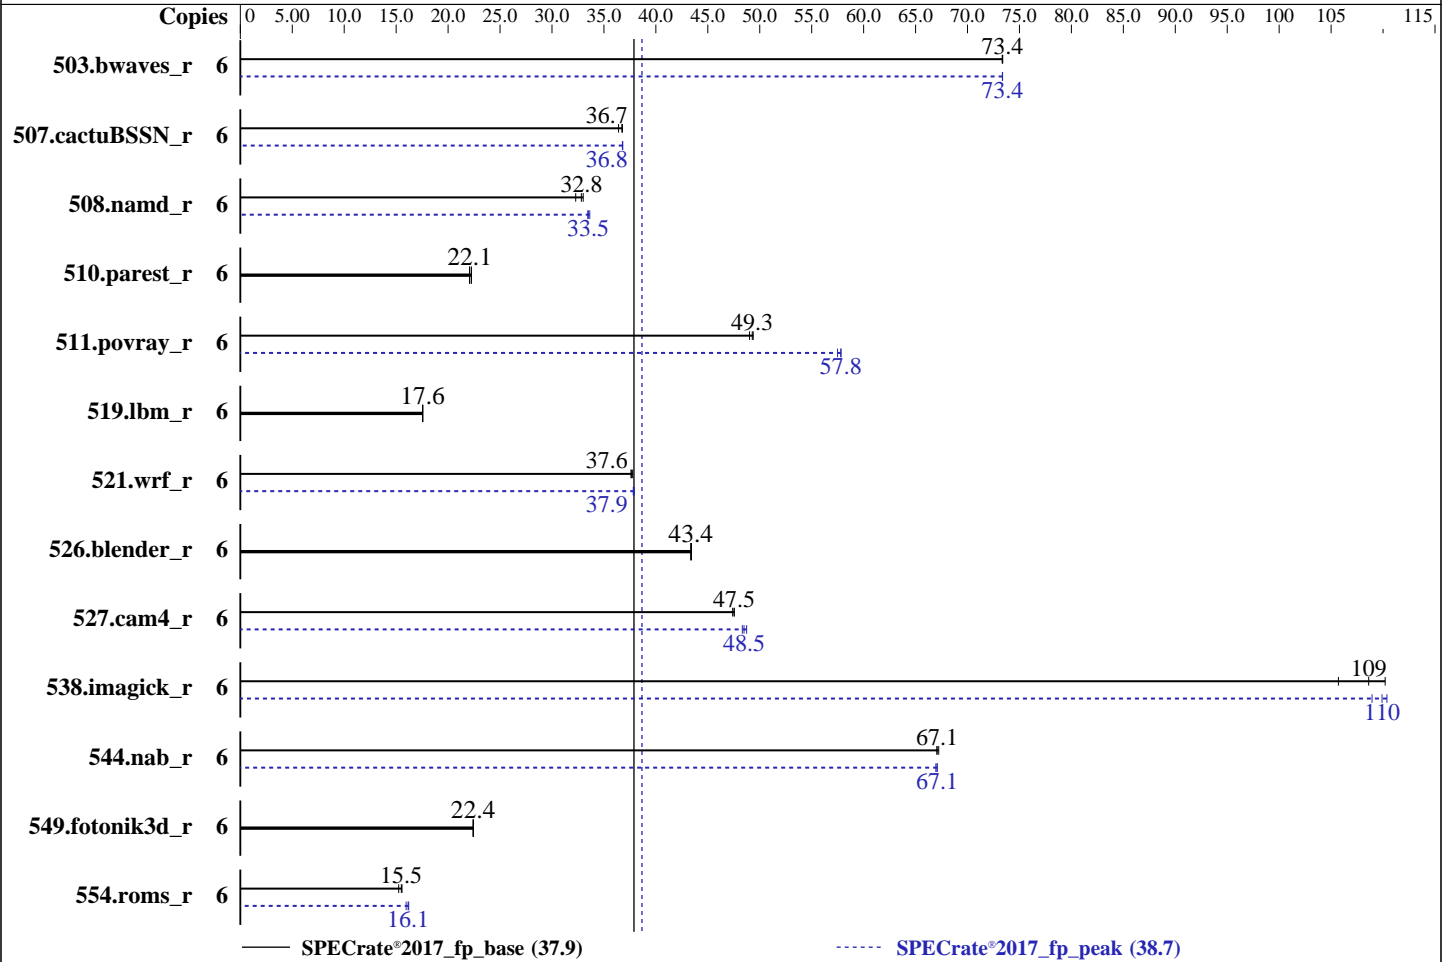

### Hardware

CPU Name: Intel Xeon E-2236  
 Max MHz: 4800  
 Nominal: 3400  
 Enabled: 6 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
 Storage: 1 x SATA M.2 SSD, 480 GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
 4.12.14-25.28-default  
 Compiler: C/C++: Version 19.0.4.227 of  
 Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.4.227 of  
 Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.13 R1.12.0 for D3673-A1x.  
 Released Sep-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Jan-2020  
Hardware Availability: Oct-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	6	820	73.4	<b>820</b>	<b>73.4</b>	820	73.3	6	820	73.4	<b>820</b>	<b>73.4</b>	820	73.4
507.cactuBSSN_r	6	207	36.8	209	36.4	<b>207</b>	<b>36.7</b>	6	<b>206</b>	<b>36.8</b>	206	36.8	207	36.8
508.namd_r	6	<b>174</b>	<b>32.8</b>	173	33.0	177	32.3	6	169	33.6	<b>170</b>	<b>33.5</b>	170	33.4
510.parest_r	6	<b>711</b>	<b>22.1</b>	705	22.3	711	22.1	6	<b>711</b>	<b>22.1</b>	705	22.3	711	22.1
511.povray_r	6	286	49.0	<b>284</b>	<b>49.3</b>	284	49.4	6	242	57.8	244	57.5	<b>242</b>	<b>57.8</b>
519.lbm_r	6	360	17.6	<b>360</b>	<b>17.6</b>	360	17.5	6	360	17.6	<b>360</b>	<b>17.6</b>	360	17.5
521.wrf_r	6	357	37.6	356	37.8	<b>357</b>	<b>37.6</b>	6	355	37.8	<b>355</b>	<b>37.9</b>	354	37.9
526.blender_r	6	211	43.4	210	43.4	<b>211</b>	<b>43.4</b>	6	211	43.4	210	43.4	<b>211</b>	<b>43.4</b>
527.cam4_r	6	221	47.4	221	47.5	<b>221</b>	<b>47.5</b>	6	217	48.3	<b>216</b>	<b>48.5</b>	215	48.7
538.imagick_r	6	135	110	<b>137</b>	<b>109</b>	141	106	6	137	109	<b>136</b>	<b>110</b>	135	110
544.nab_r	6	151	67.1	150	67.2	<b>151</b>	<b>67.1</b>	6	<b>151</b>	<b>67.1</b>	151	67.1	151	67.0
549.fotonik3d_r	6	<b>1043</b>	<b>22.4</b>	1043	22.4	1043	22.4	6	<b>1043</b>	<b>22.4</b>	1043	22.4	1043	22.4
554.roms_r	6	625	15.2	613	15.6	<b>615</b>	<b>15.5</b>	6	588	16.2	<b>590</b>	<b>16.1</b>	597	16.0

SPECrate®2017\_fp\_base = **37.9**

SPECrate®2017\_fp\_peak = **38.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"  
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32 GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

### General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
AES = Disabled  
DCU Streamer Prefetcher = Disabled  
Fan Control = Full  
Hyper-Threading = Disabled  
Package C-State limit = C0

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on SLES15-BMT Tue Jan 14 17:32:01 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2236 CPU @ 3.40GHz
 1 "physical id"s (chips)
 6 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 6
On-line CPU(s) list: 0-5
Thread(s) per core: 1
Core(s) per socket: 6
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

CPU family:           6
Model:                158
Model name:           Intel(R) Xeon(R) E-2236 CPU @ 3.40GHz
Stepping:             10
CPU MHz:              3400.000
CPU max MHz:          4800.0000
CPU min MHz:          800.0000
BogoMIPS:             6816.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             256K
L3 cache:             12288K
NUMA node0 CPU(s):   0-5
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single pti
ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt
xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
flush_lld

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 63768 MB
node 0 free: 63285 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo
MemTotal:          65299100 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux SLES15-BMT 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Mitigation: PTE Inversion; VMX: vulnerable, SMT
                                         disabled
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):               Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Vulnerable
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Indirect Branch Restricted
                                         Speculation, IBPB: conditional, IBRS_FW, RSB
                                         filling
```

```
run-level 3 Jan 14 17:29
```

```
SPEC is set to: /home/Benchmark/speccpu2017-1.1.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   343G   66G  277G  20% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS: FUJITSU // American Megatrends Inc. V5.0.0.13 R1.12.0 for D3673-A1x
      09/06/2019
Vendor: FUJITSU
Product: PRIMERGY TX1330 M4
Product Family: SERVER
Serial: YMJLXXXXXX
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667
```

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Jan-2020  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

### Compiler Version Notes (Continued)

64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----  
=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

### Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Jan-2020

**Hardware Availability:** Oct-2019

**Software Availability:** May-2019

## Base Portability Flags (Continued)

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

## Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Jan-2020

**Hardware Availability:** Oct-2019

**Software Availability:** May-2019

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2236,  
3.40 GHz

SPECrate®2017\_fp\_base = 37.9

SPECrate®2017\_fp\_peak = 38.7

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2020

Hardware Availability: Oct-2019

Software Availability: May-2019

## Peak Optimization Flags (Continued)

503.bwaves\_r (continued):

```
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-14 03:32:00-0500.

Report generated on 2020-02-04 17:56:02 by CPU2017 PDF formatter v6255.

Originally published on 2020-02-04.