SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017_fp_base = 299

SPECrate®2017_fp_peak = 321

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

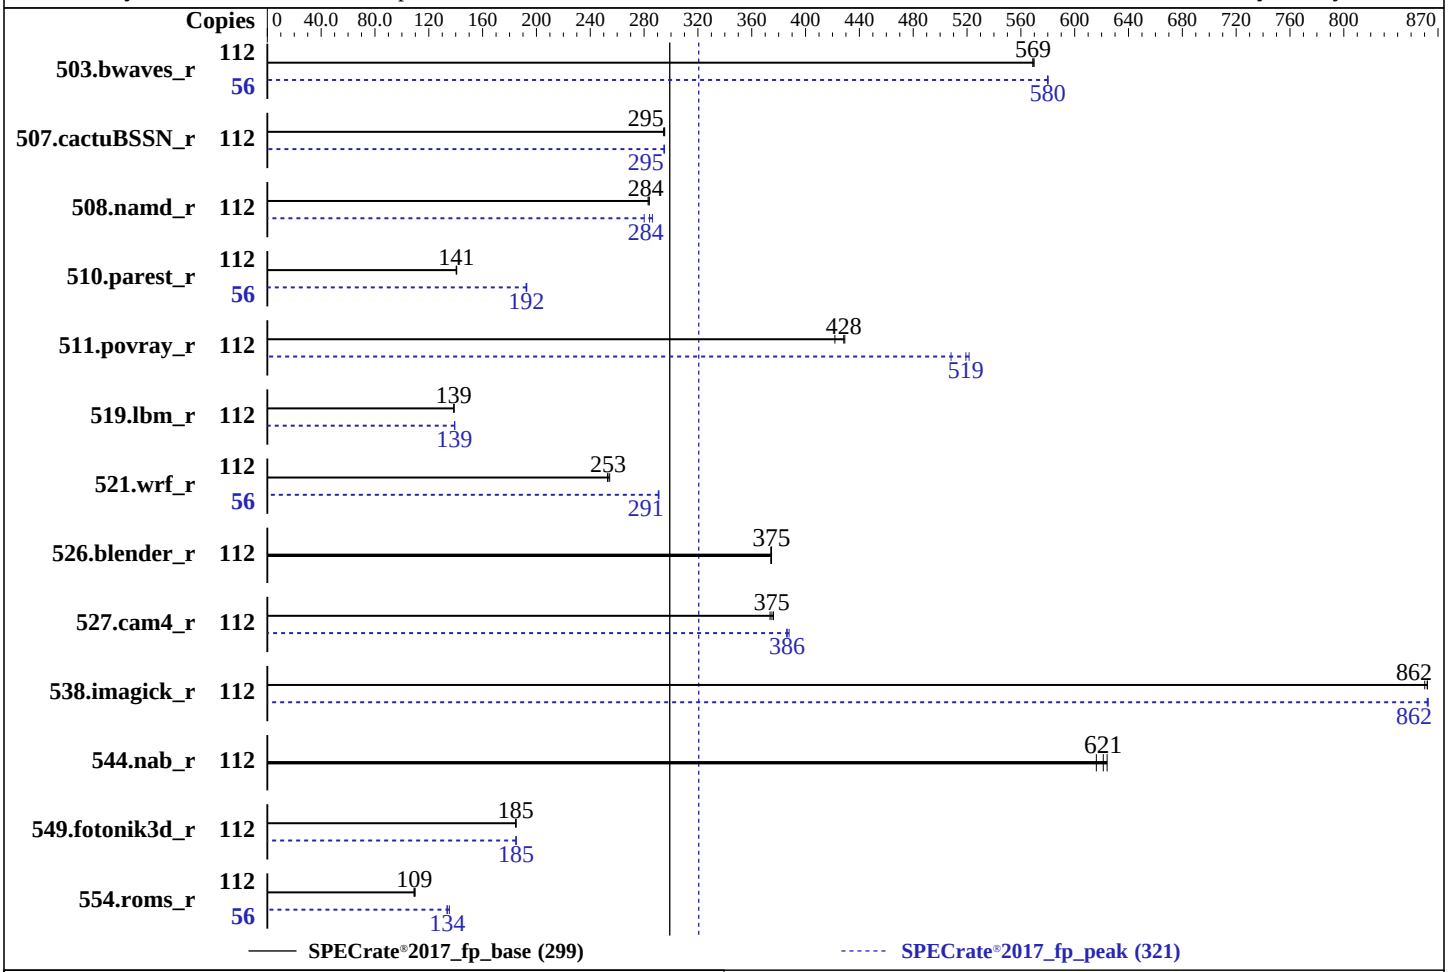

Hardware

CPU Name:	Intel Xeon Gold 6258R
Max MHz:	4000
Nominal:	2700
Enabled:	56 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 1 TB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 Kernel 4.12.14-23-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	Version 6102 released Dec-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017_fp_base = 299

SPECrate®2017_fp_peak = 321

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	**1974**	**569**	1974	569	1971	570	56	968	580	969	580	**968**	**580**
507.cactuBSSN_r	112	481	295	480	295	**481**	**295**	112	481	295	**481**	**295**	480	295
508.namd_r	112	375	284	**375**	**284**	376	283	112	372	286	**375**	**284**	380	280
510.parest_r	112	2088	140	2082	141	**2084**	**141**	56	761	192	**761**	**192**	760	193
511.povray_r	112	609	429	620	422	**611**	**428**	112	501	522	**504**	**519**	515	508
519.lbm_r	112	**851**	**139**	851	139	851	139	112	848	139	849	139	**848**	**139**
521.wrf_r	112	**991**	**253**	993	253	986	254	56	432	291	431	291	**431**	**291**
526.blender_r	112	**455**	**375**	456	374	455	375	112	**455**	**375**	456	374	455	375
527.cam4_r	112	**522**	**375**	521	376	524	374	112	508	386	**507**	**386**	505	388
538.imagick_r	112	**323**	**862**	324	860	323	862	112	323	862	323	863	**323**	**862**
544.nab_r	112	**303**	**621**	306	616	302	624	112	**303**	**621**	306	616	302	624
549.fotonik3d_r	112	**2363**	**185**	2362	185	2365	185	112	**2361**	**185**	2360	185	2362	185
554.roms_r	112	1632	109	**1628**	**109**	1620	110	56	667	133	**664**	**134**	657	135

SPECrate®2017_fp_base = 299

SPECrate®2017_fp_peak = 321

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
 Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017_110/lib/intel64"
```

General Notes

```
 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration:
VT-d = Disabled
Patrol Scrub = Disabled
ENERGY_PERF_BIAS_CFG mode = performance
SNC = Enabled
IMC interleaving = 1-way
Engine Boost = Level3(Max)
Enforce POR = Disable
Memory Frequency = 2933
LLC dead line allc = Disabled
SR-IOV Support = Disabled
CSM Support = Disabled

 Sysinfo program /spec2017_110/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-gh78 Fri Feb 14 09:28:27 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
       2  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:        x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              112
      On-line CPU(s) list: 0-111
      Thread(s) per core:  2
      Core(s) per socket:  28
      Socket(s):           2
      NUMA node(s):        4
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
      Stepping:            7
      CPU MHz:             2700.000
      CPU max MHz:         4000.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            5400.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            39424K
      NUMA node0 CPU(s):   0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
      NUMA node1 CPU(s):   4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
      NUMA node2 CPU(s):   28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
      NUMA node3 CPU(s):   32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
      sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      ibpb ibrs stibp dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
      ospke avx512_vnni arch_capabilities ssbd

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
    79
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 size: 192066 MB
   node 0 free: 191765 MB
   node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
   82 83
   node 1 size: 193520 MB
   node 1 free: 193193 MB
   node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
   101 105 106 107
   node 2 size: 193491 MB
   node 2 free: 193111 MB
   node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
   108 109 110 111
   node 3 size: 193517 MB
   node 3 free: 193233 MB
   node distances:
   node   0   1   2   3
     0:  10  11  21  21
     1:  11  10  21  21
     2:  21  21  10  11
     3:  21  21  11  10

 From /proc/meminfo
    MemTotal:       791138596 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15"
       VERSION_ID="15"
       PRETTY_NAME="SUSE Linux Enterprise Server 15"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15"

 uname -a:
    Linux linux-gh78 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-3620 (L1 Terminal Fault):        No status reported
 Microarchitectural Data Sampling:         No status reported
 CVE-2017-5754 (Meltdown):                 Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
```

(Continued on next page)

Platform Notes (Continued)

```
                                        via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):     Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2):     Mitigation: Indirect Branch Restricted
                                        Speculation, IBPB, IBRS_FW

 run-level 3 Feb 14 09:28

 SPEC is set to: /spec2017_110
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   929G   23G  906G   3% /

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends Inc. 6102 12/19/2019
     Vendor:  ASUSTeK COMPUTER INC.
     Product: Z11PG-D24 Series
     Product Family: Server
     Serial:  System Serial Number

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only`

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-qopt-mem-layout-trans=4

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Peak Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.html
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.xml
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-13 20:28:27-0500.
Report generated on 2021-01-04 17:06:33 by CPU2017 PS formatter v6255.
Originally published on 2020-03-16.