SPEC CPU®2017 Integer Rate Result

Supermicro

SuperServer 2029TP-HC1R (X11DPT-PS, Intel Xeon Gold 5218R)

SPECrate®2017_int_base = 204

SPECrate®2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

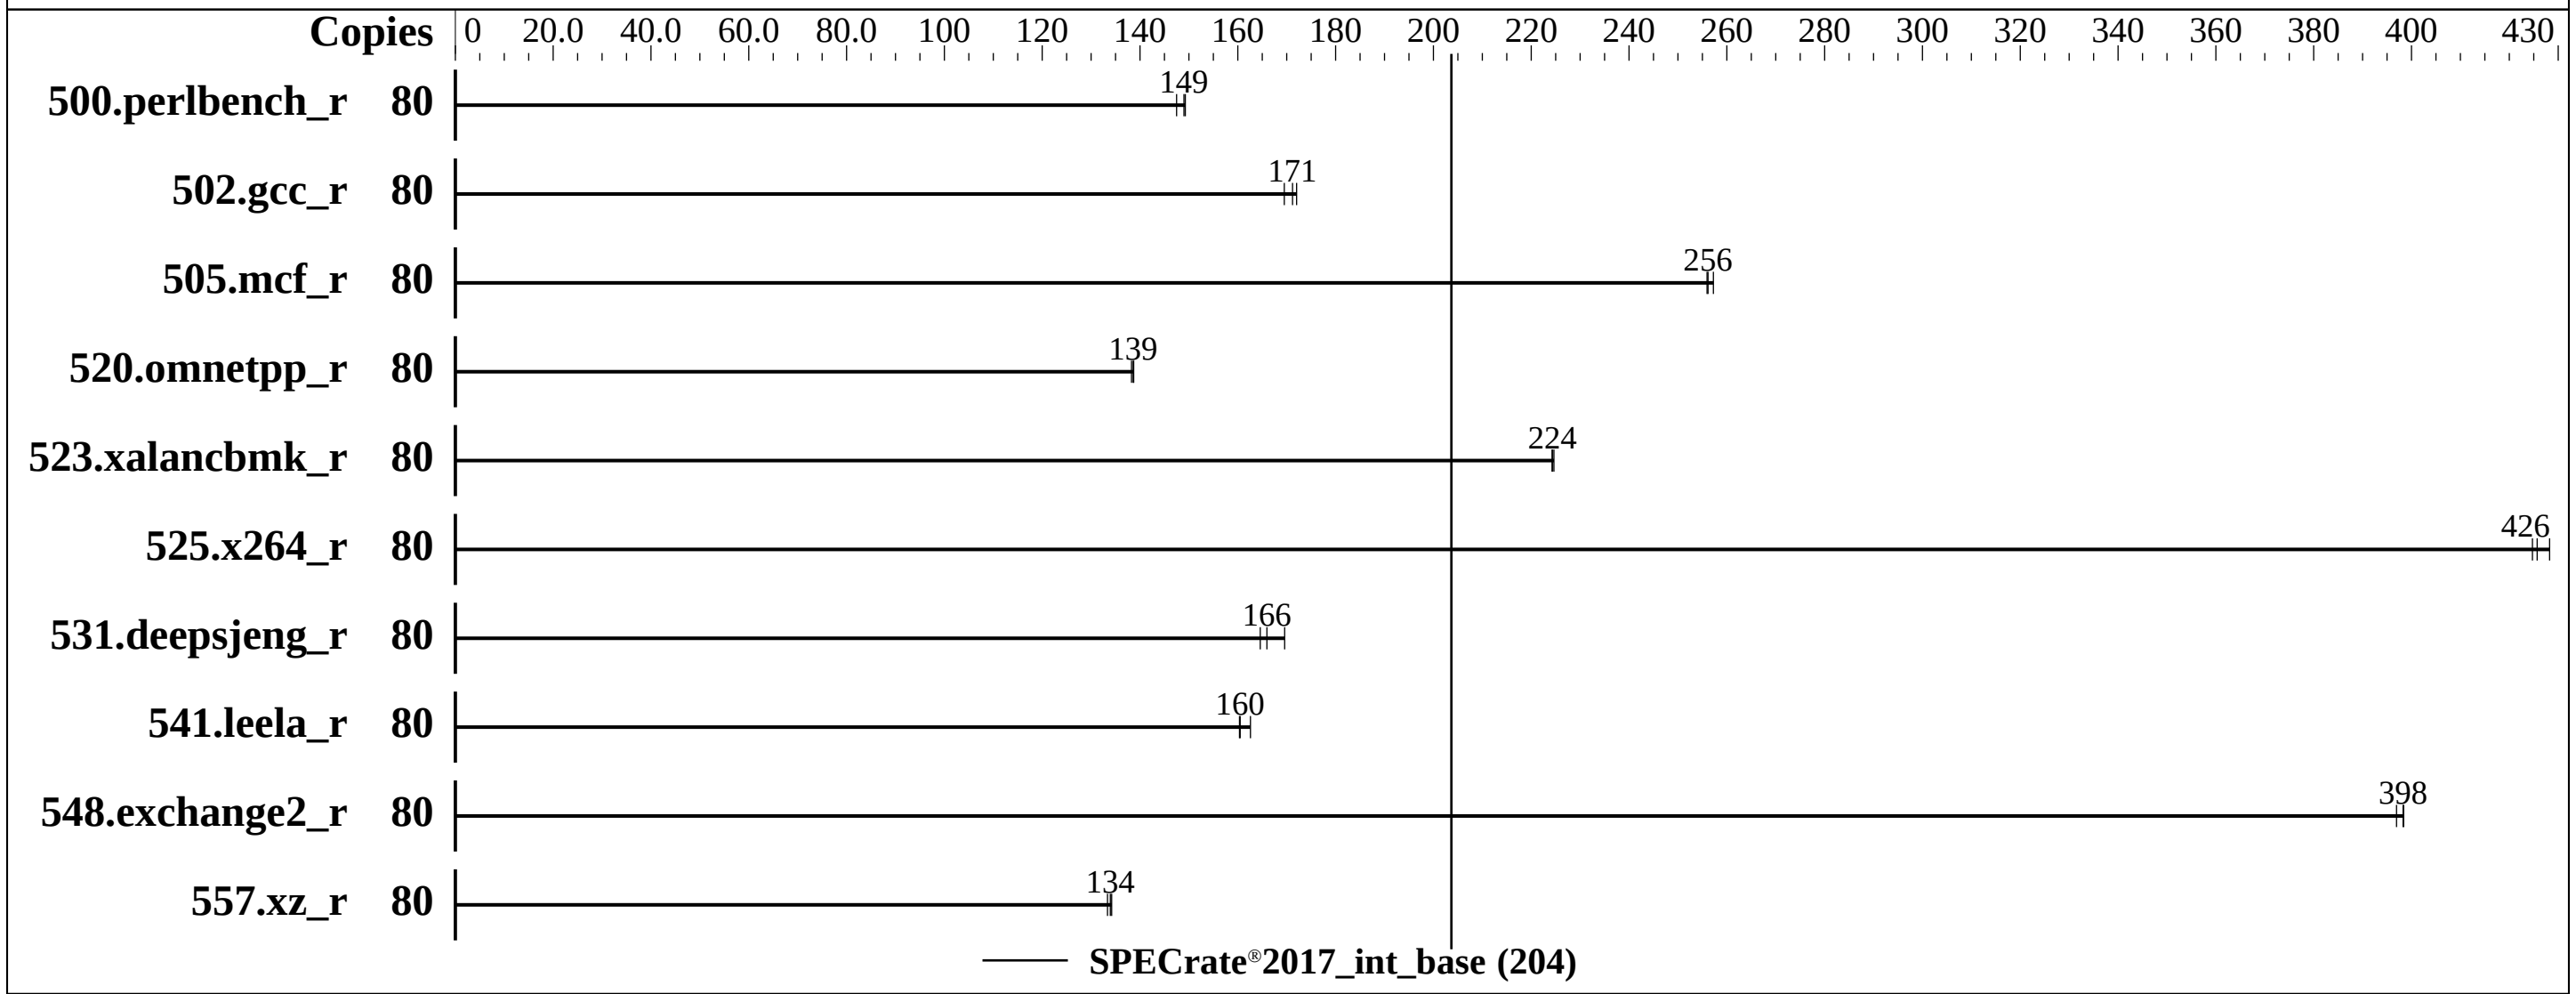

Hardware

CPU Name:	Intel Xeon Gold 5218R
Max MHz:	4000
Nominal:	2100
Enabled:	40 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933V-R, running at 2666)
Storage:	2 x 480 GB SAS SSD, RAID 1
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.6 (Maipo) 3.10.0-957.el7.x86_64
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	version 3.2 released Oct-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to max performance at the cost of additional power usage.

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
500.perlbench_r	80	853	149	**855**	**149**	864	147							
502.gcc_r	80	**662**	**171**	659	172	668	170							
505.mcf_r	80	**505**	**256**	503	257	505	256							
520.omnetpp_r	80	757	139	759	138	**757**	**139**							
523.xalancbmk_r	80	377	224	**377**	**224**	376	225							
525.x264_r	80	327	428	**329**	**426**	330	425							
531.deepsjeng_r	80	541	170	**552**	**166**	557	165							
541.leela_r	80	**826**	**160**	815	163	826	160							
548.exchange2_r	80	**526**	**398**	528	397	526	398							
557.xz_r	80	648	133	**645**	**134**	644	134							

SPECrate®2017_int_base = 204

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/speccpu-1.1.0/lib/intel64:/home/speccpu-1.1.0/lib/ia32:/home/spec
     cpu-1.1.0/je5.0.1-32"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
 is mitigated in the system as tested and documented.
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

Platform Notes

```
BIOS Settings:
Monitor/Mwait = Disable
Intel Virtualization Technology = Disable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
Enhanced Halt Stat (C1E) = Disable
SNC = Enable
Stale Atos = Enable
LLC Dead Line Alloc = Disable
IMC Interleaving = 1-way Interleave
ADDDC Sparing = Disable
Patrol Scrub = Disable

 Sysinfo program /home/speccpu-1.1.0/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on 200-131.pnet Wed Feb 12 11:36:11 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
       2  "physical id"s (chips)
       80 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 20
       siblings  : 40
       physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
```

(Continued on next page)

Platform Notes (Continued)

```
      Byte Order:            Little Endian
      CPU(s):                80
      On-line CPU(s) list:   0-79
      Thread(s) per core:    2
      Core(s) per socket:    20
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
      Stepping:              7
      CPU MHz:               2100.000
      BogoMIPS:              4200.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              28160K
      NUMA node0 CPU(s):     0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
      NUMA node1 CPU(s):     3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
      NUMA node2 CPU(s):     20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
      NUMA node3 CPU(s):     23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin intel_pt ssbd
      mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
      avx512_vnni spec_ctrl intel_stibp flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 28160 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
   node 0 size: 96932 MB
   node 0 free: 94436 MB
   node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
   node 1 size: 98304 MB
   node 1 free: 95888 MB
```

(Continued on next page)

Platform Notes (Continued)

```
    node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
    node 2 size: 98304 MB
    node 2 free: 95950 MB
    node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
    node 3 size: 98304 MB
    node 3 free: 95937 MB
    node distances:
    node   0   1   2   3
      0:  10  11  21  21
      1:  11  10  21  21
      2:  21  21  10  11
      3:  21  21  11  10

  From /proc/meminfo
     MemTotal:       394826148 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.6 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VARIANT="Server"
        VARIANT_ID="server"
        VERSION_ID="7.6"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
     redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

  uname -a:
     Linux 200-131.pnet 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):         Not affected
  Microarchitectural Data Sampling:          No status reported
  CVE-2017-5754 (Meltdown):                  Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                             via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):         Mitigation: Load fences, __user pointer
                                             sanitization
  CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS
```

(Continued on next page)

Platform Notes (Continued)

```
run-level 3 Feb 12 11:35

SPEC is set to: /home/speccpu-1.1.0
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   380G   24G  356G   7% /home

From /sys/devices/virtual/dmi/id
    BIOS:    American Megatrends Inc. 3.2 10/30/2019
    Vendor:  Supermicro1
    Product: 12345678
    Serial:  87654321

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    4x NO DIMM NO DIMM
    12x SK Hynix HMA84GR7JJR4N-WM 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revF.2020-01-09.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revF.2020-01-09.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-12 14:36:11-0500.
Report generated on 2020-03-17 16:14:15 by CPU2017 PS formatter v6255.
Originally published on 2020-03-17.