



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro


A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

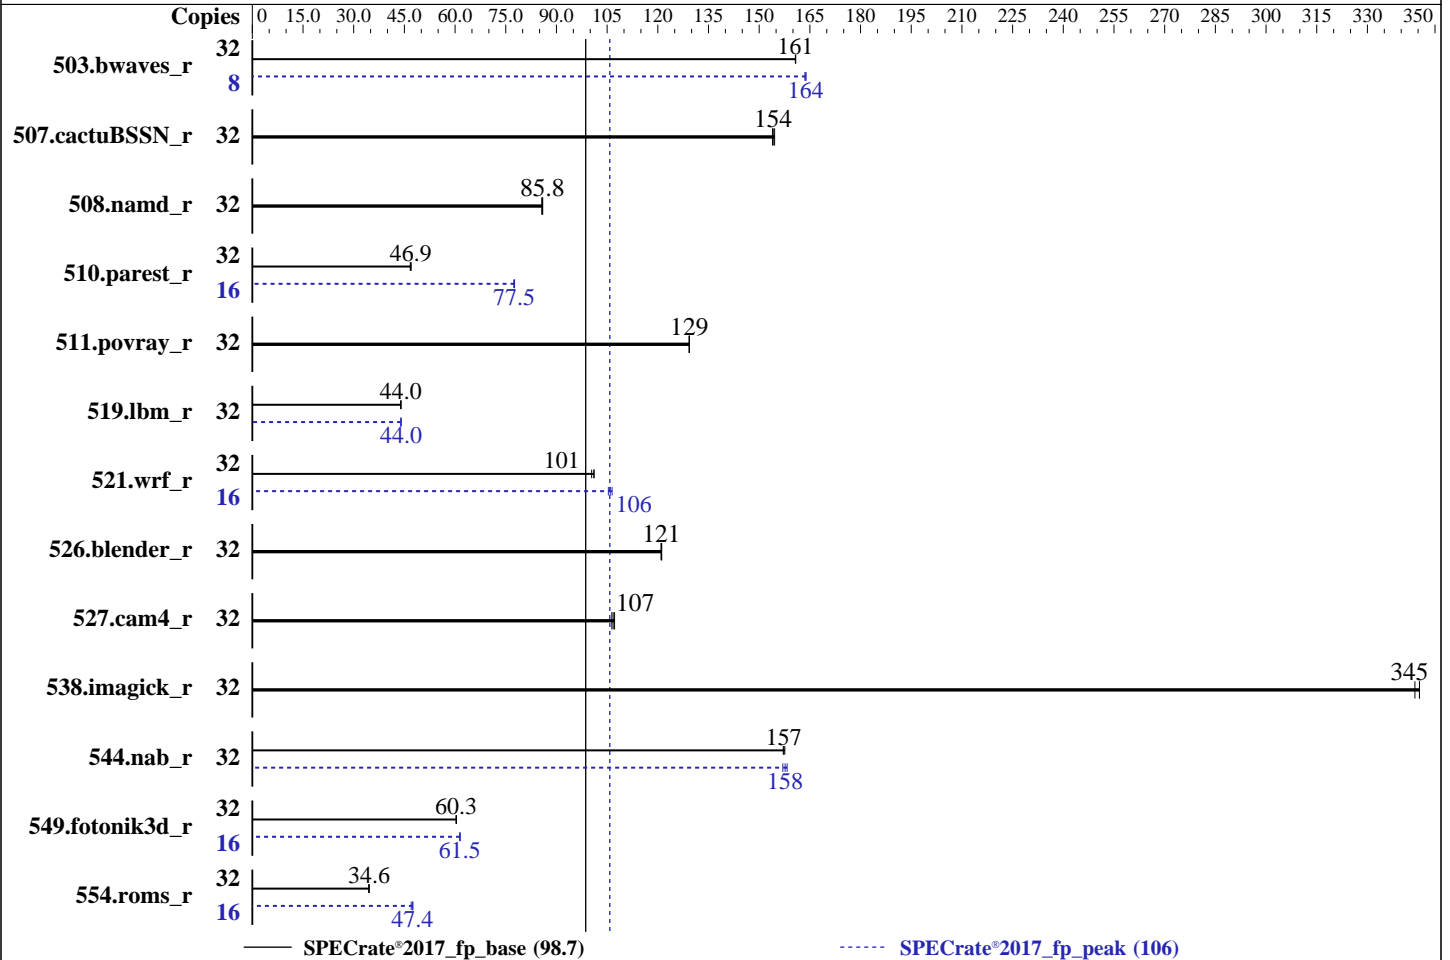

Hardware

CPU Name: AMD EPYC 7282
 Max MHz: 3200
 Nominal: 2800
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 200 GB SATA III SSD
 Other: None

Software

OS: Ubuntu 19.04
 Kernel 5.0.0-25-generic
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.1 released Jan-2020
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|-----------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|------------|-------------|------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 32 | 1996 | 161 | 1995 | 161 | 1997 | 161 | 8 | 491 | 164 | 490 | 164 | 490 | 164 |
| 507.cactuBSSN_r | 32 | 262 | 155 | 263 | 154 | 263 | 154 | 32 | 262 | 155 | 263 | 154 | 263 | 154 |
| 508.namd_r | 32 | 354 | 85.8 | 354 | 85.9 | 355 | 85.7 | 32 | 354 | 85.8 | 354 | 85.9 | 355 | 85.7 |
| 510.parest_r | 32 | 1781 | 47.0 | 1786 | 46.9 | 1791 | 46.7 | 16 | 541 | 77.4 | 540 | 77.5 | 539 | 77.6 |
| 511.povray_r | 32 | 578 | 129 | 578 | 129 | 578 | 129 | 32 | 578 | 129 | 578 | 129 | 578 | 129 |
| 519.lbm_r | 32 | 768 | 43.9 | 767 | 44.0 | 767 | 44.0 | 32 | 767 | 44.0 | 766 | 44.0 | 767 | 44.0 |
| 521.wrf_r | 32 | 709 | 101 | 714 | 100 | 709 | 101 | 16 | 340 | 105 | 338 | 106 | 337 | 106 |
| 526.blender_r | 32 | 402 | 121 | 402 | 121 | 403 | 121 | 32 | 402 | 121 | 402 | 121 | 403 | 121 |
| 527.cam4_r | 32 | 526 | 106 | 524 | 107 | 522 | 107 | 32 | 526 | 106 | 524 | 107 | 522 | 107 |
| 538.imagick_r | 32 | 230 | 345 | 230 | 345 | 231 | 344 | 32 | 230 | 345 | 230 | 345 | 231 | 344 |
| 544.nab_r | 32 | 343 | 157 | 342 | 157 | 342 | 158 | 32 | 340 | 158 | 343 | 157 | 342 | 158 |
| 549.fotonik3d_r | 32 | 2067 | 60.3 | 2067 | 60.3 | 2065 | 60.4 | 16 | 1014 | 61.5 | 1015 | 61.4 | 1015 | 61.5 |
| 554.roms_r | 32 | 1470 | 34.6 | 1477 | 34.4 | 1471 | 34.6 | 16 | 535 | 47.5 | 536 | 47.4 | 541 | 47.0 |

SPECrate®2017_fp_base = **98.7**

SPECrate®2017_fp_peak = **106**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc200_rome_C_lib/64;/home/cpu2017/amd_rate_aoc
c200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 150
Package Power Limit Control = Manual
Package Power Limit = 150
APBDIS = 1

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on h12dst-01 Fri Feb 28 02:42:05 2020

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7282 16-Core Processor
 1 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 1
NUMA node(s): 1
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7282 16-Core Processor
Stepping: 0
CPU MHz: 3137.830
CPU max MHz: 2800.0000
CPU min MHz: 1500.0000
BogoMIPS: 5600.01
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pftreshold avic v_vmsave_vmload vgif umip rdpid
overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31
node 0 size: 257885 MB
node 0 free: 256863 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 264074564 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 19.04
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="19.04 (Disco Dingo)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 19.04"
VERSION_ID="19.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux h12dst-01 5.0.0-25-generic #26-Ubuntu SMP Thu Aug 1 12:04:58 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

Microarchitectural Data Sampling: Not affected
 CVE-2017-5754 (Meltdown): Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Feb 27 09:47

SPEC is set to: /home/cpu2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda2 | ext4 | 183G | 29G | 145G | 17% | / |

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 1.1 01/10/2020
 Vendor: Supermicro
 Product: Super Server
 Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x SK Hynix HMA84GR7CJR4N-XN 32 kB 2 rank 3200

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Fortran, C | 52l.wrf_r(base, peak) 527.cam4_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

538.imagick_r: basepeak = yes

544.nab_r: Same as 519.lbm_r

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -Ofast -march=znver2
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

Fortran benchmarks:

```
503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124BT-HTR
(H12DST-B , AMD EPYC 7282)

SPECrate®2017_fp_base = 98.7

SPECrate®2017_fp_peak = 106

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

521.wrf_r (continued):

```
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -lmvec
-lamdlibm -ljemalloc -lflang
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-27 21:42:04-0500.

Report generated on 2020-03-17 16:19:51 by CPU2017 PDF formatter v6255.

Originally published on 2020-03-17.