# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635
2.80 GHz, AMD EPYC 7282

SPECrate®2017_int_base = 107

SPECrate®2017_int_peak = 115

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2020
**Hardware Availability:** Jan-2020
**Software Availability:** Dec-2019

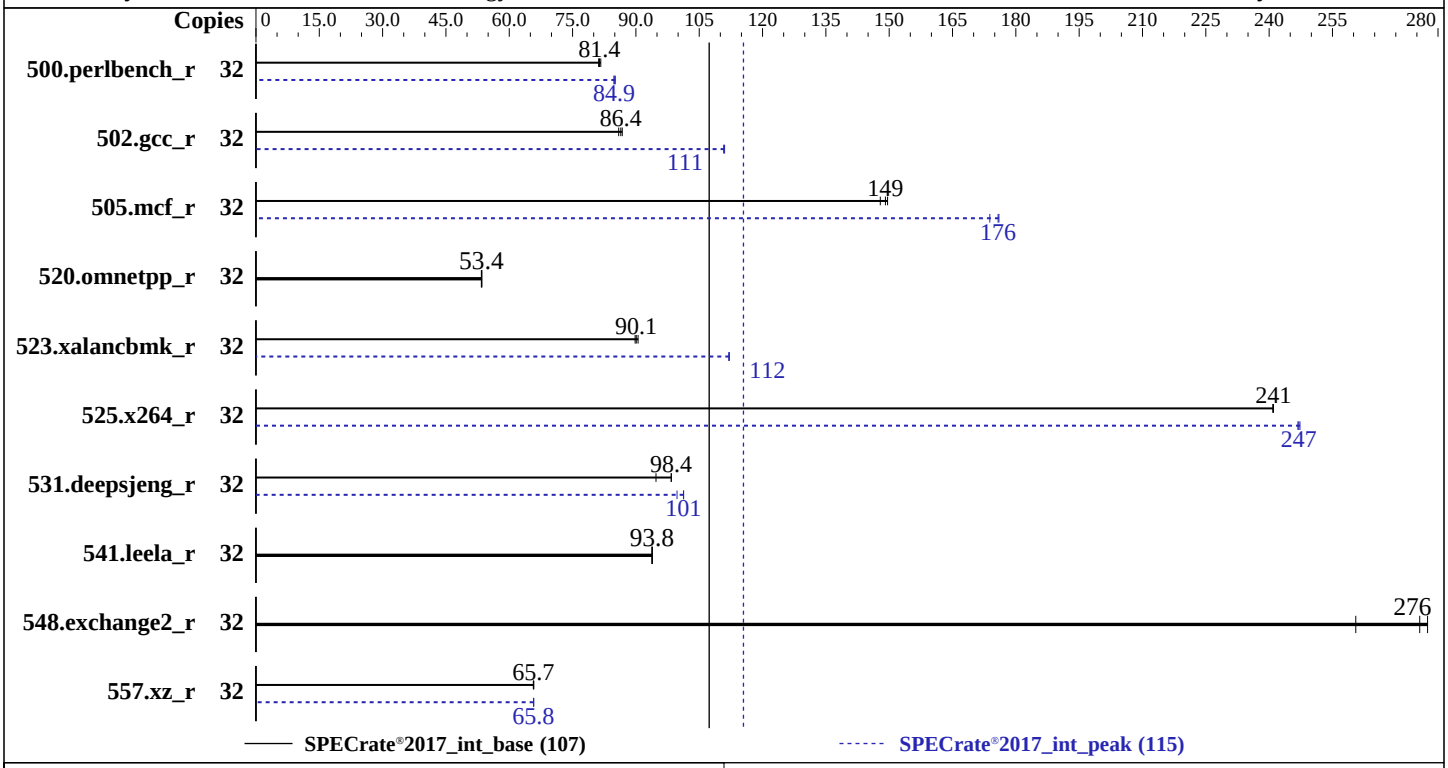


### Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7282 |
| Max MHz: | 3200 |
| Nominal: | 2800 |
| Enabled: | 16 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 64 MB I+D on chip per chip, 16 MB shared / 4 cores |
| Other: | None |
| Memory: | 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 SP5 (x86_64) Kernel 4.12.14-120-default |
| Compiler: | C/C++/Fortran: Version 2.0.0 of AOCC |
| Parallel: | No |
| Firmware: | Lenovo BIOS Version CFE107O released Dec-2019 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc: jemalloc memory allocator library v5.2.0 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635
2.80 GHz, AMD EPYC 7282

SPECrate®2017_int_base = 107

SPECrate®2017_int_peak = 115

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2020
**Hardware Availability:** Jan-2020
**Software Availability:** Dec-2019

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 32 | **626** | **81.4** | 624 | 81.7 | 628 | 81.2 | 32 | 601 | 84.8 | 598 | 85.1 | **600** | **84.9** |
| 502.gcc_r | 32 | 522 | 86.8 | **524** | **86.4** | 527 | 85.9 | 32 | 409 | 111 | 408 | 111 | **409** | **111** |
| 505.mcf_r | 32 | 346 | 150 | 350 | 148 | **347** | **149** | 32 | 294 | 176 | **294** | **176** | 297 | 174 |
| 520.omnetpp_r | 32 | **786** | **53.4** | 786 | 53.4 | 784 | 53.5 | 32 | **786** | **53.4** | 786 | 53.4 | 784 | 53.5 |
| 523.xalancbmk_r | 32 | 373 | 90.5 | 376 | 89.8 | **375** | **90.1** | 32 | 302 | 112 | 301 | 112 | **302** | **112** |
| 525.x264_r | 32 | 232 | 241 | 233 | 241 | **232** | **241** | 32 | 227 | 247 | 227 | 247 | **227** | **247** |
| 531.deepsjeng_r | 32 | **373** | **98.4** | 387 | 94.8 | 373 | 98.4 | 32 | **362** | **101** | 362 | 101 | 368 | 99.7 |
| 541.leela_r | 32 | **565** | **93.8** | 564 | 93.9 | 565 | 93.8 | 32 | **565** | **93.8** | 564 | 93.9 | 565 | 93.8 |
| 548.exchange2_r | 32 | 322 | 261 | 302 | 278 | **304** | **276** | 32 | 322 | 261 | 302 | 278 | **304** | **276** |
| 557.xz_r | 32 | 525 | 65.8 | 526 | 65.7 | **526** | **65.7** | 32 | **525** | **65.8** | 526 | 65.8 | 525 | 65.8 |

**SPECrate®2017_int_base = 107**

**SPECrate®2017_int_peak = 115**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd_rate_aocc200_rome_C_lib/64;
     /home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd_rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

## Platform Notes

```
 BIOS settings:
 Set Operating Mode set to Maximum Performance
 NUMA nodes per socket set to NPS1

 Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C1/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-4au0 Tue Mar  3 21:07:45 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7282 16-Core Processor
       1  "physical id"s (chips)
       32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
```

**(Continued on next page)**

## Platform Notes (Continued)

```
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      Address sizes:       43 bits physical, 48 bits virtual
      CPU(s):              32
      On-line CPU(s) list: 0-31
      Thread(s) per core:  2
      Core(s) per socket:  16
      Socket(s):           1
      NUMA node(s):        1
      Vendor ID:           AuthenticAMD
      CPU family:          23
      Model:               49
      Model name:          AMD EPYC 7282 16-Core Processor
      Stepping:            0
      CPU MHz:             2800.000
      CPU max MHz:         2800.0000
      CPU min MHz:         1500.0000
      BogoMIPS:            5589.84
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            16384K
      NUMA node0 CPU(s):   0-31
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
      skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3
      cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
      cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
      arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
      pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
      smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
```

**(Continued on next page)**

## Platform Notes (Continued)

```
physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
  28 29 30 31
  node 0 size: 257760 MB
  node 0 free: 256994 MB
  node distances:
  node   0
    0:  10

From /proc/meminfo
   MemTotal:       263946828 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 5
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP5"
      VERSION_ID="12.5"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP5"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp5"

uname -a:
   Linux linux-4au0 4.12.14-120-default #1 SMP Thu Nov 7 16:39:09 UTC 2019 (fd9dc36)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:                          Not affected
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                        via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
                                        pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
                                        conditional, IBRS_FW, STIBP: conditional, RSB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                                    filling
 tsx_async_abort:                   Not affected

 run-level 3 Mar 3 21:01

 SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C1
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      xfs   893G   31G  862G   4% /

 From /sys/devices/virtual/dmi/id
     BIOS:    Lenovo             CFE107O 12/28/2019
     Vendor:  Lenovo
     Product: ThinkSystem SR635 -[7Y00000000]-
     Product Family: ThinkSystem
     Serial:  0123456789

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x Samsung M393A4K40DB2-CWE 32 kB 2 rank 3200
     8x Unknown Unknown

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

## Base Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`

**(Continued on next page)**

## Base Portability Flags (Continued)

502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang

C++ benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang

## Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

**(Continued on next page)**

## Peak Optimization Flags (Continued)

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc

505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc

**(Continued on next page)**

## Peak Optimization Flags (Continued)

531.deepsjeng_r: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc -lflang`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

## Peak Other Flags

C benchmarks:

502.gcc_r: `-L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32`

C++ benchmarks:

523.xalancbmk_r: `-L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.html`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-E.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.xml`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-E.xml`


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-03 08:07:44-0500.
Report generated on 2020-03-31 14:57:17 by CPU2017 PS formatter v6255.
Originally published on 2020-03-31.