



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

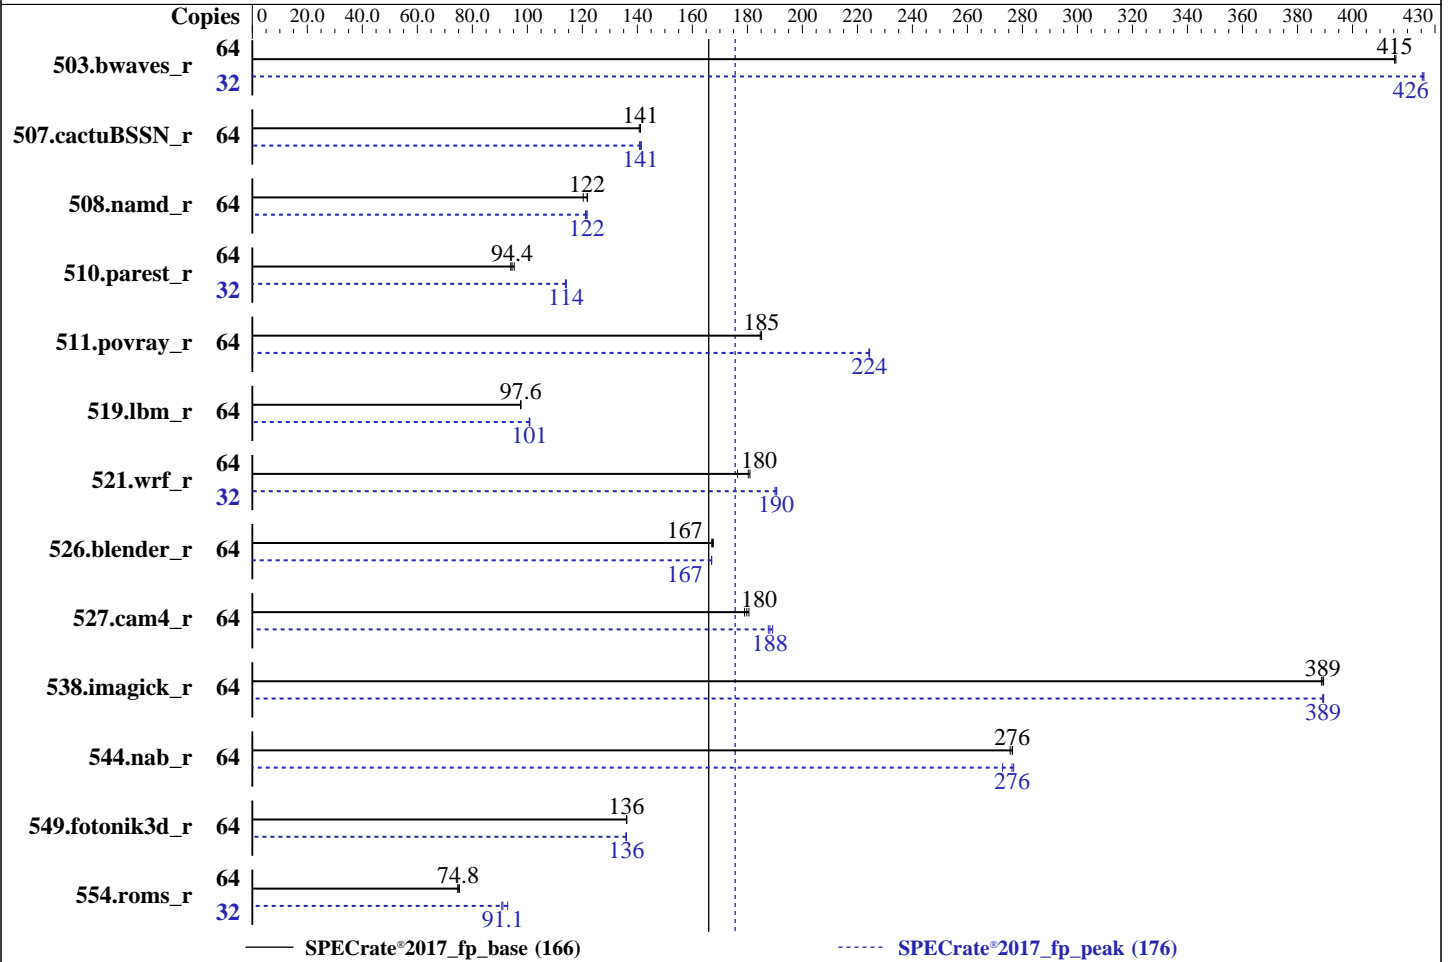

### Hardware

CPU Name: Intel Xeon Silver 4216  
 Max MHz: 3200  
 Nominal: 2100  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)  
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
 Kernel 3.10.0-1062.1.1.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: NEC BIOS Version U30 v2.22 11/13/2019 released Mar-2020  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

CPU2017 License: 9006

Test Date: Mar-2020

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2019

Tested by: NEC Corporation

Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1544	416	1545	415	<b>1545</b>	<b>415</b>	32	754	425	753	426	<b>754</b>	<b>426</b>
507.cactuBSSN_r	64	<b>574</b>	<b>141</b>	574	141	576	141	64	576	141	573	141	<b>574</b>	<b>141</b>
508.namd_r	64	<b>500</b>	<b>122</b>	505	120	499	122	64	500	122	502	121	<b>500</b>	<b>122</b>
510.parest_r	64	1758	95.2	<b>1773</b>	<b>94.4</b>	1782	94.0	32	734	114	736	114	<b>734</b>	<b>114</b>
511.povray_r	64	807	185	<b>807</b>	<b>185</b>	809	185	64	667	224	666	224	<b>666</b>	<b>224</b>
519.lbm_r	64	691	97.6	<b>691</b>	<b>97.6</b>	691	97.6	64	<b>669</b>	<b>101</b>	670	101	669	101
521.wrf_r	64	792	181	<b>795</b>	<b>180</b>	813	176	32	376	191	<b>376</b>	<b>190</b>	377	190
526.blender_r	64	582	168	<b>583</b>	<b>167</b>	584	167	64	584	167	584	167	<b>584</b>	<b>167</b>
527.cam4_r	64	620	181	626	179	<b>623</b>	<b>180</b>	64	597	188	592	189	<b>595</b>	<b>188</b>
538.imagick_r	64	409	390	<b>409</b>	<b>389</b>	409	389	64	409	389	<b>409</b>	<b>389</b>	409	390
544.nab_r	64	390	276	391	276	<b>390</b>	<b>276</b>	64	<b>390</b>	<b>276</b>	395	273	389	277
549.fotonik3d_r	64	1833	136	1832	136	<b>1833</b>	<b>136</b>	64	1834	136	1836	136	<b>1834</b>	<b>136</b>
554.roms_r	64	<b>1359</b>	<b>74.8</b>	1361	74.7	1351	75.3	32	561	90.7	548	92.9	<b>558</b>	<b>91.1</b>

SPECrate®2017\_fp\_base = 166

SPECrate®2017\_fp\_peak = 176

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

### General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling  
Workload Profile: General Throughput Compute  
Memory Patrol Scrubbing: Disabled  
LLC Dead Line Allocation: Disabled  
LLC Prefetch: Enabled  
Enhanced Processor Performance: Enabled  
Workload Profile: Custom  
Advanced Memory Protection: Advanced ECC Support

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on rl20h2m Thu Mar 26 07:47:56 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4216 CPU @ 2.10GHz  
2 "physical id"s (chips)  
64 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 16  
siblings : 32  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

### Platform Notes (Continued)

```

On-line CPU(s) list:    0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Silver 4216 CPU @ 2.10GHz
Stepping:               6
CPU MHz:                2100.000
BogoMIPS:               4200.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               22528K
NUMA node0 CPU(s):     0-7,32-39
NUMA node1 CPU(s):     8-15,40-47
NUMA node2 CPU(s):     16-23,48-55
NUMA node3 CPU(s):     24-31,56-63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
node 0 size: 196265 MB
node 0 free: 191751 MB
node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
node 1 size: 196608 MB
node 1 free: 192199 MB
node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

### Platform Notes (Continued)

```

node 2 size: 196608 MB
node 2 free: 192150 MB
node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
node 3 size: 196607 MB
node 3 free: 192186 MB
node distances:
node 0 1 2 3
0: 10 21 31 31
1: 21 10 31 31
2: 31 31 10 21
3: 31 31 21 10

```

From /proc/meminfo

```

MemTotal:      792280800 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server

```

uname -a:

```

Linux r120h2m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: Load fences, usercopy/swapgs
barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full retpoline, IBPB

```

run-level 3 Mar 26 07:42

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Dec-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	908G	89G	773G	11%	/

```

From /sys/devices/virtual/dmi/id
BIOS: NEC U30 11/13/2019
Vendor: NEC
Product: Express5800/R120h-2M
Serial: JPNLMCR0UF

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)  
Regarding the sysinfo display about the memory speed, the correct configured memory speed is 2400 MT/s. The dmidecode description should be as follows:  
24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933, configured at 2400

### Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
=====

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

### Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
 =====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
 | 554.roms\_r(base, peak)  
 =====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
 =====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
 icc -m64 -std=c11

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Mar-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Sep-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_fp\_base = 166

Express5800/R120h-2M (Intel Xeon Silver 4216)

SPECrate®2017\_fp\_peak = 176

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECrate®2017\_fp\_base = 166**

**Express5800/R120h-2M (Intel Xeon Silver 4216)**

**SPECrate®2017\_fp\_peak = 176**

**CPU2017 License:** 9006

**Test Date:** Mar-2020

**Test Sponsor:** NEC Corporation

**Hardware Availability:** Dec-2019

**Tested by:** NEC Corporation

**Software Availability:** Sep-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-25 18:47:55-0400.

Report generated on 2020-04-14 14:02:23 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.