SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_base = 103

SPECspeed®2017_fp_peak = 103

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2020
Hardware Availability: Apr-2020
Software Availability: Aug-2019

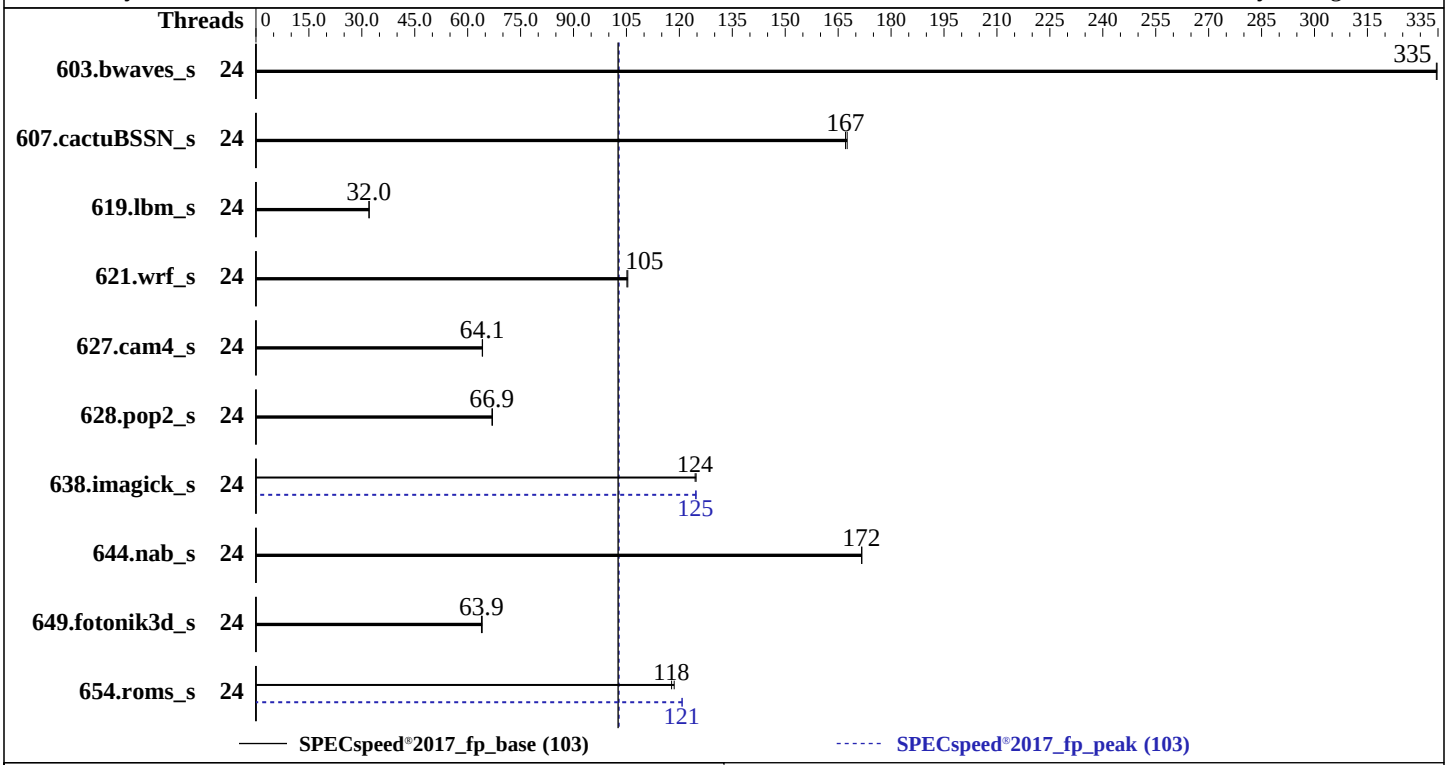

Hardware

CPU Name:	AMD EPYC 7F72
Max MHz:	3700
Nominal:	3200
Enabled:	24 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	192 MB I+D on chip per chip, 16 MB shared / 2 cores
Other:	None
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)
Storage:	1 x 800 GB SAS12 SSD
Other:	None

Software

OS:	Ubuntu 19.04 kernel 5.0.0-16-generic
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.4.4 released Mar-2020
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	**176**	**335**	176	335			24	**176**	**335**	176	335		
607.cactuBSSN_s	24	99.5	168	**99.8**	**167**			24	99.5	168	**99.8**	**167**		
619.lbm_s	24	163	32.1	**164**	**32.0**			24	163	32.1	**164**	**32.0**		
621.wrf_s	24	**126**	**105**	126	105			24	**126**	**105**	126	105		
627.cam4_s	24	138	64.2	**138**	**64.1**			24	138	64.2	**138**	**64.1**		
628.pop2_s	24	177	67.0	**178**	**66.9**			24	177	67.0	**178**	**66.9**		
638.imagick_s	24	**116**	**124**	116	125			24	**116**	**125**	116	125		
644.nab_s	24	102	172	**102**	**172**			24	102	172	**102**	**172**		
649.fotonik3d_s	24	142	64.1	**143**	**63.9**			24	142	64.1	**143**	**63.9**		
654.roms_s	24	133	119	**134**	**118**			24	130	121	**130**	**121**		

SPECspeed®2017_fp_base = 103

SPECspeed®2017_fp_peak = 103

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-23"
LD_LIBRARY_PATH =
     "/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0
     /amd_speed_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "24"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-23"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
  NUMA Nodes Per Socket set to 2
  CCX as NUMA Domain set to Enabled
  System Profile set to Custom
  CPU Power Management set to Maximum Performance
  Memory Frequency set to Maximum Performance
  Turbo Boost Enabled
  Cstates set to Enabled
  Memory Patrol Scrub Disabled
  Memory Refresh Rate set to 1x
```

(Continued on next page)

Platform Notes (Continued)

```
 PCI ASPM L1 Link Power Management Disabled
 Determinism Slider set to Power Determinism
 Efficiency Optimized Mode Disabled
 Logical Processor Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on user-PowerEdge-R6515 Tue Mar 24 07:11:30 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7F72 24-Core Processor
      1  "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 24
      physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     Address sizes:       43 bits physical, 48 bits virtual
     CPU(s):              24
     On-line CPU(s) list: 0-23
     Thread(s) per core:  1
     Core(s) per socket:  24
     Socket(s):           1
     NUMA node(s):        12
     Vendor ID:           AuthenticAMD
     CPU family:          23
     Model:               49
     Model name:          AMD EPYC 7F72 24-Core Processor
     Stepping:            0
     CPU MHz:             2849.879
     BogoMIPS:            6387.85
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
     L3 cache:            16384K
     NUMA node0 CPU(s):   0,1
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node1 CPU(s):   2,3
      NUMA node2 CPU(s):   4,5
      NUMA node3 CPU(s):   6,7
      NUMA node4 CPU(s):   8,9
      NUMA node5 CPU(s):   10,11
      NUMA node6 CPU(s):   12,13
      NUMA node7 CPU(s):   14,15
      NUMA node8 CPU(s):   16,17
      NUMA node9 CPU(s):   18,19
      NUMA node10 CPU(s):  20,21
      NUMA node11 CPU(s):  22,23
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
      smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
      wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
      decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
      overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 12 nodes (0-11)
    node 0 cpus: 0 1
    node 0 size: 21116 MB
    node 0 free: 20849 MB
    node 1 cpus: 2 3
    node 1 size: 21501 MB
    node 1 free: 21394 MB
    node 2 cpus: 4 5
    node 2 size: 21480 MB
    node 2 free: 21372 MB
    node 3 cpus: 6 7
    node 3 size: 21501 MB
    node 3 free: 21334 MB
    node 4 cpus: 8 9
    node 4 size: 21501 MB
    node 4 free: 21325 MB
    node 5 cpus: 10 11
    node 5 size: 21501 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 5 free: 21345 MB
   node 6 cpus: 12 13
   node 6 size: 21501 MB
   node 6 free: 21411 MB
   node 7 cpus: 14 15
   node 7 size: 21501 MB
   node 7 free: 21416 MB
   node 8 cpus: 16 17
   node 8 size: 21504 MB
   node 8 free: 21444 MB
   node 9 cpus: 18 19
   node 9 size: 21501 MB
   node 9 free: 21178 MB
   node 10 cpus: 20 21
   node 10 size: 21501 MB
   node 10 free: 21430 MB
   node 11 cpus: 22 23
   node 11 size: 21489 MB
   node 11 free: 21410 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11
     0:  10  11  11  11  11  11  12  12  12  12  12  12
     1:  11  10  11  11  11  11  12  12  12  12  12  12
     2:  11  11  10  11  11  11  12  12  12  12  12  12
     3:  11  11  11  10  11  11  12  12  12  12  12  12
     4:  11  11  11  11  10  11  12  12  12  12  12  12
     5:  11  11  11  11  11  10  12  12  12  12  12  12
     6:  12  12  12  12  12  12  10  11  11  11  11  11
     7:  12  12  12  12  12  12  11  10  11  11  11  11
     8:  12  12  12  12  12  12  11  11  10  11  11  11
     9:  12  12  12  12  12  12  11  11  11  10  11  11
    10:  12  12  12  12  12  12  11  11  11  11  10  11
    11:  12  12  12  12  12  12  11  11  11  11  11  10

  From /proc/meminfo
     MemTotal:       263785772 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     debian_version: buster/sid
     os-release:
        NAME="Ubuntu"
        VERSION="19.04 (Disco Dingo)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 19.04"
```

(Continued on next page)

Platform Notes (Continued)

```
      VERSION_ID="19.04"
      HOME_URL="https://www.ubuntu.com/"
      SUPPORT_URL="https://help.ubuntu.com/"

 uname -a:
    Linux user-PowerEdge-R6515 5.0.0-16-generic #17-Ubuntu SMP Wed May 15 10:52:21 UTC
    2019 x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-3620 (L1 Terminal Fault):        Not affected
 Microarchitectural Data Sampling:         Not affected
 CVE-2017-5754 (Meltdown):                 Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                           via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline, IBPB:
                                           conditional, IBRS_FW, STIBP: disabled, RSB
                                           filling

 run-level 3 Mar 24 03:47 last=5

 SPEC is set to: /root/cpu2017-1.1.0
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      ext4  732G   32G  663G   5% /

 From /sys/devices/virtual/dmi/id
     BIOS:    Dell Inc. 1.4.4 03/18/2020
     Vendor:  Dell Inc.
     Product: PowerEdge R6515
     Product Family: PowerEdge

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     7x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
     1x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
     8x Not Specified Not Specified

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:
```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:
`-Wno-return-type`

Fortran benchmarks:
`-Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `-flto -Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-region-vectorize`
`-Wl,-mllvm -Wl,-vector-library=LIBMVEC`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`

(Continued on next page)

Peak Optimization Flags (Continued)

638.imagick_s (continued):
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:
`-Wno-return-type`

Fortran benchmarks:
`-Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-24 08:11:30-0400.
Report generated on 2020-04-14 14:10:26 by CPU2017 PS formatter v6255.
Originally published on 2020-04-14.