



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

### Inspur NS5162M5 (Intel Xeon Gold 5218)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation


**SPECrate®2017\_fp\_base = 168**

**SPECrate®2017\_fp\_peak = 178**

**Test Date:** Mar-2020

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

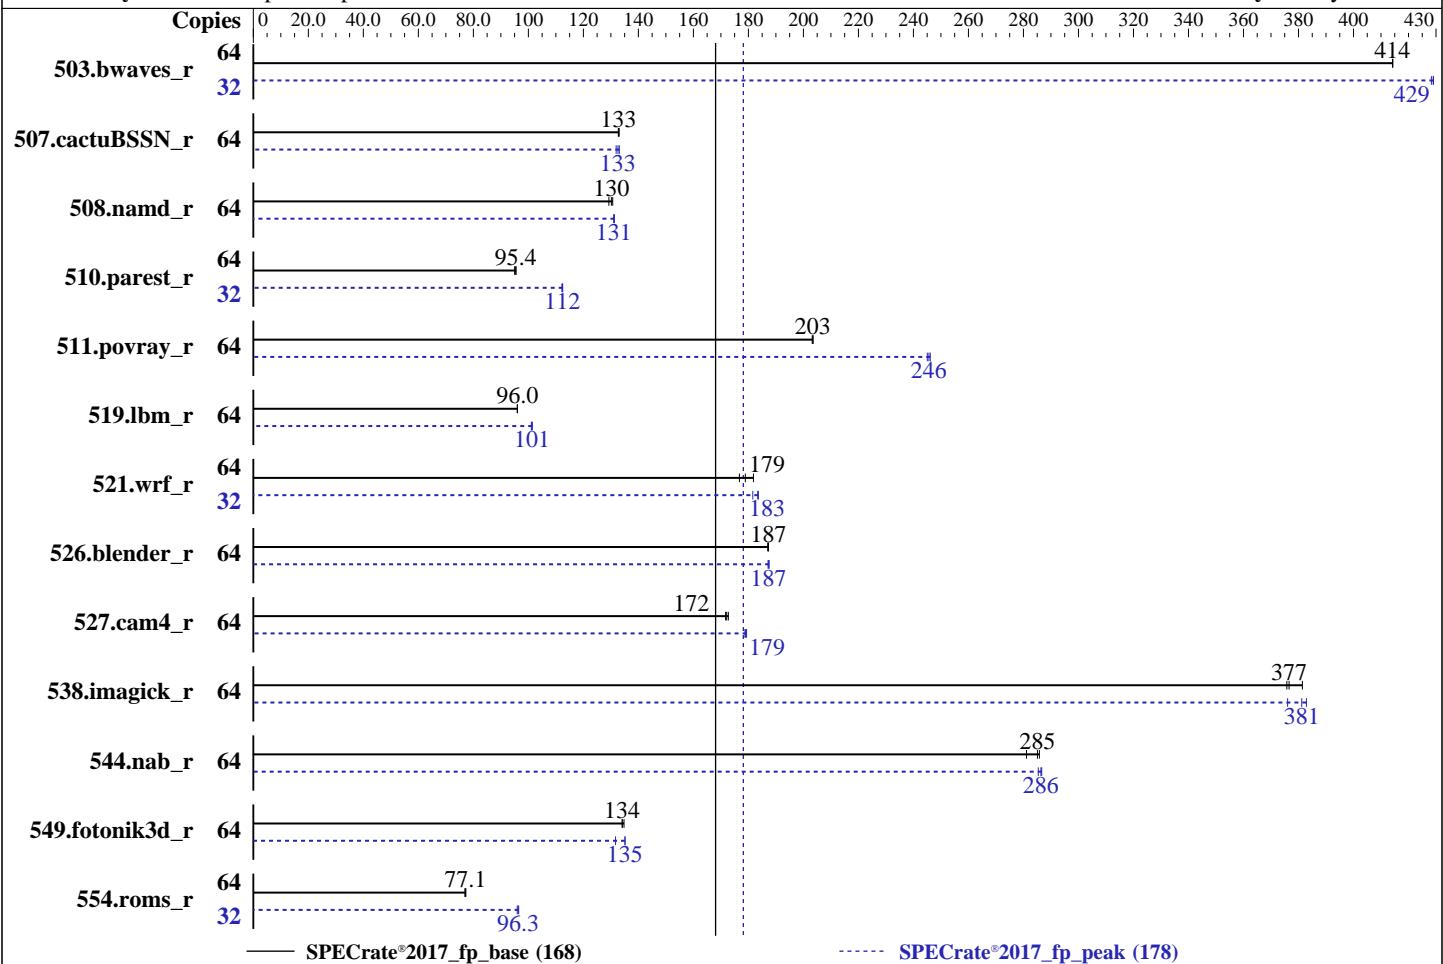

— SPECrate®2017\_fp\_base (168)

····· SPECrate®2017\_fp\_peak (178)

## Hardware

CPU Name: Intel Xeon Gold 5218  
 Max MHz: 3900  
 Nominal: 2300  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP4  
 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 4.1.6 released Jul-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NS5162M5 (Intel Xeon Gold 5218)

**SPECrate®2017\_fp\_base = 168**

**SPECrate®2017\_fp\_peak = 178**

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Results Table

| Benchmark       | Base   |             |            |             |             |             |             | Peak   |             |            |            |             |            |            |
|-----------------|--------|-------------|------------|-------------|-------------|-------------|-------------|--------|-------------|------------|------------|-------------|------------|------------|
|                 | Copies | Seconds     | Ratio      | Seconds     | Ratio       | Seconds     | Ratio       | Copies | Seconds     | Ratio      | Seconds    | Ratio       | Seconds    | Ratio      |
| 503.bwaves_r    | 64     | <b>1549</b> | <b>414</b> | 1549        | 414         | 1550        | 414         | 32     | <b>749</b>  | 428        | <b>748</b> | <b>429</b>  | 748        | 429        |
| 507.cactuBSSN_r | 64     | 611         | 133        | <b>610</b>  | <b>133</b>  | 609         | 133         | 64     | 609         | 133        | 614        | 132         | <b>611</b> | <b>133</b> |
| 508.namd_r      | 64     | <b>467</b>  | <b>130</b> | 465         | 131         | 470         | 129         | 64     | 463         | 131        | <b>464</b> | <b>131</b>  | 464        | 131        |
| 510.parest_r    | 64     | 1762        | 95.0       | <b>1755</b> | <b>95.4</b> | 1753        | 95.5        | 32     | 746         | 112        | 744        | 112         | <b>745</b> | <b>112</b> |
| 511.povray_r    | 64     | <b>735</b>  | <b>203</b> | 734         | 203         | 735         | 203         | 64     | 607         | 246        | <b>608</b> | <b>246</b>  | 610        | 245        |
| 519.lbm_r       | 64     | 702         | 96.0       | <b>702</b>  | <b>96.0</b> | 703         | 96.0        | 64     | 665         | 101        | 667        | 101         | <b>666</b> | <b>101</b> |
| 521.wrf_r       | 64     | 788         | 182        | 811         | 177         | <b>801</b>  | <b>179</b>  | 32     | 395         | 182        | <b>391</b> | <b>183</b>  | 390        | 184        |
| 526.blender_r   | 64     | 521         | 187        | <b>520</b>  | <b>187</b>  | 520         | 187         | 64     | 520         | 188        | 521        | 187         | <b>520</b> | <b>187</b> |
| 527.cam4_r      | 64     | <b>650</b>  | <b>172</b> | 652         | 172         | 648         | 173         | 64     | 624         | 179        | 626        | 179         | <b>626</b> | <b>179</b> |
| 538.imagick_r   | 64     | 417         | 381        | <b>423</b>  | <b>377</b>  | 424         | 376         | 64     | 423         | 376        | <b>418</b> | <b>381</b>  | 416        | 383        |
| 544.nab_r       | 64     | 383         | 281        | <b>378</b>  | <b>285</b>  | 377         | 286         | 64     | 377         | 285        | 376        | 287         | <b>376</b> | <b>286</b> |
| 549.fotonik3d_r | 64     | 1851        | 135        | <b>1859</b> | <b>134</b>  | 1859        | 134         | 64     | <b>1846</b> | <b>135</b> | 1894       | 132         | 1845       | 135        |
| 554.roms_r      | 64     | 1316        | 77.3       | 1322        | 76.9        | <b>1319</b> | <b>77.1</b> | 32     | 530         | 96.0       | <b>528</b> | <b>96.3</b> | 527        | 96.5       |

**SPECrate®2017\_fp\_base = 168**

**SPECrate®2017\_fp\_peak = 178**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 168

Inspur NS5162M5 (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 178

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS and OS configuration:

SCALING\_GOVERNOR set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

IMC (Integrated memory controller) Interleaving set to 1-way

Sub NUMA Cluster (SNC) set to Enable

```
Sysinfo program /home/CPU2017/bin/sysinfo
```

```
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
```

```
running on linux-mqjy Mon Mar 23 21:54:42 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz
```

```
 2 "physical id"s (chips)
```

```
 64 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
```

```
cpu cores : 16
```

```
siblings : 32
```

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

```
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Inspur Corporation**

**SPECrate®2017\_fp\_base = 168**

**Inspur NS5162M5 (Intel Xeon Gold 5218)**

**SPECrate®2017\_fp\_peak = 178**

**CPU2017 License:** 3358

**Test Date:** Mar-2020

**Test Sponsor:** Inspur Corporation

**Hardware Availability:** Apr-2019

**Tested by:** Inspur Corporation

**Software Availability:** May-2019

## Platform Notes (Continued)

```

Core(s) per socket:      16
Socket(s):              2
NUMA node(s):           4
Vendor ID:               GenuineIntel
CPU family:              6
Model:                  85
Model name:              Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz
Stepping:                6
CPU MHz:                 2300.000
CPU max MHz:             3900.0000
CPU min MHz:             1000.0000
BogoMIPS:                4600.00
Virtualization:          VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 22528K
NUMA node0 CPU(s):        0-3,8-11,32-35,40-43
NUMA node1 CPU(s):        4-7,12-15,36-39,44-47
NUMA node2 CPU(s):        16-19,24-27,48-51,56-59
NUMA node3 CPU(s):        20-23,28-31,52-55,60-63
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                         pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                         lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
                         aperfmpfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                         pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                         rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
                         intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
                         tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
                         rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
                         xgetbv1 xsaves cqm_llc cqm_occur_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
                         pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni flush_l1d
                         arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43
node 0 size: 95264 MB
node 0 free: 85779 MB
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47
node 1 size: 96762 MB
node 1 free: 89613 MB
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 168

Inspur NS5162M5 (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 178

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Platform Notes (Continued)

```
node 2 size: 96733 MB
node 2 free: 89627 MB
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63
node 3 size: 96562 MB
node 3 free: 89223 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:           394570900 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux linux-mqjy 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            No status reported
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 168

Inspur NS5162M5 (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 178

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 Mar 23 12:25 last=5

SPEC is set to: /home/CPU2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sdb3  | xfs  | 407G | 49G  | 359G  | 12%  | /home      |

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 4.1.6 07/06/2019  
Vendor: Inspur  
Product: NF5280M5  
Serial: 218217939

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Hynix HMAA4GR7AJR8N-WM 32 GB 2 rank 2933, configured at 2666  
4x NO DIMM NO DIMM

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 168

Inspur NS5162M5 (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 178

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Compiler Version Notes (Continued)

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactubSSN\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 168

Inspur NS5162M5 (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 178

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 168

Inspur NS5162M5 (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 178

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate®2017\_fp\_base = 168

Inspur NS5162M5 (Intel Xeon Gold 5218)

SPECCrate®2017\_fp\_peak = 178

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 168

Inspur NS5162M5 (Intel Xeon Gold 5218)

SPECrate®2017\_fp\_peak = 178

CPU2017 License: 3358

Test Date: Mar-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-23 21:54:42-0400.

Report generated on 2020-04-14 14:11:11 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.