



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

**SPECrate®2017\_int\_base = 198**

**SPECrate®2017\_int\_peak = 206**

CPU2017 License: 19


**Test Date:** Mar-2020

**Test Sponsor:** Fujitsu

**Hardware Availability:** May-2019

**Tested by:** Fujitsu

**Software Availability:** May-2019

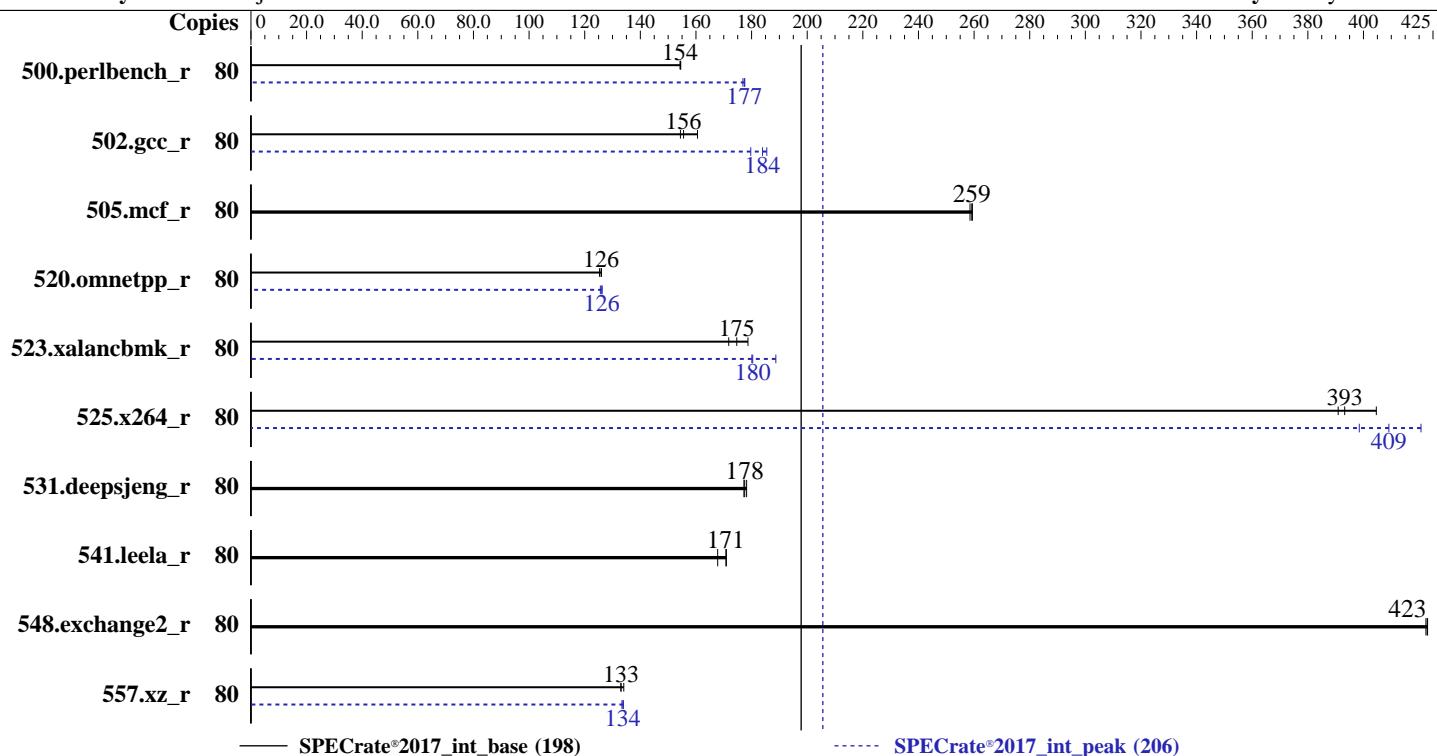

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon Gold 5218R	OS:	SUSE Linux Enterprise Server 15
Max MHz:	4000		4.12.14-25.28-default
Nominal:	2100	Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Enabled:	40 cores, 2 chips, 2 threads/core		Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Fujitsu BIOS Version V5.0.0.14 R1.18.0 for D3386-B1x released Apr-2020
L2:	1 MB I+D on chip per core	File System:	ext4
L3:	27.5 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)	Peak Pointers:	32/64-bit
Storage:	1 x SATA M.2 SSD, 480 GB	Other:	jemalloc: jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

**SPECrate®2017\_int\_base = 198**

**SPECrate®2017\_int\_peak = 206**

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	825	154	824	155	<b>825</b>	<b>154</b>	80	717	178	720	177	<b>718</b>	<b>177</b>
502.gcc_r	80	706	161	<b>728</b>	<b>156</b>	734	154	80	<b>616</b>	<b>184</b>	630	180	<b>611</b>	<b>185</b>
505.mcf_r	80	<b>499</b>	<b>259</b>	498	259	500	259	80	<b>499</b>	<b>259</b>	498	259	500	259
520.omnetpp_r	80	833	126	837	125	<b>834</b>	<b>126</b>	80	835	126	<b>832</b>	<b>126</b>	831	126
523.xalancbmk_r	80	492	172	<b>484</b>	<b>175</b>	473	179	80	469	180	448	189	<b>468</b>	<b>180</b>
525.x264_r	80	<b>356</b>	<b>393</b>	346	405	358	391	80	352	398	333	421	<b>342</b>	<b>409</b>
531.deepsjeng_r	80	517	177	<b>516</b>	<b>178</b>	514	178	80	517	177	<b>516</b>	<b>178</b>	514	178
541.leela_r	80	789	168	775	171	<b>776</b>	<b>171</b>	80	789	168	775	171	<b>776</b>	<b>171</b>
548.exchange2_r	80	495	423	496	422	<b>496</b>	<b>423</b>	80	495	423	496	422	<b>496</b>	<b>423</b>
557.xz_r	80	650	133	645	134	<b>649</b>	<b>133</b>	80	648	133	<b>646</b>	<b>134</b>	645	134

**SPECrate®2017\_int\_base = 198**

**SPECrate®2017\_int\_peak = 206**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with: nohz\_full=1-79

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/Benchmark/cpu2017-1.1.0/lib/intel64:/home/Benchmark/cpu2017-1.1.0
     /lib/ia32:/home/Benchmark/cpu2017-1.1.0/je5.0.1-32"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECrate®2017\_int\_base = 198

SPECrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

## General Notes (Continued)

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5  
jemalloc: sources available via jemalloc.net  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled  
DCU Ip Prefetcher = Disabled  
Stale AtoS = Enabled  
Patrol Scrub = Disabled  
WR CRC feature Control = Disabled  
Fan Control = Full

Sysinfo program /home/Benchmark/cpu2017-1.1.0/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on sles15 Thu Mar 12 19:57:57 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
  2 "physical id"s (chips)
  80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 20
  siblings   : 40
  physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	80

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECrate®2017\_int\_base = 198

SPECrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

## Platform Notes (Continued)

On-line CPU(s) list: 0-79  
Thread(s) per core: 2  
Core(s) per socket: 20  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz  
Stepping: 7  
CPU MHz: 2100.000  
CPU max MHz: 4000.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 28160K  
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56  
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59  
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76  
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperf fm perf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsavveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 28160 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56  
node 0 size: 95249 MB  
node 0 free: 91667 MB  
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59  
node 1 size: 96764 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECrate®2017\_int\_base = 198

SPECrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

## Platform Notes (Continued)

```
node 1 free: 96476 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 96764 MB
node 2 free: 96503 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 96762 MB
node 3 free: 96493 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:           394793548 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

uname -a:
Linux sles15 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            No status reported
CVE-2017-5754 (Meltdown):                   Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):          Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Enhanced IBRS, IBPB: conditional,
                                                RSB filling

run-level 3 Mar 12 19:57
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECrate®2017\_int\_base = 198

SPECrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

## Platform Notes (Continued)

SPEC is set to: /home/Benchmark/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	188G	33G	146G	19%	/

From /sys/devices/virtual/dmi/id

BIOS: FUJITSU // American Megatrends Inc. V5.0.0.14 R1.18.0 for D3386-B1x  
02/10/2020

Vendor: FUJITSU

Product: PRIMERGY RX2520 M5

Product Family: SERVER

Serial: YMNRXXXX17

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

=====

C | 502.gcc\_r(peak)

=====

-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECCrate®2017\_int\_base = 198

SPECCrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

## Compiler Version Notes (Continued)

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
C++     | 523.xalancbmk_r(peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
      | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
C++     | 523.xalancbmk_r(peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
      | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECrate®2017\_int\_base = 198

SPECrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2020

Hardware Availability: May-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECrate®2017\_int\_base = 198

SPECrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2020

Hardware Availability: May-2019

Software Availability: May-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECrate®2017\_int\_base = 198

SPECrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2020

Hardware Availability: May-2019

Software Availability: May-2019

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2520 M5, Intel Xeon Gold 5218R,  
2.10 GHz

SPECrate®2017\_int\_base = 198

SPECrate®2017\_int\_peak = 206

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-12 06:57:56-0400.

Report generated on 2020-04-14 14:18:08 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.