SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.40 GHz, Intel Xeon Gold 6246R)

SPECrate®2017_fp_base = 247

SPECrate®2017_fp_peak = 260

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Sep-2019

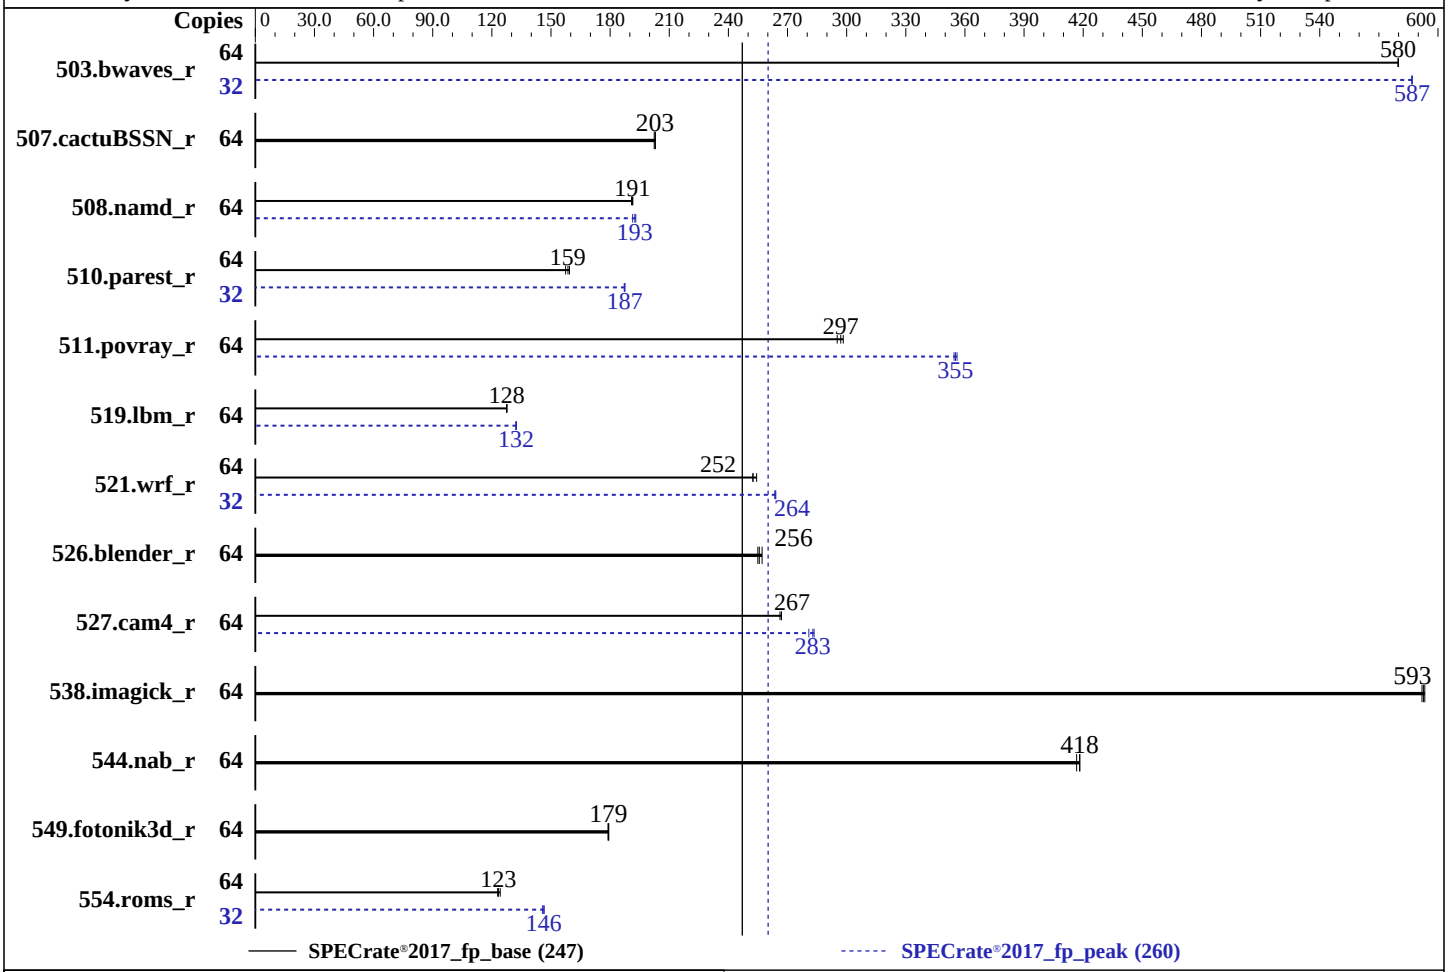

Hardware

CPU Name:	Intel Xeon Gold 6246R
Max MHz:	4100
Nominal:	3400
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 1 TB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP1 Kernel 4.12.14-195-default
Compiler:	C/C++: Version 19.0.5.281 of Intel C/C++ Compiler Build 20190815 for Linux; Fortran: Version 19.0.5.281 of Intel Fortran Compiler Build 20190815 for Linux
Parallel:	No
Firmware:	Version 6102 released Dec-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.40 GHz, Intel Xeon Gold 6246R)

SPECrate®2017_fp_base = 247

SPECrate®2017_fp_peak = 260

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Sep-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1107	580	**1107**	**580**	1107	580	32	**547**	**587**	547	587	547	587
507.cactuBSSN_r	64	400	202	**399**	**203**	399	203	64	400	202	**399**	**203**	399	203
508.namd_r	64	318	191	319	191	**318**	**191**	64	315	193	318	191	**316**	**193**
510.parest_r	64	1064	157	1050	159	**1056**	**159**	32	**447**	**187**	446	188	447	187
511.povray_r	64	**503**	**297**	501	298	506	295	64	**421**	**355**	420	356	422	354
519.lbm_r	64	**529**	**128**	528	128	529	127	64	510	132	509	132	**510**	**132**
521.wrf_r	64	564	254	568	252	**568**	**252**	32	272	264	271	264	**272**	**264**
526.blender_r	64	**381**	**256**	379	257	382	255	64	**381**	**256**	379	257	382	255
527.cam4_r	64	419	267	421	266	**419**	**267**	64	**396**	**283**	395	283	399	281
538.imagick_r	64	268	593	269	592	**269**	**593**	64	268	593	269	592	**269**	**593**
544.nab_r	64	**258**	**418**	259	417	258	418	64	**258**	**418**	259	417	258	418
549.fotonik3d_r	64	**1392**	**179**	1391	179	1394	179	64	**1392**	**179**	1391	179	1394	179
554.roms_r	64	827	123	819	124	**825**	**123**	32	**347**	**146**	347	147	349	146

SPECrate®2017_fp_base = 247

SPECrate®2017_fp_peak = 260

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
 Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017_19u5/lib/intel64"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM
 memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration:
VT-d = Disabled
Patrol Scrub = Disabled
ENERGY_PERF_BIAS_CFG mode = performance
SNC = Enabled
IMC interleaving = 1-way
Engine Boost = Level3(Max)
Enforce POR = Disable
Memory Frequency = 2933
LLC dead line allc = Disabled
SR-IOV Support = Disabled
CSM Support = Disabled

 Sysinfo program /spec2017_19u5/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-628j Sat Apr 11 19:58:16 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6246R CPU @ 3.40GHz
       2  "physical id"s (chips)
       64 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 5 6 9 11 12 16 18 20 21 26 28 29
       physical 1: cores 0 1 2 3 4 5 6 12 13 16 17 18 19 21 24 28
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     Address sizes:       46 bits physical, 48 bits virtual
     CPU(s):              64
     On-line CPU(s) list: 0-63
     Thread(s) per core:  2
     Core(s) per socket:  16
     Socket(s):           2
     NUMA node(s):        4
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               85
     Model name:          Intel(R) Xeon(R) Gold 6246R CPU @ 3.40GHz
     Stepping:            7
     CPU MHz:             3400.000
     CPU max MHz:         4100.0000
     CPU min MHz:         1200.0000
     BogoMIPS:            6800.00
     Virtualization:      VT-x
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            1024K
     L3 cache:            36608K
     NUMA node0 CPU(s):   0-3,6,9,10,13,32-35,38,41,42,45
     NUMA node1 CPU(s):   4,5,7,8,11,12,14,15,36,37,39,40,43,44,46,47
     NUMA node2 CPU(s):   16-19,25-27,30,48-51,57-59,62
     NUMA node3 CPU(s):   20-24,28,29,31,52-56,60,61,63
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
     avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
     invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
     flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
     cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
     avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
     cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
     ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
   cache size : 36608 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

(Continued on next page)

Platform Notes (Continued)

```
  available: 4 nodes (0-3)
  node 0 cpus: 0 1 2 3 6 9 10 13 32 33 34 35 38 41 42 45
  node 0 size: 192079 MB
  node 0 free: 191559 MB
  node 1 cpus: 4 5 7 8 11 12 14 15 36 37 39 40 43 44 46 47
  node 1 size: 193532 MB
  node 1 free: 193064 MB
  node 2 cpus: 16 17 18 19 25 26 27 30 48 49 50 51 57 58 59 62
  node 2 size: 193503 MB
  node 2 free: 193006 MB
  node 3 cpus: 20 21 22 23 24 28 29 31 52 53 54 55 56 60 61 63
  node 3 size: 193531 MB
  node 3 free: 192826 MB
  node distances:
  node   0   1   2   3
    0:  10  11  21  21
    1:  11  10  21  21
    2:  21  21  10  11
    3:  21  21  11  10

From /proc/meminfo
   MemTotal:       791190928 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP1"
      VERSION_ID="15.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:
   Linux linux-628j 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:         Not affected
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
                                            RSB filling

 run-level 3 Apr 10 19:58

 SPEC is set to: /spec2017_19u5
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   932G   19G  914G   2% /

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends Inc. 6102 12/19/2019
     Vendor:  ASUSTeK COMPUTER INC.
     Product: Z11PG-D24 Series
     Product Family: Server
     Serial:  System Serial Number

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:
-m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:
-m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs

Benchmarks using both C and C++:
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -m64 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

510.parest_r: -m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves_r: -m64 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs

549.fotonik3d_r: basepeak = yes

554.roms_r: -m64 -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:
-m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs

Benchmarks using both C and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

511.povray_r: `-m64 -std=c11 -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.html`
`http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.xml`
`http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-11 07:58:16-0400.
Report generated on 2021-01-04 17:38:05 by CPU2017 PS formatter v6255.
Originally published on 2020-04-28.