SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base =	8.98
SPECspeed®2017_int_energy_base =	44.8
SPECspeed®2017_int_peak =	9.20
SPECspeed®2017_int_energy_peak =	45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

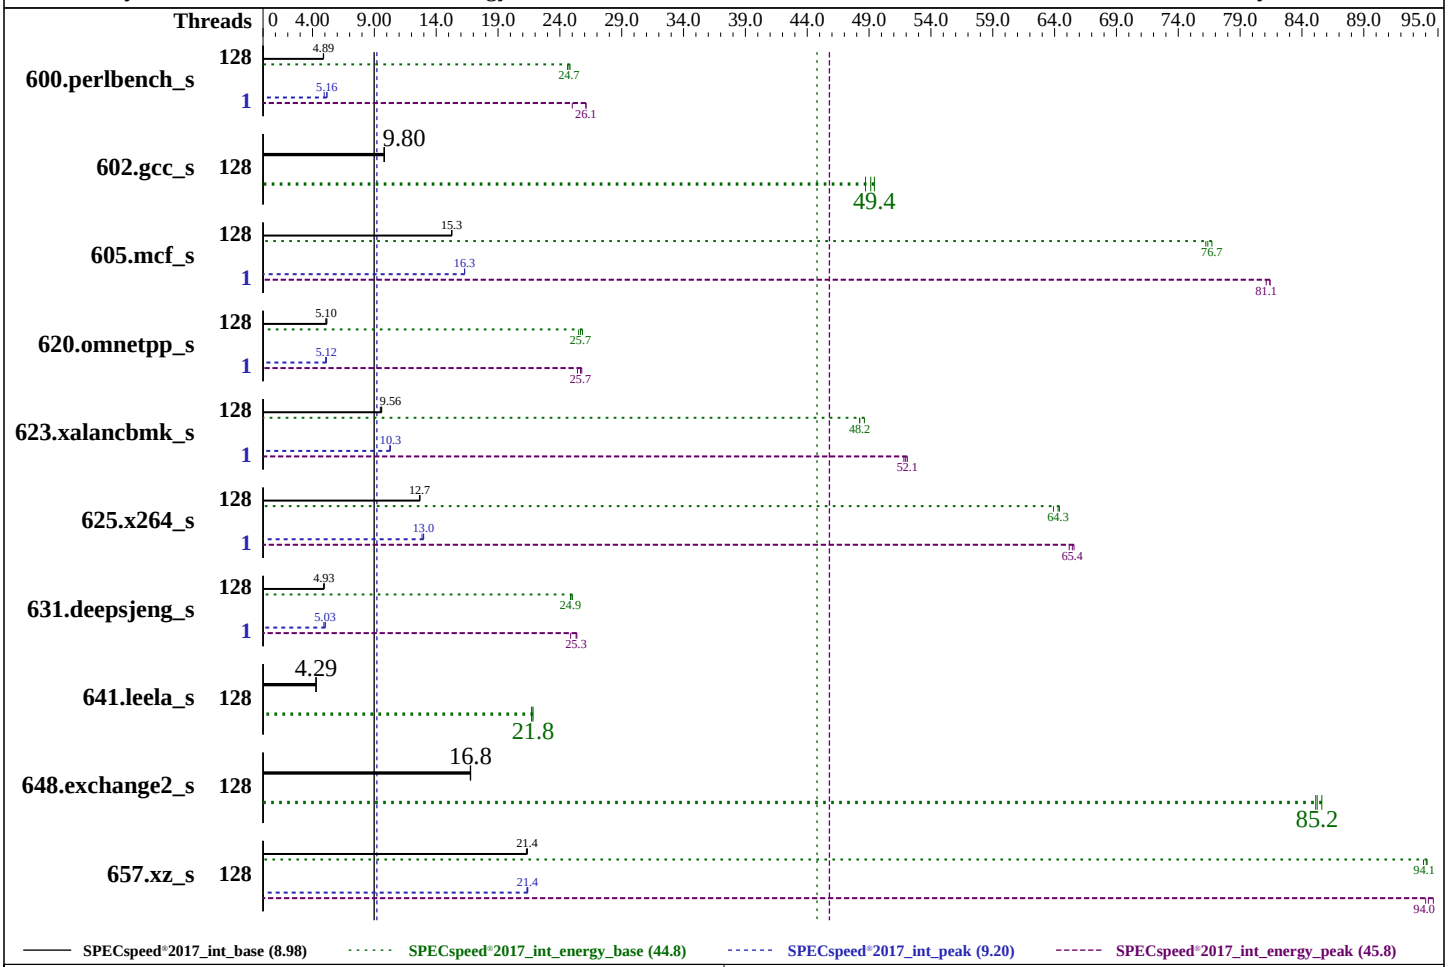

Hardware

CPU Name:	AMD EPYC 7742
Max MHz:	3400
Nominal:	2250
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 4 cores
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.1 (Ootpa) Kernel 4.18.0-147.el8.x86_64
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	Yes
Firmware:	Lenovo BIOS Version D8E105F 1.00 released Mar-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base =	8.98
SPECspeed®2017_int_energy_base =	44.8
SPECspeed®2017_int_peak =	9.20
SPECspeed®2017_int_energy_peak =	45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Power

Max. Power (W): 633.67
Idle Power (W): 121.38
Min. Temperature (C): 20.88
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 1 wire
Provisioning: Line-powered

Power Settings

Management FW: Version 2.00 of D8BT05U
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 1100 W (non-redundant)
Details: ThinkSystem 1100W Platinum Power Supply SP57A14700
Backplane: 8 x 2.5-inch HDD back plane
Other Storage: RAID 930-8i 2GB Flash PCIe 12Gb Adapter
Storage Model #s: 6FC81AB0
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #s: 8 x High Performance fans

Power Analyzer

Power Analyzer: WIN:8888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UG05013E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: China CEPREI Laboratory
Calibration Label: 1GA19013841-0005
Calibration Date: 27-Sep-2019
PTDaemon™ Version: 1.9.1 (a2d19f26; 2019-07-17)
Setup Description: Connected to PSU1
Current Ranges Used: 2.5A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:8889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: COM1
Input Connection: USB
PTDaemon Version: 1.9.1 (a2d19f26; 2019-07-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	128	363	4.89	77.6	24.8	214	216	**363**	**4.89**	**77.8**	**24.7**	**214**	**217**	364	4.87	78.2	24.6	215	221
602.gcc_s	128	**406**	**9.80**	**87.6**	**49.4**	**216**	**224**	405	9.82	88.1	49.1	217	228	407	9.78	88.9	48.7	218	229
605.mcf_s	128	**310**	**15.3**	**67.1**	**76.7**	**217**	**222**	309	15.3	67.6	76.2	219	231	310	15.2	67.4	76.4	218	222
620.omnetpp_s	128	321	5.08	69.5	25.5	217	218	**320**	**5.10**	**69.1**	**25.7**	**216**	**217**	316	5.16	68.7	25.8	218	218
623.xalancbmk_s	128	149	9.48	31.9	48.2	213	214	148	9.60	31.6	48.6	214	215	**148**	**9.56**	**31.9**	**48.2**	**215**	**216**
625.x264_s	128	139	12.7	29.8	64.4	214	215	**139**	**12.7**	**29.9**	**64.3**	**214**	**215**	139	12.7	30.0	63.9	215	216
631.deepsjeng_s	128	292	4.91	62.6	24.9	214	225	290	4.94	62.3	25.0	214	232	**291**	**4.93**	**62.7**	**24.9**	**216**	**225**
641.leela_s	128	398	4.29	85.1	21.7	214	215	**398**	**4.29**	**84.6**	**21.8**	**213**	**213**	398	4.29	85.0	21.7	214	215
648.exchange2_s	128	175	16.8	37.6	85.1	214	215	175	16.8	37.4	85.6	213	214	**175**	**16.8**	**37.5**	**85.2**	**214**	**215**
657.xz_s	128	**289**	**21.4**	**71.6**	**94.1**	**247**	**631**	290	21.3	71.8	93.8	247	631	289	21.4	71.5	94.1	247	632

SPECspeed®2017_int_base = 8.98

SPECspeed®2017_int_energy_base = 44.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98

SPECspeed®2017_int_energy_base = 44.8

SPECspeed®2017_int_peak = 9.20

SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	1	359	4.95	77.0	25.0	215	218	344	5.16	73.7	26.1	215	218	**344**	**5.16**	**73.8**	**26.1**	**215**	**218**
602.gcc_s	128	**406**	**9.80**	**87.6**	**49.4**	**216**	**224**	405	9.82	88.1	49.1	217	228	407	9.78	88.9	48.7	218	229
605.mcf_s	1	290	16.3	63.3	81.4	218	230	290	16.3	63.3	81.4	218	231	**290**	**16.3**	**63.5**	**81.1**	**219**	**231**
620.omnetpp_s	1	322	5.06	69.8	25.4	217	218	318	5.12	68.9	25.8	216	218	**319**	**5.12**	**69.1**	**25.7**	**217**	**218**
623.xalancbmk_s	1	138	10.3	29.6	52.0	215	216	**138**	**10.3**	**29.5**	**52.1**	**214**	**215**	138	10.3	29.7	51.8	215	216
625.x264_s	1	**136**	**13.0**	**29.3**	**65.4**	**216**	**217**	137	12.9	29.4	65.2	215	216	136	13.0	29.3	65.6	215	217
631.deepsjeng_s	1	**285**	**5.03**	**61.5**	**25.3**	**216**	**233**	292	4.91	62.6	24.9	215	230	285	5.03	61.4	25.4	215	232
641.leela_s	128	398	4.29	85.1	21.7	214	215	**398**	**4.29**	**84.6**	**21.8**	**213**	**213**	398	4.29	85.0	21.7	214	215
648.exchange2_s	128	175	16.8	37.6	85.1	214	215	175	16.8	37.4	85.6	213	214	**175**	**16.8**	**37.5**	**85.2**	**214**	**215**
657.xz_s	128	**289**	**21.4**	**71.6**	**94.0**	**248**	**634**	290	21.3	71.5	94.2	247	631	289	21.4	71.1	94.6	246	628

SPECspeed®2017_int_peak = **9.20**

SPECspeed®2017_int_energy_peak = **45.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
      "/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd_speed_aocc200_rome_C_lib/64
      ;/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd_speed_aocc200_rome_C_lib/32
      :"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"
OMP_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-127"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
 Choose Operating Mode set to Custom Mode
 Determinism Slider set to Power
 cTDP set to Manual
 cTDP Manual set to 240
 Memory Speed set to 3200MHz
 Efficiency Mode set to Auto
 NUMA nodes per socket set to NPS4
 Zero Output set to Advanced Mode

 Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C1/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on localhost.localdomain Tue Apr  7 05:53:29 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7742 64-Core Processor
       2  "physical id"s (chips)
       256 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 64
       siblings  : 128
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63
```

(Continued on next page)

Platform Notes (Continued)

```
 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              256
      On-line CPU(s) list: 0-255
      Thread(s) per core:  2
      Core(s) per socket:  64
      Socket(s):           2
      NUMA node(s):        8
      Vendor ID:           AuthenticAMD
      CPU family:          23
      Model:               49
      Model name:          AMD EPYC 7742 64-Core Processor
      Stepping:            0
      CPU MHz:             3136.401
      CPU max MHz:         2250.0000
      CPU min MHz:         1500.0000
      BogoMIPS:            4491.86
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            16384K
      NUMA node0 CPU(s):   0-15,128-143
      NUMA node1 CPU(s):   16-31,144-159
      NUMA node2 CPU(s):   32-47,160-175
      NUMA node3 CPU(s):   48-63,176-191
      NUMA node4 CPU(s):   64-79,192-207
      NUMA node5 CPU(s):   80-95,208-223
      NUMA node6 CPU(s):   96-111,224-239
      NUMA node7 CPU(s):   112-127,240-255
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
     pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
     f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
     3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
     perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp
     vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb
     sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
     cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save
     tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
     v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

(Continued on next page)

Platform Notes (Continued)

```
 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 128 129 130 131 132 133 134 135 136
   137 138 139 140 141 142 143
   node 0 size: 64282 MB
   node 0 free: 64106 MB
   node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 144 145 146 147 148 149
   150 151 152 153 154 155 156 157 158 159
   node 1 size: 64503 MB
   node 1 free: 64210 MB
   node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 160 161 162 163 164 165
   166 167 168 169 170 171 172 173 174 175
   node 2 size: 64503 MB
   node 2 free: 64312 MB
   node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 176 177 178 179 180 181
   182 183 184 185 186 187 188 189 190 191
   node 3 size: 64491 MB
   node 3 free: 64059 MB
   node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 192 193 194 195 196 197
   198 199 200 201 202 203 204 205 206 207
   node 4 size: 64503 MB
   node 4 free: 64354 MB
   node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 208 209 210 211 212 213
   214 215 216 217 218 219 220 221 222 223
   node 5 size: 64503 MB
   node 5 free: 64362 MB
   node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 224 225 226
   227 228 229 230 231 232 233 234 235 236 237 238 239
   node 6 size: 64503 MB
   node 6 free: 64353 MB
   node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 240 241
   242 243 244 245 246 247 248 249 250 251 252 253 254 255
   node 7 size: 64502 MB
   node 7 free: 64310 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  32  32  32  32
     1:  12  10  12  12  32  32  32  32
     2:  12  12  10  12  32  32  32  32
     3:  12  12  12  10  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

 From /proc/meminfo
    MemTotal:       528174676 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.1 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.1"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

 uname -a:
    Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-3620 (L1 Terminal Fault):        Not affected
 Microarchitectural Data Sampling:         Not affected
 CVE-2017-5754 (Meltdown):                 Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                           via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):        Mitigation: usercopy/swapgs barriers and __user
                                           pointer sanitization
 CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline, IBPB:
                                           conditional, IBRS_FW, STIBP: conditional, RSB
                                           filling

 run-level 3 Apr 7 05:51

 SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C1
    Filesystem     Type  Size  Used Avail Use% Mounted on
```

(Continued on next page)

Platform Notes (Continued)

```
    /dev/sda2      xfs   838G   53G  785G   7% /home

 From /sys/devices/virtual/dmi/id
     BIOS:    Lenovo D8E105F-1.00 03/19/2020
     Vendor:  Lenovo
     Product: ThinkSystem SR645 MB
     Product Family: ThinkSystem
     Serial:  1234567890

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M393A4K40DB3-CWE 32 kB 2 rank 3200
     16x Unknown Unknown

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

C++ benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Base Other Flags

C benchmarks:
-Wno-return-type

C++ benchmarks:
-Wno-return-type

Fortran benchmarks:
-Wno-return-type

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
flang

Peak Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

(Continued on next page)

Peak Optimization Flags (Continued)

602.gcc_s: `basepeak = yes`

605.mcf_s: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively -mllvm -function-specialize -mllvm -enable-gvn-hoist -mllvm -unroll-threshold=50 -fremap-arrays -mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp -mllvm -inline-threshold=1000 -flv-function-specialization -DSPEC_OPENMP -fopenmp -DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl -ljemalloc -lflang`

625.x264_s: `Same as 600.perlbench_s`

657.xz_s: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively -mllvm -function-specialize -mllvm -enable-gvn-hoist -mllvm -unroll-threshold=50 -fremap-arrays -mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp -mllvm -inline-threshold=1000 -flv-function-specialization -DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang`

C++ benchmarks:

620.omnetpp_s: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000`

(Continued on next page)

Peak Optimization Flags (Continued)

620.omnetpp_s (continued):
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang

623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-return-type

C++ benchmarks (except as noted below):
-Wno-return-type

623.xalancbmk_s: -Wno-return-type
-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32

Fortran benchmarks:
-Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-J.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-J.xml

PTDaemon, SPEC CPU, and SPECspeed are trademarks or registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-06 17:53:29-0400.
Report generated on 2020-05-05 11:00:36 by CPU2017 PS formatter v6255.
Originally published on 2020-05-05.