



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4  
(X11DPU , Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 225

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

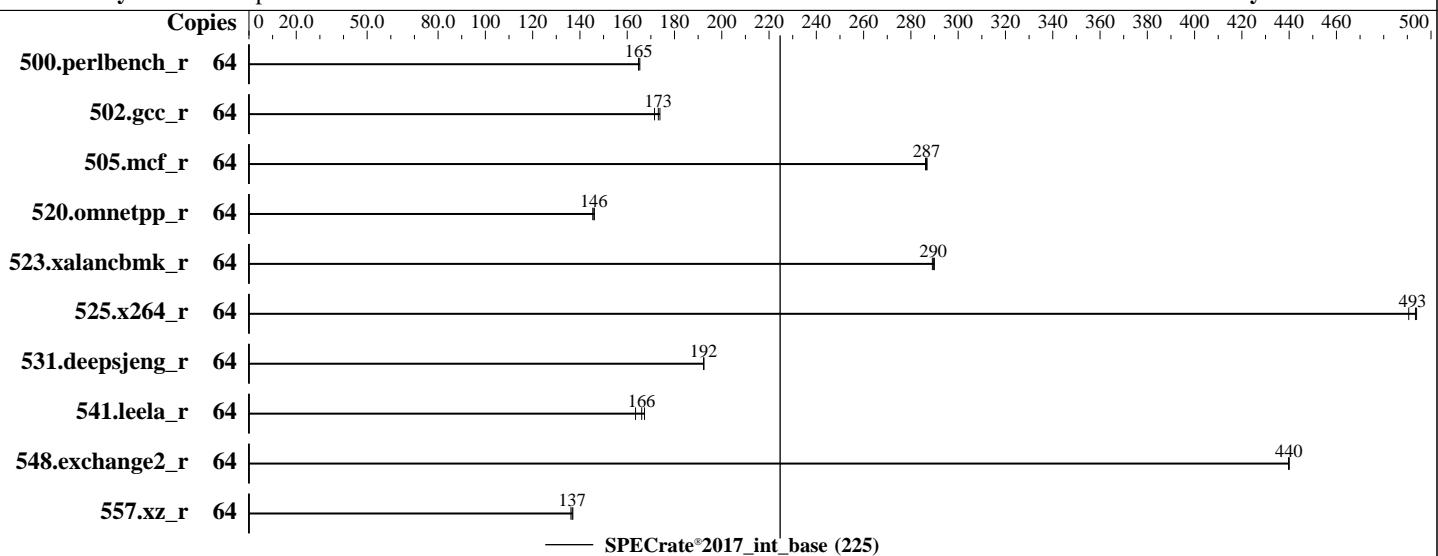

### Hardware

CPU Name: Intel Xeon Gold 6226R  
Max MHz: 3900  
Nominal: 2900  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.1  
Compiler: Kernel 4.18.0-147.el8.x86\_64  
C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version 3.3 released Feb-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4  
(X11DPU , Intel Xeon Gold 6226R)

**SPECrate®2017\_int\_base = 225**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	616	165	618	165	<b>618</b>	<b>165</b>							
502.gcc_r	64	<b>523</b>	<b>173</b>	521	174	528	172							
505.mcf_r	64	<b>361</b>	<b>287</b>	361	286	361	287							
520.omnetpp_r	64	575	146	577	145	<b>576</b>	<b>146</b>							
523.xalancbmk_r	64	<b>233</b>	<b>290</b>	234	289	233	290							
525.x264_r	64	<b>227</b>	<b>493</b>	228	491	227	494							
531.deepsjeng_r	64	381	192	381	192	<b>381</b>	<b>192</b>							
541.leela_r	64	<b>638</b>	<b>166</b>	648	164	633	167							
548.exchange2_r	64	381	440	381	440	<b>381</b>	<b>440</b>							
557.xz_r	64	505	137	508	136	<b>506</b>	<b>137</b>							

**SPECrate®2017\_int\_base = 225**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
  32"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4  
(X11DPU , Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 225

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

## General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode = Extreme Performance

Stale AtoS = Disable

Patrol Scrub = Disable

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on RHEL81-01 Tue Apr 7 12:51:30 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

Core(s) per socket: 16

Socket(s): 2

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4  
(X11DPU , Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 225

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

## Platform Notes (Continued)

NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz  
Stepping: 7  
CPU MHz: 3600.140  
CPU max MHz: 3900.0000  
CPU min MHz: 1200.0000  
BogoMIPS: 5800.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 22528K  
NUMA node0 CPU(s): 0-3,8-11,32-35,40-43  
NUMA node1 CPU(s): 4-7,12-15,36-39,44-47  
NUMA node2 CPU(s): 16-19,24-27,48-51,56-59  
NUMA node3 CPU(s): 20-23,28-31,52-55,60-63  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xttopology nonstop\_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pku ospke avx512\_vnni md\_clear flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 22528 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43  
node 0 size: 95324 MB  
node 0 free: 95077 MB  
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47  
node 1 size: 96764 MB  
node 1 free: 96511 MB  
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59  
node 2 size: 96764 MB  
node 2 free: 95831 MB  
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4  
(X11DPU , Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 225

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

## Platform Notes (Continued)

```
node 3 size: 96764 MB
node 3 free: 96585 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10

From /proc/meminfo
MemTotal:           394872872 kB
HugePages_Total:      0
Hugepagesize:        2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:
Linux RHEL81-01 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: usercopy/swaps barriers and __user
                                                pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS, IBPB: conditional,
                                                RSB filling

run-level 3 Apr 7 11:29

SPEC is set to: /home/cpu2017
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4  
(X11DPU , Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 225

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	185G	8.2G	177G	5%	/

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 3.3 02/21/2020  
Vendor: Supermicro  
Product: Super Server  
Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Micron Technology 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933  
12x NO DIMM NO DIMM

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
-----
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
  NextGen Technology Build 20190729
  Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      | 541.leela_r(base)
-----
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
  NextGen Technology Build 20190729
  Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
Fortran | 548.exchange2_r(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
  Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4  
(X11DPU , Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 225

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -festo  
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -festo -mfpmath=sse  
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4  
(X11DPU , Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 225

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Apr-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Nov-2019

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revF.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revF.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-07 00:51:30-0400.

Report generated on 2020-04-28 15:31:47 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-28.