SPEC CPU®2017 Integer Rate Result

NEC Corporation

SPECrate®2017_int_base = 239

Express5800/R120h-1M (Intel Xeon Gold 6248)

SPECrate®2017_int_peak = 249

CPU2017 License:	9006	**Test Date:**	Jun-2020
Test Sponsor:	NEC Corporation	**Hardware Availability:**	Dec-2019
Tested by:	NEC Corporation	**Software Availability:**	Sep-2019

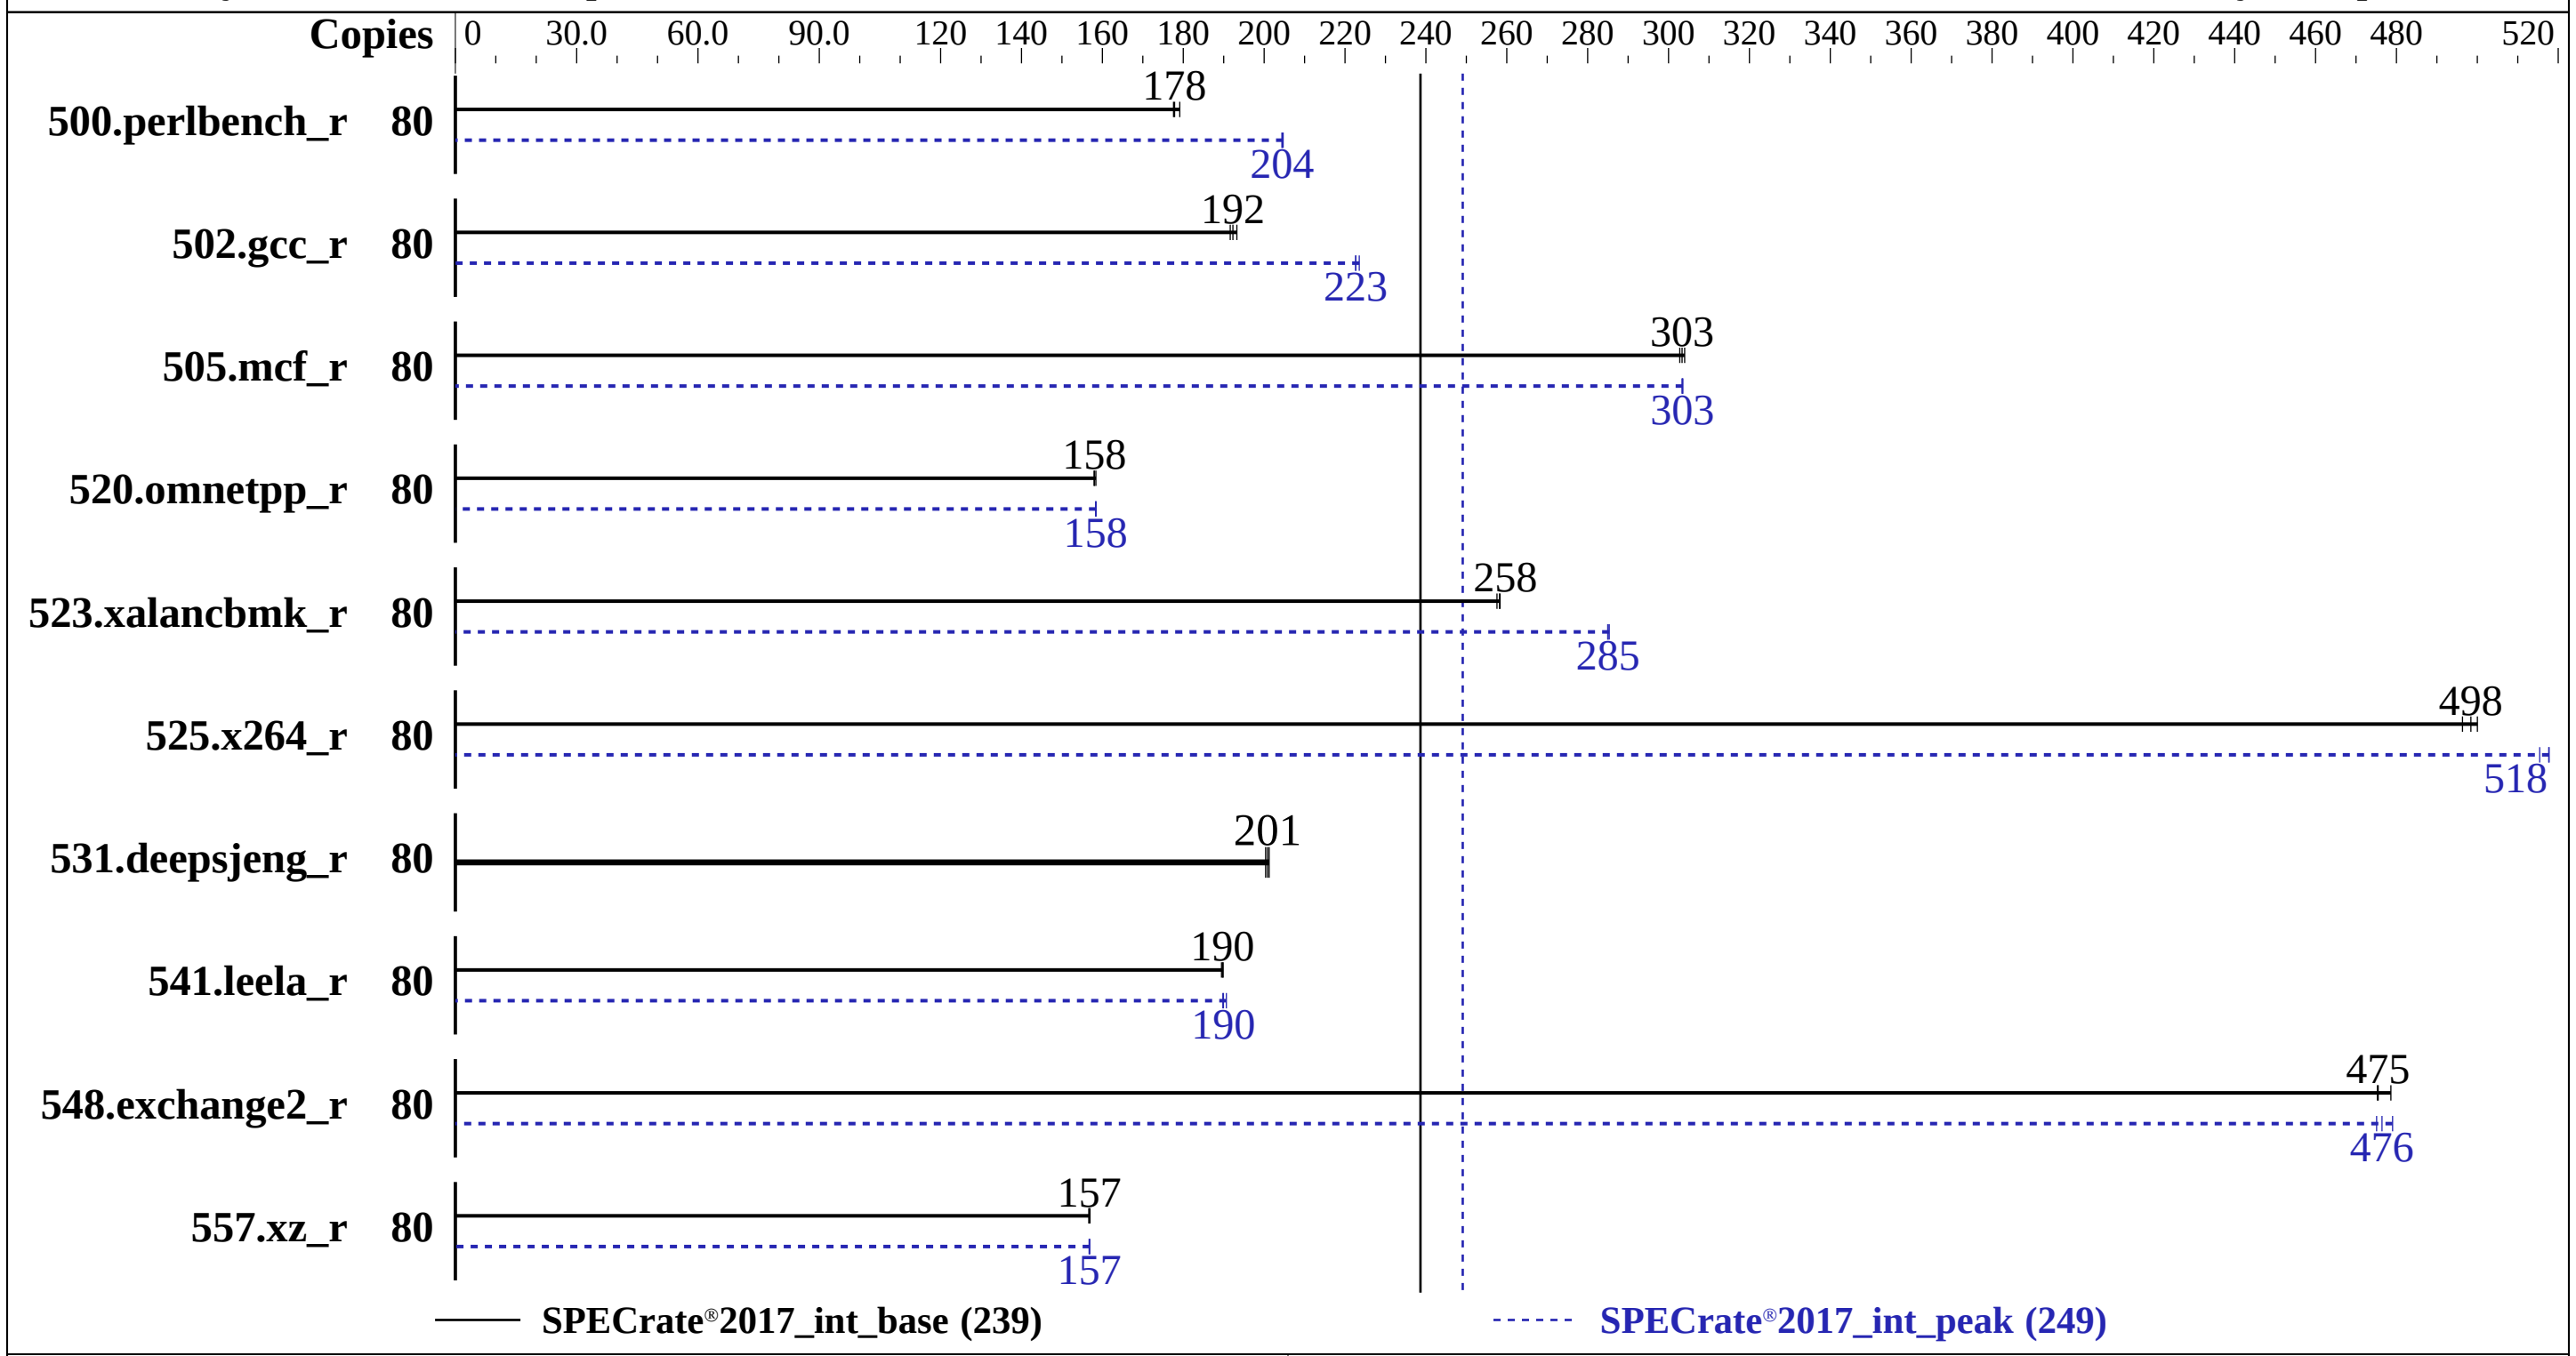

Hardware

CPU Name:	Intel Xeon Gold 6248
Max MHz:	3900
Nominal:	2500
Enabled:	40 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)
Storage:	1 x 1 TB SATA, 7200 RPM, RAID 0
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.7 (Maipo) Kernel 3.10.0-1062.1.1.el7.x86_64
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	NEC BIOS Version U32 v2.22 11/13/2019 released Mar-2020
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6248)

SPECrate®2017_int_base = 239

SPECrate®2017_int_peak = 249

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation
Test Date: Jun-2020
Hardware Availability: Dec-2019
Software Availability: Sep-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	717	178	**716**	**178**	711	179	80	622	205	623	204	**623**	**204**
502.gcc_r	80	591	192	586	193	**589**	**192**	80	507	224	509	223	**509**	**223**
505.mcf_r	80	**426**	**303**	427	303	425	304	80	426	303	426	304	**426**	**303**
520.omnetpp_r	80	**664**	**158**	663	158	665	158	80	**663**	**158**	663	158	662	158
523.xalancbmk_r	80	**327**	**258**	327	258	328	258	80	296	285	296	285	**296**	**285**
525.x264_r	80	**281**	**498**	282	496	280	500	80	271	518	272	515	**271**	**518**
531.deepsjeng_r	80	456	201	**457**	**201**	458	200	80	456	201	**457**	**201**	458	200
541.leela_r	80	699	189	698	190	**698**	**190**	80	**698**	**190**	695	191	698	190
548.exchange2_r	80	441	475	**441**	**475**	438	479	80	**440**	**476**	438	479	441	475
557.xz_r	80	552	157	**551**	**157**	551	157	80	**551**	**157**	551	157	551	157

SPECrate®2017_int_base = **239**

SPECrate®2017_int_peak = **249**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
     32"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 >       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)

General Notes (Continued)

```
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
 Thermal Configuration: Maximum Cooling
 Workload Profile: General Throughput Compute
 Memory Patrol Scrubbing: Disabled
 LLC Dead Line Allocation: Disabled
 LLC Prefetch: Enabled
 Enhanced Processor Performance: Enabled
 Workload Profile: Custom
  Advanced Memory Protection: Advanced ECC Support

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on r120h1m Tue Jun  2 09:57:49 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
      2  "physical id"s (chips)
      80 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 20
      siblings  : 40
      physical 0: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
      physical 1: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:
     Architecture:          x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                80
     On-line CPU(s) list:   0-79
     Thread(s) per core:    2
     Core(s) per socket:    20
     Socket(s):             2
     NUMA node(s):          4
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
     Stepping:              6
     CPU MHz:               2500.000
     BogoMIPS:              5000.00
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              28160K
     NUMA node0 CPU(s):     0-9,40-49
     NUMA node1 CPU(s):     10-19,50-59
     NUMA node2 CPU(s):     20-29,60-69
     NUMA node3 CPU(s):     30-39,70-79
     Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
     aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
     fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
     xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
     intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
     flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
     cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
     avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
     dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp
     flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 28160 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 40 41 42 43 44 45 46 47 48 49
   node 0 size: 97960 MB
   node 0 free: 95476 MB
   node 1 cpus: 10 11 12 13 14 15 16 17 18 19 50 51 52 53 54 55 56 57 58 59
```

(Continued on next page)

Platform Notes (Continued)

```
    node 1 size: 98304 MB
    node 1 free: 95916 MB
    node 2 cpus: 20 21 22 23 24 25 26 27 28 29 60 61 62 63 64 65 66 67 68 69
    node 2 size: 98304 MB
    node 2 free: 96055 MB
    node 3 cpus: 30 31 32 33 34 35 36 37 38 39 70 71 72 73 74 75 76 77 78 79
    node 3 size: 98303 MB
    node 3 free: 96052 MB
    node distances:
    node   0   1   2   3
      0:  10  21  31  31
      1:  21  10  31  31
      2:  31  31  10  21
      3:  31  31  21  10

  From /proc/meminfo
     MemTotal:       395916300 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.7 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VARIANT="Server"
        VARIANT_ID="server"
        VERSION_ID="7.7"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
     redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server

  uname -a:
     Linux r120h1m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):        Not affected
  Microarchitectural Data Sampling:         Not affected
  CVE-2017-5754 (Meltdown):                 Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                            via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):        Mitigation: Load fences, usercopy/swapgs
                                            barriers and __user pointer sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
CVE-2017-5715 (Spectre variant 2):        Mitigation: Full retpoline, IBPB

run-level 3 Jun 2 09:52

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      ext4  908G  131G  732G  16% /

From /sys/devices/virtual/dmi/id
    BIOS:    NEC U32 11/13/2019
    Vendor:  NEC
    Product: Express5800/R120h-1M
    Serial:  JPN0084094

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    24x HPE P03050-091 16 GB 2 rank 2933

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64 -std=c11

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):
icpc -m64

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-01 20:57:48-0400.
Report generated on 2020-06-23 18:03:42 by CPU2017 PS formatter v6255.
Originally published on 2020-06-23.