



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

**SPECrate®2017\_int\_base = 123**

**SPECrate®2017\_int\_peak = 128**

CPU2017 License: 9016


**Test Date:** May-2020

Test Sponsor: ASUSTeK Computer Inc.

**Hardware Availability:** Feb-2020

Tested by: ASUSTeK Computer Inc.

**Software Availability:** Sep-2019

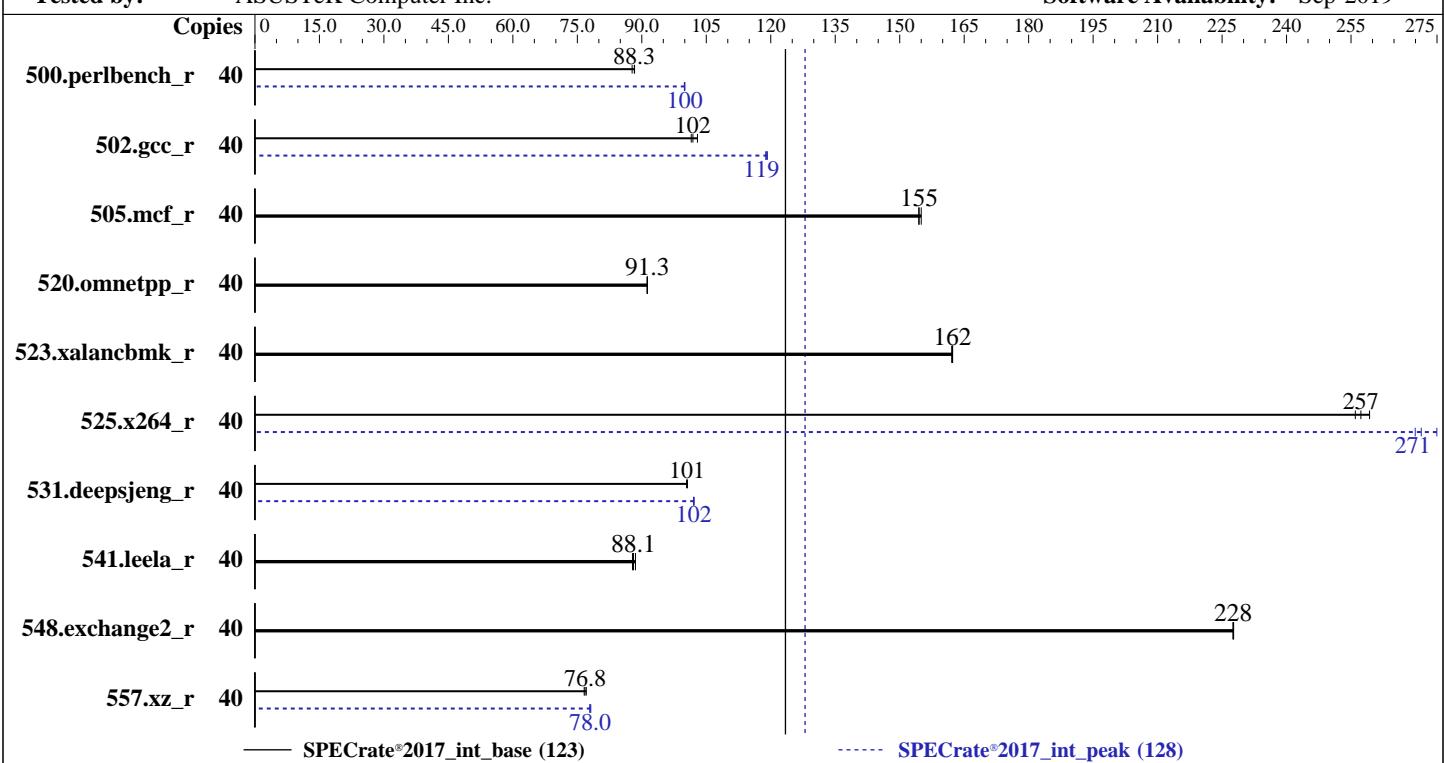

### Hardware

CPU Name: Intel Xeon Silver 4210R  
Max MHz: 3200  
Nominal: 2400  
Enabled: 20 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 13.75 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R,  
running at 2400)  
Storage: 1 x 1 TB SATA SSD  
Other: None

### OS:

SUSE Linux Enterprise Server 15 SP1

Kernel 4.12.14-195-default

C/C++: Version 19.0.5.281 of Intel C/C++

Compiler Build 20190815 for Linux;

Fortran: Version 19.0.5.281 of Intel Fortran

Compiler Build 20190815 for Linux

### Compiler:

No

Version 6102 released Dec-2019

### Firmware:

xfs

### File System:

Run level 3 (multi-user)

### System State:

64-bit

### Base Pointers:

32/64-bit

### Peak Pointers:

jemalloc: jemalloc memory allocator library

### Other:

V5.0.1

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage

### Software



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

**SPECrate®2017\_int\_base = 123**

**SPECrate®2017\_int\_peak = 128**

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	721	88.3	<b>722</b>	<b>88.3</b>	726	87.8	40	637	99.9	<b>637</b>	<b>100</b>	637	100
502.gcc_r	40	550	103	<b>556</b>	<b>102</b>	558	101	40	<b>476</b>	<b>119</b>	477	119	475	119
505.mcf_r	40	419	154	417	155	<b>418</b>	<b>155</b>	40	419	154	417	155	<b>418</b>	<b>155</b>
520.omnetpp_r	40	575	91.3	575	91.2	<b>575</b>	<b>91.3</b>	40	575	91.3	575	91.2	<b>575</b>	<b>91.3</b>
523.xalancbmk_r	40	<b>260</b>	<b>162</b>	260	162	261	162	40	<b>260</b>	<b>162</b>	260	162	261	162
525.x264_r	40	274	256	270	259	<b>272</b>	<b>257</b>	40	255	275	<b>258</b>	<b>271</b>	259	270
531.deepsjeng_r	40	456	100	<b>456</b>	<b>101</b>	456	101	40	449	102	449	102	<b>449</b>	<b>102</b>
541.leela_r	40	<b>752</b>	<b>88.1</b>	754	87.8	748	88.5	40	<b>752</b>	<b>88.1</b>	754	87.8	748	88.5
548.exchange2_r	40	460	228	461	228	<b>461</b>	<b>228</b>	40	460	228	461	228	<b>461</b>	<b>228</b>
557.xz_r	40	564	76.6	<b>563</b>	<b>76.8</b>	560	77.1	40	555	77.9	553	78.1	<b>554</b>	<b>78.0</b>

**SPECrate®2017\_int\_base = 123**

**SPECrate®2017\_int\_peak = 128**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The build date 20190815 in sw\_compiler is correct for the IC compiler.

The build\_date in Compiler Version Notes is incorrect.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/spec2017_19u5/lib/intel64:/spec2017_19u5/lib/ia32:/spec2017_19u5/jet5.0
     .1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The jemalloc library was configured and built at default for 32bit (i686) and 64bit (x86\_64) targets; built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

ENERGY\_PERF\_BIAS\_CFG mode = performance

SR-IOV Support = Disabled

CSM Support = Disabled

Engine Boost = Level3(Max)

LLC dead line allc = Disabled

Sysinfo program /spec2017\_19u5/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-628j Thu May 14 23:24:29 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
        2 "physical id"s (chips)
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Platform Notes (Continued)

```
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         46 bits physical, 48 bits virtual
CPU(s):                40
On-line CPU(s) list:  0-39
Thread(s) per core:   2
Core(s) per socket:   10
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
Stepping:               7
CPU MHz:               2400.000
CPU max MHz:           3200.0000
CPU min MHz:           1000.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              14080K
NUMA node0 CPU(s):    0-9,20-29
NUMA node1 CPU(s):    10-19,30-39
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
                      aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
                      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                      flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
                      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
                      avx512bw avx512vl xsaviopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
                      ospke avx512_vnni md_clear flush_l1d arch_capabilities
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 14080 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 385614 MB
node 0 free: 384287 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 387037 MB
node 1 free: 385884 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10
```

From /proc/meminfo

```
MemTotal:      791195880 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-628j 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional,

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Platform Notes (Continued)

RSB filling

run-level 3 May 14 00:59

SPEC is set to: /spec2017\_19u5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	932G	19G	913G	3%	/

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 6102 12/19/2019

Vendor: ASUSTeK COMPUTER INC.

Product: Z11PG-D24 Series

Product Family: Server

Serial: System Serial Number

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen  
Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5  
NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen  
Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5  
NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen  
Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5  
NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Compiler Version Notes (Continued)

=====

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5  
NextGen Technology Build 20190729  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Base Portability Flags (Continued)

525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -fllto
-mfpmath=sse -funroll-loops -qnextgen -fuse-lld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -fllto -mfpmath=sse
-funroll-loops -qnextgen -fuse-lld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc  
  
502.gcc\_r: -m32  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/ia32\_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib  
-ljemalloc  
  
505.mcf\_r: basepeak = yes  
  
525.x264\_r: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -flto -O3  
-ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc  
  
557.xz\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.40 GHz, Intel Xeon Silver 4210R)

SPECrate®2017\_int\_base = 123

SPECrate®2017\_int\_peak = 128

CPU2017 License: 9016

Test Date: May-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2019

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: -m64 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)  
<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revH.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)  
<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-14 11:24:28-0400.

Report generated on 2020-07-21 13:15:24 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-21.